



**PRODUCT RANGE-2025**

**WE DESIGN**

**WE CUSTOMISE**

**WE PERFORM**



## LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha Illumination isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha Illumination caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha Illumination to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha Illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.



## PRIVE INDOOR

(PREMIUM ARCHITECTURAL RANGE)

PAGE 1 TO 28

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

## PRIME INDOOR

(PROJECT & ECO RANG)

PAGE 29 TO 56

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.







## PRIVE OUTDOOR

(PREMIUM ARCHITECTURAL RANGE)

**PAGE 57 TO 65**

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

## PRIME OUTDOOR

(PROJECT & ECO RANG)

**PAGE 66 TO 92**

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.



# PRISHA

ILLUMINATION

PRISHA ILLUMINATION is about precision. In fact, it embraces precision as a given, while building in flexibility.

With over 20 years of experience in lighting industry especially retailing, the expertise is brought in as feedback to enable design change.

Interaction with client and end users, consultants, architects & designers, the PRISHA ILLUMINATION range is an effort to build a formidable set of lighting fixtures that answer today's lighting needs.

Immaculately Coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that PRISHA ILLUMINATION has taken care of while working at the fixture designs through quality making.





Considering LED has stormed the market in form of energy efficiency, lamps and fixtures made with the environment in mind, with optimum efficacy, is of utmost importance for PRISHA ILLUMINATION.


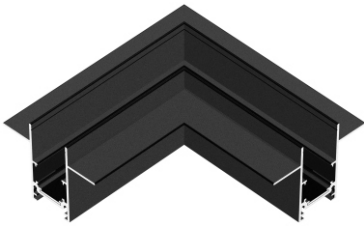

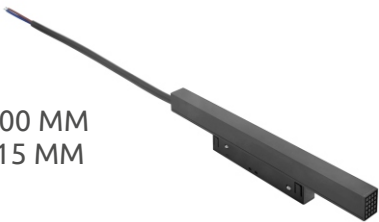




# PRIVE INDOOR



| PRODUCT DESCRIPTION                                                                                                                                                                                                                                      | PRODUCT                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <p> <b>FINISH &amp; MATERIAL</b> : MATT BLACK &amp; ALUMINIUM<br/> <b>MOUNTING</b> : SURFACE<br/> <b>DIMENSION</b> : 24 x 51 x 1000 </p>                                |  <p><b>PL15 - S1000</b></p>   |
| <p> <b>FINISH &amp; MATERIAL</b> : MATT BLACK &amp; ALUMINIUM<br/> <b>MOUNTING</b> : SURFACE<br/> <b>DIMENSION</b> : 24 x 51 x 2000 </p>                               |  <p><b>PL15 - S2000</b></p>   |
| <p> <b>FINISH &amp; MATERIAL</b> : MATT BLACK &amp; ALUMINIUM<br/> <b>MOUNTING</b> : RECESSED<br/> <b>DIMENSION</b> : 60 x 51 x 1000<br/> <b>CUT-OUT</b> : 24MM </p>  |  <p><b>PL15 - R1000</b></p> |
| <p> <b>FINISH &amp; MATERIAL</b> : MATT BLACK &amp; ALUMINIUM<br/> <b>MOUNTING</b> : RECESSED<br/> <b>DIMENSION</b> : 60 x 51 x 2000<br/> <b>CUT-OUT</b> : 24MM </p>  |  <p><b>PL15 - R2000</b></p> |

| PRODUCT DESCRIPTION                                                                                                                                                                       | PRODUCT                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>PL15 - M1</b></p>  <p>Hanging Accessories</p>                                                      | <p><b>PL15 - M2 (4 Wire)</b></p>  <p>Power Cord</p>                                                               |
| <p><b>PL15 - M3</b></p>  <p>Corner Connector</p>                                                         | <p><b>PL15 - M4</b></p>  <p>Straight Connector</p>                                                                |
| <p><b>PL15 - M5</b></p>  <p>Track Joiner Plate</p>                                                      | <p><b>PL15 - M6</b></p>  <p>Surface Joiner (L)</p>                                                               |
| <p><b>PL15 - M7</b></p>  <p>Recessed Joiner (L)</p>                                                    | <p><b>PL15 - M8</b></p>  <p>Ceiling to Wall Recessed Joiner</p>                                                 |
| <p><b>PL15 - 80W - 48V (2 Wires)</b></p>  <p>L : 260 MM<br/>W : 15 MM</p> <p>Power Supply (Driver)</p> | <p><b>PL15 - 150W - 48V (2 Wires/4 Wires)</b></p>  <p>L : 300 MM<br/>W : 15 MM</p> <p>Power Supply (Driver)</p> |

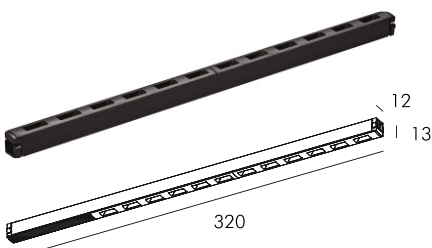
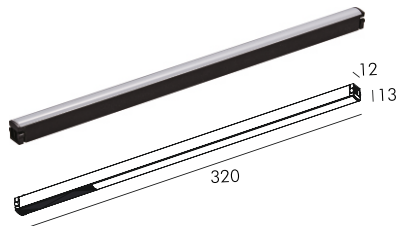



| PRODUCT DESCRIPTION |                          | PRODUCT                                                                                                      |
|---------------------|--------------------------|--------------------------------------------------------------------------------------------------------------|
| WATTS               | : 6W                     |  <p><b>PL15 - A1</b></p>   |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                              |
| BEAM ANGLE          | : 36°                    |                                                                                                              |
| CCT(K)              | : 3000K, 4000K           |                                                                                                              |
| CRI                 | : ≥ 90                   |                                                                                                              |
| DIMENSION           | : L118 x W15 x H42       |                                                                                                              |
| LUMENS              | : 600Lm                  |                                                                                                              |
| POWERED BY          | : OSRAM                  |                                                                                                              |
| INPUT               | : 48V DRIVER             |                                                                                                              |
| WATTS               | : 12W                    |  <p><b>PL15 - A2</b></p>   |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                              |
| BEAM ANGLE          | : 36°                    |                                                                                                              |
| CCT(K)              | : 3000K, 4000K           |                                                                                                              |
| CRI                 | : ≥ 90                   |                                                                                                              |
| DIMENSION           | : L232 x W15 x H42       |                                                                                                              |
| LUMENS              | : 1200Lm                 |                                                                                                              |
| POWERED BY          | : OSRAM                  |                                                                                                              |
| INPUT               | : 48V DRIVER             |                                                                                                              |
| WATTS               | : 10W                    |  <p><b>PL15 - A3</b></p>  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                              |
| BEAM ANGLE          | : 120°                   |                                                                                                              |
| CCT(K)              | : 3000K, 4000K           |                                                                                                              |
| CRI                 | : ≥ 90                   |                                                                                                              |
| DIMENSION           | : L300 x W15 x H22       |                                                                                                              |
| LUMENS              | : 900Lm                  |                                                                                                              |
| POWERED BY          | : OSRAM                  |                                                                                                              |
| INPUT               | : 48V DRIVER             |                                                                                                              |
| WATTS               | : 20W                    |  <p><b>PL15 - A4</b></p> |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                              |
| BEAM ANGLE          | : 120°                   |                                                                                                              |
| CCT(K)              | : 3000K, 4000K           |                                                                                                              |
| CRI                 | : ≥ 90                   |                                                                                                              |
| DIMENSION           | : L600 x W15 x H25       |                                                                                                              |
| LUMENS              | : 1800Lm                 |                                                                                                              |
| POWERED BY          | : OSRAM                  |                                                                                                              |
| INPUT               | : 48V DRIVER             |                                                                                                              |
| WATTS               | : 7W                     |  <p><b>PL15 - A5</b></p> |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                              |
| BEAM ANGLE          | : 24°                    |                                                                                                              |
| CCT(K)              | : 3000K, 4000K           |                                                                                                              |
| CRI                 | : ≥ 90                   |                                                                                                              |
| DIMENSION           | : Ø 35 x 80              |                                                                                                              |
| LUMENS              | : 770Lm                  |                                                                                                              |
| POWERED BY          | : BRIDGELUX              |                                                                                                              |
| INPUT               | : 48V DRIVER             |                                                                                                              |

| PRODUCT DESCRIPTION |                          | PRODUCT                                                                              |
|---------------------|--------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                    |    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                    |                                                                                      |
| CCT(K)              | : 3000K, 4000K           |                                                                                      |
| CRI                 | : ≥ 90                   |                                                                                      |
| DIMENSION           | : Ø 45 x 100             |                                                                                      |
| LUMENS              | : 1320Lm                 |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
| INPUT               | : 48V DRIVER             | <b>PL15 - A6</b>                                                                     |
| WATTS               | : 6W                     |    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                    |                                                                                      |
| CCT(K)              | : 3000K, 4000K           |                                                                                      |
| CRI                 | : ≥ 90                   |                                                                                      |
| DIMENSION           | : L118 x W15 x H100      |                                                                                      |
| LUMENS              | : 600Lm                  |                                                                                      |
| POWERED BY          | : OSRAM                  |                                                                                      |
| INPUT               | : 48V DRIVER             | <b>PL15 - A7</b>                                                                     |
| WATTS               | : 12W                    |   |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                    |                                                                                      |
| CCT(K)              | : 3000K, 4000K           |                                                                                      |
| CRI                 | : ≥ 90                   |                                                                                      |
| DIMENSION           | : L232 x W15 x H100      |                                                                                      |
| LUMENS              | : 1200Lm                 |                                                                                      |
| POWERED BY          | : OSRAM                  |                                                                                      |
| INPUT               | : 48V DRIVER             | <b>PL15 - A8</b>                                                                     |
| WATTS               | : 7W                     |   |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                    |                                                                                      |
| CCT(K)              | : 3000K, 4000K           |                                                                                      |
| CRI                 | : ≥ 90                   |                                                                                      |
| DIMENSION           | : Ø 25 x 300             |                                                                                      |
| LUMENS              | : 700Lm                  |                                                                                      |
| POWERED BY          | : BRIDGLUX               |                                                                                      |
| INPUT               | : 48V DRIVER             | <b>PL15 - A9</b>                                                                     |
| WATTS               | : 22W                    |  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K           |                                                                                      |
| CRI                 | : ≥ 90                   |                                                                                      |
| DIMENSION           | : Ø 27 x 600             |                                                                                      |
| LUMENS              | : 1980Lm                 |                                                                                      |
| POWERED BY          | : OSRAM                  |                                                                                      |
| INPUT               | : 48V DRIVER             | <b>PL15 - A10</b>                                                                    |

| PRODUCT DESCRIPTION                                                                                                                                                                                      |  | PRODUCT                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------|
| MOUNTING : SURFACE MOUNTED<br>FINISH : SAND BLACK<br>DIMENSION : 455 X 15 X 15 MM<br>IP : IP20                                                                                                           |  |  <p><b>PRR COCK 1</b></p>    |
| <b>POWER SUPPLY (DRIVER-24V) NOT INCLUDED</b>                                                                                                                                                            |  |                                                                                                                |
| MOUNTING : SURFACE MOUNTED<br>FINISH : SAND BLACK<br>DIMENSION : 955 X 15 X 15 MM<br>IP : IP20                                                                                                           |  |  <p><b>PRR COCK 2</b></p>    |
| <b>POWER SUPPLY (DRIVER-24V) NOT INCLUDED</b>                                                                                                                                                            |  |                                                                                                                |
| MOUNTING : BUCKLE (USE IN SHOWCASE)<br>MATERIAL : PC<br>SENSOR : GESTURE CONTROL SENSOR<br>IP : IP20<br>DIMENSION : 64 X 10 X 12 MM                                                                      |  |  <p><b>PRR SENSE 1</b></p>  |
| MOUNTING : BUCKLE (USE IN WARDROBE)<br>MATERIAL : PC<br>SENSOR : DOOR CONTROL SENSOR<br>IP : IP20<br>DIMENSION : 36 X 14 X 14 MM                                                                         |  |  <p><b>PRR SENSE 2</b></p> |
| WATTS : 3W<br>FINISH & MATERIAL : SAND BLACK ALUMINIUM + PC<br>BEAM ANGLE : 24°<br>CCT(K) : 3000K<br>CRI : RA>80<br>LUMEN : 240Lm<br>DIMENSION : 28 X 50 X 55<br>MOUNTING : BUCKLE<br>POWERED BY : OSRAM |  |  <p><b>PRR TAIL 1</b></p>  |



| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                              |
|---------------------|----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 6W                             |    |
| FINISH              | : SAND BLACK                     |                                                                                      |
| MATERIAL            | : ALUMINIUM + PC                 |                                                                                      |
| BEAM ANGLE          | : 90°                            |                                                                                      |
| CCT(K)              | : 3000K                          |                                                                                      |
| CRI                 | : Ra>80                          |                                                                                      |
| LUMEN               | : 40LM                           |                                                                                      |
| IP                  | : Ip20                           |                                                                                      |
| DIMENSION           | : 12x10x249MM                    |                                                                                      |
| MOUNTING            | : BUCKLE                         |                                                                                      |
| POWERED BY          | : BRIDGELUX SMD                  | <b>PRR TAIL 2 (NEW)</b>                                                              |
| WATTS               | : 5W                             |    |
| FINISH              | : SAND BLACK                     |                                                                                      |
| MATERIAL            | : ALUMINIUM + PC                 |                                                                                      |
| BEAM ANGLE          | : 120°                           |                                                                                      |
| CCT(K)              | : 3000K                          |                                                                                      |
| CRI                 | : Ra>80                          |                                                                                      |
| LUMEN               | : 30LM                           |                                                                                      |
| IP                  | : IP20                           |                                                                                      |
| DIMENSION           | : 12x10x249MM                    |                                                                                      |
| MOUNTING            | : BUCKLE                         |                                                                                      |
| POWERED BY          | : Bridgelux SMD                  | <b>PRR TAIL 3 (NEW)</b>                                                              |
| WATTS               | : 5W                             |   |
| FINISH              | : SAND BLACK                     |                                                                                      |
| MATERIAL            | : ALUMINIUM + PC                 |                                                                                      |
| BEAM ANGLE          | : 120° + Ø10°                    |                                                                                      |
| CCT(K)              | : 3000K                          |                                                                                      |
| CRI                 | : Ra>80                          |                                                                                      |
| LUMEN               | : 55LM                           |                                                                                      |
| IP                  | : IP20                           |                                                                                      |
| DIMENSION           | : 20.5x15x249MM                  |                                                                                      |
| MOUNTING            | : BUCKLE                         |                                                                                      |
| POWERED BY          | : Bridgelux                      | <b>PRR TAIL 4</b>                                                                    |
| WATTS               | : 5W                             |  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                      |
| BEAM ANGLE          | : 15-45° (Adjustable)            |                                                                                      |
| CCT(K)              | : 3000K                          |                                                                                      |
| LUMEN               | : 400LM                          |                                                                                      |
| IP                  | : IP20                           |                                                                                      |
| DIMENSION           | : 56 x 44 x 110MM                |                                                                                      |
| CUT-OUT             | : 35MM                           |                                                                                      |
| MOUNTING            | : RECESSED                       |                                                                                      |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                      |
| POWERED BY          | : OSRAM                          | <b>PRR CABY 1</b>                                                                    |
| WATTS               | : 5W                             |  |
| FINISH              | : SAND BLACK                     |                                                                                      |
| MATERIAL            | : ALUMINIUM                      |                                                                                      |
| BEAM ANGLE          | : 15-45° (Adjustable)            |                                                                                      |
| CCT(K)              | : 3000K                          |                                                                                      |
| LUMEN               | : 400LM                          |                                                                                      |
| IP                  | : IP20                           |                                                                                      |
| DIMENSION           | : 99 x 56 x 233MM                |                                                                                      |
| MOUNTING            | : RECESSED                       |                                                                                      |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                      |
| POWERED BY          | : OSRAM                          | <b>PRR CABY 2</b>                                                                    |




| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                                                        |
|---------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 2W                             |  <p><b>PRR CABY 3</b></p>    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 24°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| LUMEN               | : 180LM                          |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 56 x 44 x 27.5 MM              |                                                                                                                |
| CUT-OUT             | : 35MM                           |                                                                                                                |
| MOUNTING            | : RECESSED                       |                                                                                                                |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                                                |
| POWERED BY          | : OSRAM                          |                                                                                                                |
| WATTS               | : 2W                             |  <p><b>PRR CABY 4</b></p>    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 24°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| LUMEN               | : 180LM                          |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : D 34 x 16 MM                   |                                                                                                                |
| MOUNTING            | : SURFACE                        |                                                                                                                |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                                                |
| POWERED BY          | : OSRAM                          |                                                                                                                |
| WATTS               | : 10W                            |  <p><b>PRE FLOCK 1B</b></p> |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 38°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| CRI                 | : ≥ 85                           |                                                                                                                |
| DIMENSION           | : Ø 48 X H 120 MM                |                                                                                                                |
| LUMENS              | : 1050Lm                         |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |
| WATTS               | : 25W                            |                                                                                                                |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 10° V x 65° H                  |  <p><b>PRR WASH 1B</b></p> |
| CCT(K)              | : 3000K                          |                                                                                                                |
| CRI                 | : Ra>90                          |                                                                                                                |
| LUMEN               | : 2500LM                         |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 643 x 92 x 72 MM               |                                                                                                                |
| MOUNTING            | : RECESSED                       |                                                                                                                |
| CUT-OUT             | : 620 x 80 MM                    |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |
| WATTS               | : 25W                            |                                                                                                                |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |  <p><b>PRR WASH 2B</b></p> |
| BEAM ANGLE          | : 10° V x 65° H                  |                                                                                                                |
| CCT(K)              | : 3000K                          |                                                                                                                |
| CRI                 | : Ra>90                          |                                                                                                                |
| LUMEN               | : 2500LM                         |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 643 x 38 x 71 MM               |                                                                                                                |
| MOUNTING            | : SURFACE                        |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |

| PRODUCT DESCRIPTION |                          | PRODUCT                                                                                                         |
|---------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 35W                    |  <p><b>PRR WASHER</b></p>     |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM |                                                                                                                 |
| COVERAGE            | : 3 MTR. X 7 MTR.        |                                                                                                                 |
| CCT(K)              | : 3000K                  |                                                                                                                 |
| CRI                 | : Ra>90                  |                                                                                                                 |
| LUMEN               | : 3500LM                 |                                                                                                                 |
| IP                  | : IP20                   |                                                                                                                 |
| DIMENSION           | : 186 x 60 x 178 MM      |                                                                                                                 |
| MOUNTING            | : SURFACE                |                                                                                                                 |
| POWERED BY          | : BRIDGELUX              |                                                                                                                 |
| WATTS               | : 3W                     |  <p><b>PRR FLASH 1A</b></p>   |
| FINISH & MATERIAL   | : MATT WHITE             |                                                                                                                 |
| BEAM ANGLE          | : 24°                    |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K           |                                                                                                                 |
| CRI                 | : ≥ 90                   |                                                                                                                 |
| DIMENSION           | : Ø 20 X H 71 MM         |                                                                                                                 |
| CUT-OUT             | : Ø 18 MM                |                                                                                                                 |
| LUMENS              | : 270Lm                  |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.5                  |                                                                                                                 |
| POWERED BY          | : BRIDGELUX              |                                                                                                                 |
| WATTS               | : 3W                     |  <p><b>PRR FLASH 1B</b></p>  |
| FINISH & MATERIAL   | : MATT BLACK             |                                                                                                                 |
| BEAM ANGLE          | : 24°                    |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K           |                                                                                                                 |
| CRI                 | : ≥ 90                   |                                                                                                                 |
| DIMENSION           | : Ø 20 X H 71 MM         |                                                                                                                 |
| CUT-OUT             | : Ø 18 MM                |                                                                                                                 |
| LUMENS              | : 270Lm                  |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.5                  |                                                                                                                 |
| POWERED BY          | : BRIDGELUX              |                                                                                                                 |
| WATTS               | : 3W                     |  <p><b>PRR FLASH 1C</b></p> |
| FINISH & MATERIAL   | : NICKEL BLACK           |                                                                                                                 |
| BEAM ANGLE          | : 24°                    |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K           |                                                                                                                 |
| CRI                 | : ≥ 90                   |                                                                                                                 |
| DIMENSION           | : Ø 20 X H 71 MM         |                                                                                                                 |
| CUT-OUT             | : Ø 18 MM                |                                                                                                                 |
| LUMENS              | : 270Lm                  |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.5                  |                                                                                                                 |
| POWERED BY          | : BRIDGELUX              |                                                                                                                 |
| WATTS               | : 5W                     |  <p><b>PRR FLASH 2A</b></p>  |
| FINISH & MATERIAL   | : MATT WHITE             |                                                                                                                 |
| BEAM ANGLE          | : 24°                    |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K           |                                                                                                                 |
| CRI                 | : ≥ 90                   |                                                                                                                 |
| DIMENSION           | : Ø 29 X H 63 MM         |                                                                                                                 |
| CUT-OUT             | : Ø 25 MM                |                                                                                                                 |
| LUMENS              | : 450Lm                  |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.5                  |                                                                                                                 |
| POWERED BY          | : BRIDGELUX              |                                                                                                                 |

| PRODUCT DESCRIPTION |                                                                   | PRODUCT                                                                                                          |
|---------------------|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 5W                                                              |  <p><b>PRR FLASH 2B</b></p>     |
| FINISH & MATERIAL   | : MATT BLACK                                                      |                                                                                                                  |
| BEAM ANGLE          | : 24°                                                             |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K                                                    |                                                                                                                  |
| CRI                 | : ≥ 90                                                            |                                                                                                                  |
| DIMENSION           | : Ø 29 X H 63 MM                                                  |                                                                                                                  |
| CUT-OUT             | : Ø 25 MM                                                         |                                                                                                                  |
| LUMENS              | : 450Lm                                                           |                                                                                                                  |
| POWER FACTOR        | : ≥ 0.5                                                           |                                                                                                                  |
| POWERED BY          | : BRIDGELUX                                                       |                                                                                                                  |
| WATTS               | : 5W                                                              |  <p><b>PRR FLASH 2C</b></p>     |
| FINISH & MATERIAL   | : NICKEL BLACK                                                    |                                                                                                                  |
| BEAM ANGLE          | : 24°                                                             |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K                                                    |                                                                                                                  |
| CRI                 | : ≥ 90                                                            |                                                                                                                  |
| DIMENSION           | : Ø 29 X H 63 MM                                                  |                                                                                                                  |
| CUT-OUT             | : Ø 25 MM                                                         |                                                                                                                  |
| LUMENS              | : 450Lm                                                           |                                                                                                                  |
| POWER FACTOR        | : ≥ 0.5                                                           |                                                                                                                  |
| POWERED BY          | : BRIDGELUX                                                       |                                                                                                                  |
| WATTS               | : 7W                                                              |  <p><b>PRR GLASSO</b></p>     |
| MATERIAL            | : SAND WHITE + SMOKY GREY GLASS                                   |                                                                                                                  |
| BEAM ANGLE          | : 24°                                                             |                                                                                                                  |
| CCT(K)              | : 3000K                                                           |                                                                                                                  |
| CRI                 | : ≥ 90                                                            |                                                                                                                  |
| DIMENSION           | : 42 x 103 H MM                                                   |                                                                                                                  |
| GLASS DIMENSION     | : 30 x 41 MM                                                      |                                                                                                                  |
| CUT-OUT             | : Ø 35 MM                                                         |                                                                                                                  |
| LUMENS              | : 630Lm                                                           |                                                                                                                  |
|                     |                                                                   |                                                                                                                  |
| WATTS               | : 6W                                                              |  <p><b>PRR WESTOR 1A</b></p> |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM                                          |                                                                                                                  |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS) |                                                                                                                  |
| BEAM ANGLE          | : 15° / 24° / 36° / 50°                                           |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K                                                    |                                                                                                                  |
| CRI                 | : ≥ 90                                                            |                                                                                                                  |
| DIMENSION           | : Ø 50 X H 65 MM                                                  |                                                                                                                  |
| CUT-OUT             | : Ø 45 MM                                                         |                                                                                                                  |
| LUMENS              | : 750Lm                                                           |                                                                                                                  |
| POWERED BY          | : LUMINUS                                                         |                                                                                                                  |
| USP                 | : <b>FRONT OPENABLE</b>                                           |                                                                                                                  |
| WATTS               | : 6W                                                              |  <p><b>PRR WESTOR 1B</b></p> |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM                                          |                                                                                                                  |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS) |                                                                                                                  |
| BEAM ANGLE          | : 15° / 24° / 36° / 50°                                           |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K                                                    |                                                                                                                  |
| CRI                 | : ≥ 90                                                            |                                                                                                                  |
| DIMENSION           | : Ø 50 X H 65 MM                                                  |                                                                                                                  |
| CUT-OUT             | : Ø 45 MM                                                         |                                                                                                                  |
| LUMENS              | : 750Lm                                                           |                                                                                                                  |
| POWERED BY          | : LUMINUS                                                         |                                                                                                                  |
| USP                 | : <b>FRONT OPENABLE</b>                                           |                                                                                                                  |



| PRODUCT DESCRIPTION                                                                                                |                                                                   | PRODUCT                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| WATTS                                                                                                              | : 10W                                                             |                                       |
| FINISH & MATERIAL                                                                                                  | : MATT WHITE + ALUMINIUM                                          |                                                                                                                         |
| REFLECTOR                                                                                                          | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS) |                                                                                                                         |
| BEAM ANGLE                                                                                                         | : 15° / 24° / 36° / 50°                                           |                                                                                                                         |
| CCT(K)                                                                                                             | : 3000K, 4000K                                                    |                                                                                                                         |
| CRI                                                                                                                | : ≥ 90                                                            |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 50 X H 105 MM                                                 |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |
| LUMENS                                                                                                             | : 1250Lm                                                          |                                                                                                                         |
| POWERED BY                                                                                                         | : LUMINUS                                                         |                                                                                                                         |
| USP                                                                                                                | : <b>FRONT OPENABLE</b>                                           | <b>PRR WESTOR 2A</b>                                                                                                    |
| WATTS                                                                                                              | : 10W                                                             |                                       |
| FINISH & MATERIAL                                                                                                  | : MATT BLACK + ALUMINIUM                                          |                                                                                                                         |
| REFLECTOR                                                                                                          | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS) |                                                                                                                         |
| BEAM ANGLE                                                                                                         | : 15° / 24° / 36° / 50°                                           |                                                                                                                         |
| CCT(K)                                                                                                             | : 3000K, 4000K                                                    |                                                                                                                         |
| CRI                                                                                                                | : ≥ 90                                                            |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 50 X H 105 MM                                                 |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |
| LUMENS                                                                                                             | : 1250Lm                                                          |                                                                                                                         |
| POWERED BY                                                                                                         | : LUMINUS                                                         |                                                                                                                         |
| USP                                                                                                                | : <b>FRONT OPENABLE</b>                                           | <b>PRR WESTOR 2B</b>                                                                                                    |
| <b>PRR CARTER 1A (WHITE)</b>                                                                                       |                                                                   | <br>Included with WESTOR 1B & 2B     |
| <br>Included with WESTOR 1A & 2A |                                                                   |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 50 X H 18 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 50 X H 18 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |
| <b>PRR CARTER 2A (WHITE)</b>                                                                                       |                                                                   | <br><b>PRR CARTER 2B (BLACK)</b>    |
|                                 |                                                                   |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 60 X H 18 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 55 MM                                                         |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 60 X H 18 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 55 MM                                                         |                                                                                                                         |
| <b>PRR CARTER 3A (TRIMLESS)</b>                                                                                    |                                                                   | <br><b>PRR CARTER 3B (TRIMLESS)</b> |
|                                 |                                                                   |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 60 X H 10 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |
| DIMENSION                                                                                                          | : Ø 60 X H 10 MM                                                  |                                                                                                                         |
| CUT-OUT                                                                                                            | : Ø 45 MM                                                         |                                                                                                                         |

| PRODUCT DESCRIPTION                                                                                                                                                                       | PRODUCT                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>PRR CARTER 4A (WHITE)</b></p>  <p>DIMENSION : 60 X 60 X H 17 MM<br/>CUT-OUT : 55 X 55 MM</p>       | <p><b>PRR CARTER 4B (BLACK)</b></p>  <p>DIMENSION : 60 X 60 X H 17 MM<br/>CUT-OUT : 55 X 55 MM</p>       |
| <p><b>PRR CARTER 5A (WHITE)</b></p>  <p>DIMENSION : 112 X 61 X H 25 MM<br/>CUT-OUT : 105 X 55 MM</p>     | <p><b>PRR CARTER 5B (BLACK)</b></p>  <p>DIMENSION : 112 X 61 X H 25 MM<br/>CUT-OUT : 105 X 55 MM</p>     |
| <p><b>PRR CARTER 6A (WHITE)</b></p>  <p>DIMENSION : 162 X 61 X H 25 MM<br/>CUT-OUT : 105 X 55 MM</p>    | <p><b>PRR CARTER 6B (BLACK)</b></p>  <p>DIMENSION : 162 X 61 X H 25 MM<br/>CUT-OUT : 105 X 55 MM</p>    |
| <p><b>PRR CARTER 7A (WHITE)</b></p>  <p>DIMENSION : 112 X 112 X H 25 MM<br/>CUT-OUT : 105 X 105 MM</p> | <p><b>PRR CARTER 7B (BLACK)</b></p>  <p>DIMENSION : 112 X 112 X H 25 MM<br/>CUT-OUT : 105 X 105 MM</p> |
| <p><b>PRR CARTER 8A (WHITE)</b></p>  <p>DIMENSION : 262 X 61 X H 25 MM<br/>CUT-OUT : 205 X 55 MM</p>   | <p><b>PRR CARTER 8B (BLACK)</b></p>  <p>DIMENSION : 262 X 61 X H 25 MM<br/>CUT-OUT : 205 X 55 MM</p>   |


| PRODUCT DESCRIPTION |                                | PRODUCT                                                                              |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 15W                          |    |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM       |                                                                                      |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK |                                                                                      |
| BEAM ANGLE          | : 24° / 36° / 50°              |                                                                                      |
| CCT(K)              | : 3000K, 4000K                 |                                                                                      |
| CRI                 | : ≥ 90                         |                                                                                      |
| DIMENSION           | : Ø 61 X H 125 MM              |                                                                                      |
| CUT-OUT             | : Ø 55 MM                      |                                                                                      |
| LUMENS              | : 1875Lm                       |    |
| POWERED BY          | : LUMINUS                      |                                                                                      |
| WATTS               | : 15W                          |                                                                                      |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM       |                                                                                      |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK |                                                                                      |
| BEAM ANGLE          | : 24° / 36° / 50°              |                                                                                      |
| CCT(K)              | : 3000K, 4000K                 |                                                                                      |
| CRI                 | : ≥ 90                         |                                                                                      |
| DIMENSION           | : Ø 61 X H 125 MM              |                                                                                      |
| CUT-OUT             | : Ø 55 MM                      |                                                                                      |
| LUMENS              | : 1875Lm                       |                                                                                      |
| POWERED BY          | : LUMINUS                      |                                                                                      |
| WATTS               | : 15W                          |   |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 24° / 36° / 50°              |                                                                                      |
| CCT(K)              | : 3000K, 4000K                 |                                                                                      |
| CRI                 | : ≥ 90                         |                                                                                      |
| DIMENSION           | : Ø 61 X H 125 MM              |                                                                                      |
| CUT-OUT             | : Ø 55 MM                      |                                                                                      |
| LUMENS              | : 1875Lm                       |                                                                                      |
| POWERED BY          | : LUMINUS                      |                                                                                      |
| WATTS               | : 15W                          |  |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 24° / 36° / 50°              |                                                                                      |
| CCT(K)              | : 3000K, 4000K                 |                                                                                      |
| CRI                 | : ≥ 90                         |                                                                                      |
| DIMENSION           | : Ø 61 X H 125 MM              |                                                                                      |
| CUT-OUT             | : Ø 55 MM                      |                                                                                      |
| LUMENS              | : 1875Lm                       |                                                                                      |
| POWERED BY          | : LUMINUS                      |                                                                                      |
| WATTS               | : 25W                          |  |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM       |                                                                                      |
| REFLECTOR           | : NICKEL BLACK                 |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K                 |                                                                                      |
| CRI                 | : ≥ 90                         |                                                                                      |
| DIMENSION           | : Ø 81 X H 145 MM              |                                                                                      |
| CUT-OUT             | : Ø 75 MM                      |                                                                                      |
| LUMENS              | : 3125Lm                       |                                                                                      |
| POWERED BY          | : LUMINUS                      |                                                                                      |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                              |
|---------------------|------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 10W                              |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                      |
| REFLECTOR           | : SHINE BLACK / CHROME (GLARELESS) |                                                                                      |
| BEAM ANGLE          | : 15° OR 36°                       |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K              |                                                                                      |
| CRI                 | : ≥ 90                             |                                                                                      |
| DIMENSION           | : 72 x 76 H MM                     |                                                                                      |
| CUT-OUT             | : Ø 65 MM                          |                                                                                      |
| LUMENS              | : 1200Lm                           |                                                                                      |
| POWERED BY          | : CREE                             |                                                                                      |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT             | <b>PRR GLEAM 1A</b>                                                                  |
| WATTS               | : 10W                              |    |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM           |                                                                                      |
| REFLECTOR           | : SHINE BLACK / CHROME (GLARELESS) |                                                                                      |
| BEAM ANGLE          | : 15° OR 36°                       |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K              |                                                                                      |
| CRI                 | : ≥ 90                             |                                                                                      |
| DIMENSION           | : 72 x 76 H MM                     |                                                                                      |
| CUT-OUT             | : Ø 65 MM                          |                                                                                      |
| LUMENS              | : 1200Lm                           |                                                                                      |
| POWERED BY          | : CREE                             |                                                                                      |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT             | <b>PRR GLEAM 1B</b>                                                                  |
| WATTS               | : 15W                              |   |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                      |
| REFLECTOR           | : SHINE BLACK / CHROME (GLARELESS) |                                                                                      |
| BEAM ANGLE          | : 15° OR 36°                       |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K              |                                                                                      |
| CRI                 | : ≥ 90                             |                                                                                      |
| DIMENSION           | : 88 x 88 H MM                     |                                                                                      |
| CUT-OUT             | : Ø 80 MM                          |                                                                                      |
| LUMENS              | : 1800Lm                           |                                                                                      |
| POWERED BY          | : CREE                             |                                                                                      |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT             | <b>PRR GLEAM 2A</b>                                                                  |
| WATTS               | : 15W                              |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM           |                                                                                      |
| REFLECTOR           | : SHINE BLACK / CHROME (GLARELESS) |                                                                                      |
| BEAM ANGLE          | : 15° OR 36°                       |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K              |                                                                                      |
| CRI                 | : ≥ 90                             |                                                                                      |
| DIMENSION           | : 88 x 88 H MM                     |                                                                                      |
| CUT-OUT             | : Ø 80 MM                          |                                                                                      |
| LUMENS              | : 1800Lm                           |                                                                                      |
| POWERED BY          | : CREE                             |                                                                                      |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT             | <b>PRR GLEAM 2B</b>                                                                  |
| WATTS               | : 10W                              |  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                      |
| REFLECTOR           | : SHINE BLACK (GLARELESS)          |                                                                                      |
| BEAM ANGLE          | : 36°                              |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K              |                                                                                      |
| CRI                 | : ≥ 90                             |                                                                                      |
| DIMENSION           | : 86 x 76 H MM                     |                                                                                      |
| CUT-OUT             | : Ø 55 MM                          |                                                                                      |
| LUMENS              | : 1200Lm                           |                                                                                      |
| POWERED BY          | : CREE                             |                                                                                      |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT             | <b>PRR GLASPEN 1A</b>                                                                |

| PRODUCT DESCRIPTION |                                                | PRODUCT                                                                                                            |
|---------------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 15W                                          |  <p><b>PRR GLASPEN 2A</b></p>    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM                       |                                                                                                                    |
| REFLECTOR           | : SHINE BLACK (GLARELESS)                      |                                                                                                                    |
| BEAM ANGLE          | : 36°                                          |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K, 5000K                          |                                                                                                                    |
| CRI                 | : ≥ 90                                         |                                                                                                                    |
| DIMENSION           | : 108 x 95 H MM                                |                                                                                                                    |
| CUT-OUT             | : Ø 75 MM                                      |                                                                                                                    |
| LUMENS              | : 1200Lm                                       |                                                                                                                    |
| POWERED BY          | : CREE                                         |                                                                                                                    |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT                         |                                                                                                                    |
| WATTS               | : 8W Adjustable                                |  <p><b>PRR GLOW 1A / 1B</b></p>  |
| MATERIAL            | : MATT WHITE & BLACK & ALUMINIUM               |                                                                                                                    |
| REFLECTOR           | : MATT WHITE, MATT BLACK, CHROME & SHINE BLACK |                                                                                                                    |
| BEAM ANGLE          | : 36°                                          |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K, 5000K                          |                                                                                                                    |
| CRI                 | : ≥ 90                                         |                                                                                                                    |
| DIMENSION           | : 82 x H 46 MM                                 |                                                                                                                    |
| CUT-OUT             | : Ø 75                                         |                                                                                                                    |
| LUMENS              | : 960Lm                                        |                                                                                                                    |
| POWERED BY          | : CREE                                         |                                                                                                                    |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT                         |                                                                                                                    |
| WATTS               | : 12W Adjustable                               |                                                                                                                    |
| MATERIAL            | : MATT WHITE & BLACK & ALUMINIUM               |                                                                                                                    |
| REFLECTOR           | : MATT WHITE, MATT BLACK, CHROME & SHINE BLACK |                                                                                                                    |
| BEAM ANGLE          | : 36°                                          |  <p><b>PRR GLOW 2A / 2B</b></p> |
| CCT(K)              | : 3000K, 4000K, 5000K                          |                                                                                                                    |
| CRI                 | : ≥ 90                                         |                                                                                                                    |
| DIMENSION           | : 82 x H 46 MM                                 |                                                                                                                    |
| CUT-OUT             | : Ø 75                                         |                                                                                                                    |
| LUMENS              | : 1440Lm                                       |                                                                                                                    |
| POWERED BY          | : CREE                                         |                                                                                                                    |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT                         |                                                                                                                    |
| WATTS               | : 9W                                           |  <p><b>PRR GINI 1A</b></p>     |
| MATERIAL            | : SAND WHITE + BLACK                           |                                                                                                                    |
| BEAM ANGLE          | : 15° / 36°                                    |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K, 5000K                          |                                                                                                                    |
| CRI                 | : ≥ 90                                         |                                                                                                                    |
| DIMENSION           | : 44 x 90 H MM                                 |                                                                                                                    |
| CUT-OUT             | : Ø 40 MM                                      |                                                                                                                    |
| LUMENS              | : 960Lm                                        |                                                                                                                    |
| POWERED BY          | : CREE                                         |                                                                                                                    |
| DRIVER              | : BAG OR EQUIVALENT                            |                                                                                                                    |
| WATTS               | : 9W                                           |  <p><b>PRR GINI 1B</b></p>     |
| MATERIAL            | : SAND BLACK + BLACK                           |                                                                                                                    |
| BEAM ANGLE          | : 15° / 36°                                    |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K, 5000K                          |                                                                                                                    |
| CRI                 | : ≥ 90                                         |                                                                                                                    |
| DIMENSION           | : 44 x 90 H MM                                 |                                                                                                                    |
| CUT-OUT             | : Ø 40 MM                                      |                                                                                                                    |
| LUMENS              | : 960Lm                                        |                                                                                                                    |
| POWERED BY          | : CREE                                         |                                                                                                                    |
| DRIVER              | : BAG OR EQUIVALENT                            |                                                                                                                    |



| PRODUCT DESCRIPTION |                           | PRODUCT                                                                              |
|---------------------|---------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 10W                     |    |
| MATERIAL            | : SAND BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : L 147 x W 45 x H 42 MM  |                                                                                      |
| CUT-OUT             | : L 142 x W 37 MM         |                                                                                      |
| LUMENS              | : 900Lm                   |                                                                                      |
| POWERED BY          | : OSRAM                   | <b>PRR LUMI 1B</b>                                                                   |
| WATTS               | : 20W                     |    |
| MATERIAL            | : SAND BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : L 280 x W 45 x H 42 MM  |                                                                                      |
| CUT-OUT             | : L 275 x W 37 MM         |                                                                                      |
| LUMENS              | : 1800Lm                  |                                                                                      |
| POWERED BY          | : OSRAM                   | <b>PRR LUMI 2B</b>                                                                   |
| WATTS               | : 9W                      |   |
| MATERIAL            | : SAND BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 35 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 900Lm                   |                                                                                      |
| POWERED BY          | : OSRAM                   | <b>PRR LUMI 3B</b>                                                                   |
| WATTS               | : 2 X 7 W                 |  |
| MATERIAL            | : SAND BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 38°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : L 112 x W 112 x H 88 MM |                                                                                      |
| CUT-OUT             | : L 100 x W 100 MM        |                                                                                      |
| LUMENS              | : 1150Lm                  |                                                                                      |
| POWERED BY          | : OSRAM                   | <b>PRR RIGA 1B</b>                                                                   |
| WATTS               | : 4 X 7 W                 |  |
| MATERIAL            | : SAND BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 38°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : L 194 x W 112 x H 88 MM |                                                                                      |
| CUT-OUT             | : L 180 x W 100 MM        |                                                                                      |
| LUMENS              | : 2300Lm                  |                                                                                      |
| POWERED BY          | : OSRAM                   | <b>PRR RIGA 2B</b>                                                                   |

| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                                                              |
|---------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 3 X 2W                         |  <p><b>PRR LINEA-DOT 1A</b></p>    |
| MATERIAL            | : SAND WHITE + BLACK & ALUMINIUM |                                                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                      |
| CRI                 | : ≥ 90                           |                                                                                                                      |
| DIMENSION           | : L 81 x W 31 x H 50 MM          |                                                                                                                      |
| CUT-OUT             | : L 75 x W 25 MM                 |                                                                                                                      |
| LUMENS              | : 660Lm                          |                                                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                      |
| WATTS               | : 5 X 2W                         |  <p><b>PRR LINEA-DOT 2A</b></p>    |
| MATERIAL            | : SAND WHITE + BLACK & ALUMINIUM |                                                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                      |
| CRI                 | : ≥ 90                           |                                                                                                                      |
| DIMENSION           | : L 121 x W 31 x H 50 MM         |                                                                                                                      |
| CUT-OUT             | : L 115 x W 25 MM                |                                                                                                                      |
| LUMENS              | : 1100Lm                         |                                                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                      |
| WATTS               | : 9 X 2W                         |  <p><b>PRR LINEA-DOT 3A</b></p>   |
| MATERIAL            | : SAND WHITE + BLACK & ALUMINIUM |                                                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                      |
| CRI                 | : ≥ 90                           |                                                                                                                      |
| DIMENSION           | : L 76 x W 76 x H 50 MM          |                                                                                                                      |
| CUT-OUT             | : L 70 x W 70 MM                 |                                                                                                                      |
| LUMENS              | : 1980Lm                         |                                                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                      |
| WATTS               | : 1 X 5W                         |  <p><b>PRR LINEA-SPOT 1A</b></p> |
| MATERIAL            | : SAND WHITE + BLACK & ALUMINIUM |                                                                                                                      |
| BEAM ANGLE          | : 35°                            |                                                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                      |
| CRI                 | : ≥ 90                           |                                                                                                                      |
| DIMENSION           | : L 56 x W 56 x H 45 MM          |                                                                                                                      |
| CUT-OUT             | : L 50 x W 50 MM                 |                                                                                                                      |
| LUMENS              | : 550Lm                          |                                                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                      |
| WATTS               | : 2 X 5 W                        |  <p><b>PRR LINEA-SPOT 2A</b></p> |
| MATERIAL            | : SAND BLACK & ALUMINIUM         |                                                                                                                      |
| BEAM ANGLE          | : 35°                            |                                                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                      |
| CRI                 | : ≥ 90                           |                                                                                                                      |
| DIMENSION           | : L 99 x W 45 x H 56 MM          |                                                                                                                      |
| CUT-OUT             | : L 90 x W 50 MM                 |                                                                                                                      |
| LUMENS              | : 1100Lm                         |                                                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                      |

| PRODUCT DESCRIPTION |                             | PRODUCT                                                                                                            |
|---------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 3 X 5 W                   |  <p><b>PRR LINEA-SPOT 3A</b></p> |
| MATERIAL            | : SAND BLACK & ALUMINIUM    |                                                                                                                    |
| BEAM ANGLE          | : 35°                       |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K              |                                                                                                                    |
| CRI                 | : ≥ 90                      |                                                                                                                    |
| DIMENSION           | : L 142 x W 56 x H 45 MM    |                                                                                                                    |
| CUT-OUT             | : L 135 x W 50 MM           |                                                                                                                    |
| LUMENS              | : 1650Lm                    |                                                                                                                    |
| POWERED BY          | : BRIDGELUX                 |                                                                                                                    |
| WATTS               | : 12W                       |  <p><b>PRR DINO 1A</b></p>       |
| FINISH              | : SAND WHITE + SAND WHITE   |                                                                                                                    |
| BEAM ANGLE          | : 36°                       |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K              |                                                                                                                    |
| CRI                 | : ≥ 90                      |                                                                                                                    |
| DIMENSION           | : Ø 85 x 88 MM              |                                                                                                                    |
| CUT-OUT             | : Ø 75 MM                   |                                                                                                                    |
| LUMENS              | : 1200Lm                    |                                                                                                                    |
| POWERED BY          | : CREE                      |                                                                                                                    |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>     |                                                                                                                    |
| WATTS               | : 12W                       |  <p><b>PRR DINO 1B</b></p>      |
| FINISH              | : SAND BLACK + SAND BLACK   |                                                                                                                    |
| BEAM ANGLE          | : 36°                       |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K              |                                                                                                                    |
| CRI                 | : ≥ 90                      |                                                                                                                    |
| DIMENSION           | : Ø 85 x 88 MM              |                                                                                                                    |
| CUT-OUT             | : Ø 75 MM                   |                                                                                                                    |
| LUMENS              | : 1200Lm                    |                                                                                                                    |
| POWERED BY          | : CREE                      |                                                                                                                    |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>     |                                                                                                                    |
| WATTS               | : 12W                       |  <p><b>PRR DINO 1C</b></p>     |
| FINISH              | : SAND WHITE + NICKEL BLACK |                                                                                                                    |
| BEAM ANGLE          | : 36°                       |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K              |                                                                                                                    |
| CRI                 | : ≥ 90                      |                                                                                                                    |
| DIMENSION           | : Ø 85 x 88 MM              |                                                                                                                    |
| CUT-OUT             | : Ø 75 MM                   |                                                                                                                    |
| LUMENS              | : 1200Lm                    |                                                                                                                    |
| POWERED BY          | : CREE                      |                                                                                                                    |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>     |                                                                                                                    |
| WATTS               | : 12W                       |  <p><b>PRR ENZO 1A</b></p>     |
| FINISH              | : SAND WHITE + SAND WHITE   |                                                                                                                    |
| BEAM ANGLE          | : 36°                       |                                                                                                                    |
| CCT(K)              | : 3000K, 4000K              |                                                                                                                    |
| CRI                 | : ≥ 90                      |                                                                                                                    |
| DIMENSION           | : Ø 85 x 88 MM              |                                                                                                                    |
| CUT-OUT             | : Ø 75 MM                   |                                                                                                                    |
| LUMENS              | : 1200Lm                    |                                                                                                                    |
| POWERED BY          | : CREE                      |                                                                                                                    |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>     |                                                                                                                    |

| PRODUCT DESCRIPTION |                           | PRODUCT                                                                              |
|---------------------|---------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                     |    |
| FINISH              | : SAND BLACK + SAND BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 88 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 1200Lm                  |                                                                                      |
| POWERED BY          | : CREE                    |                                                                                      |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>   |                                                                                      |
| WATTS               | : 12W                     |    |
| FINISH              | : SAND WHITE + SAND WHITE |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 88 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 1200Lm                  |                                                                                      |
| POWERED BY          | : CREE                    |                                                                                      |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>   |                                                                                      |
| WATTS               | : 12W                     |   |
| FINISH              | : SAND BLACK + SAND BLACK |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 88 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 1200Lm                  |                                                                                      |
| POWERED BY          | : CREE                    |                                                                                      |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>   |                                                                                      |
| WATTS               | : 12W                     |  |
| FINISH              | : SAND WHITE + SAND WHITE |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 88 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 1200Lm                  |                                                                                      |
| POWERED BY          | : CREE                    |                                                                                      |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>   |                                                                                      |
| WATTS               | : 12W                     |  |
| FINISH              | : SAND BLACK + SAND BLACK |                                                                                      |
| CCT(K)              | : 3000K, 4000K            |                                                                                      |
| CRI                 | : ≥ 90                    |                                                                                      |
| DIMENSION           | : Ø 85 x 88 MM            |                                                                                      |
| CUT-OUT             | : Ø 75 MM                 |                                                                                      |
| LUMENS              | : 1200Lm                  |                                                                                      |
| POWERED BY          | : CREE                    |                                                                                      |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>   |                                                                                      |

| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                                                             |
|---------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 8W                            |  <p><b>PRR GLADE ELITE 1</b></p>  |
| MATERIAL            | : MATT GREY + WHITE & ALUMINIUM |                                                                                                                     |
| BEAM ANGLE          | : 15° OR 38° OR 60°             |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K, 5000K           |                                                                                                                     |
| CRI                 | : ≥ 90                          |                                                                                                                     |
| DIMENSION           | : Ø 70 x H 65 MM                |                                                                                                                     |
| CUT-OUT             | : Ø 60 MM                       |                                                                                                                     |
| LUMENS              | : 840Lm                         |                                                                                                                     |
| POWERED BY          | : CREE                          |                                                                                                                     |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT          |                                                                                                                     |
| WATTS               | : 12W                           |  <p><b>PRR GLADE ELITE 2</b></p>  |
| MATERIAL            | : MATT GREY + WHITE & ALUMINIUM |                                                                                                                     |
| BEAM ANGLE          | : 15° OR 38° OR 60°             |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K, 5000K           |                                                                                                                     |
| CRI                 | : ≥ 90                          |                                                                                                                     |
| DIMENSION           | : Ø 85 x H 75 MM                |                                                                                                                     |
| CUT-OUT             | : Ø 75 MM                       |                                                                                                                     |
| LUMENS              | : 1440Lm                        |                                                                                                                     |
| POWERED BY          | : CREE                          |                                                                                                                     |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT          |                                                                                                                     |
| WATTS               | : 20W                           |  <p><b>PRR GLADE ELITE 3</b></p> |
| MATERIAL            | : MATT GREY + WHITE & ALUMINIUM |                                                                                                                     |
| BEAM ANGLE          | : 15° OR 38° OR 60°             |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K, 5000K           |                                                                                                                     |
| CRI                 | : ≥ 90                          |                                                                                                                     |
| DIMENSION           | : Ø 95 x H 85 MM                |                                                                                                                     |
| CUT-OUT             | : Ø 85 MM                       |                                                                                                                     |
| LUMENS              | : 2400Lm                        |                                                                                                                     |
| POWERED BY          | : CREE                          |                                                                                                                     |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT          |                                                                                                                     |
| WATTS               | : 8W                            |  <p><b>PRR OPTICAL 1</b></p>    |
| FINISH              | : WHITE                         |                                                                                                                     |
| MATERIAL            | : ALUMINIUM                     |                                                                                                                     |
| BEAM ANGLE          | : 15° OR 38° OR 60°             |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K, 5000K           |                                                                                                                     |
| CRI                 | : ≥ 90                          |                                                                                                                     |
| DIMENSION           | : Ø 62 x H 85 MM                |                                                                                                                     |
| CUT-OUT             | : Ø 55 MM                       |                                                                                                                     |
| LUMENS              | : 840Lm                         |                                                                                                                     |
| DRIVER              | : FULHAM OR EQUIVALENT          |                                                                                                                     |
| POWER BY            | : CREE                          |                                                                                                                     |
| USP                 | : <b>FRONT OPENABLE</b>         |                                                                                                                     |
| WATTS               | : 12W                           |  <p><b>PRR OPTICAL 2</b></p>    |
| FINISH              | : WHITE                         |                                                                                                                     |
| MATERIAL            | : ALUMINIUM                     |                                                                                                                     |
| BEAM ANGLE          | : 15° OR 38° OR 60°             |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K, 5000K           |                                                                                                                     |
| CRI                 | : ≥ 90                          |                                                                                                                     |
| DIMENSION           | : Ø 84 x H 100 MM               |                                                                                                                     |
| CUT-OUT             | : Ø 75 MM                       |                                                                                                                     |
| LUMENS              | : 1440Lm                        |                                                                                                                     |
| DRIVER              | : FULHAM OR EQUIVALENT          |                                                                                                                     |
| POWER BY            | : CREE                          |                                                                                                                     |
| USP                 | : <b>FRONT OPENABLE</b>         |                                                                                                                     |

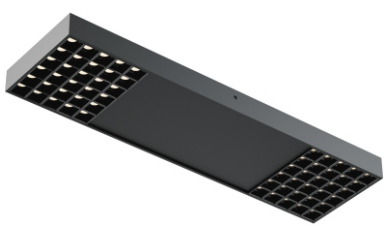


| PRODUCT DESCRIPTION |                         | PRODUCT                                                                                                        |
|---------------------|-------------------------|----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 20W                   |  <p><b>PRR OPTICAL 3</b></p> |
| FINISH              | : WHITE                 |                                                                                                                |
| MATERIAL            | : ALUMINIUM             |                                                                                                                |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                |
| CRI                 | : ≥ 90                  |                                                                                                                |
| DIMENSION           | : Ø 110 x H 128 MM      |                                                                                                                |
| CUT-OUT             | : Ø 95 MM               |                                                                                                                |
| LUMENS              | : 2400Lm                |                                                                                                                |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                |
| POWER BY            | : CREE                  |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                |
| WATTS               | : 8W                    |  <p><b>PRR LUXUS 1A</b></p>   |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM     |                                                                                                                |
| REFLECTOR           | : BLACK                 |                                                                                                                |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                |
| CRI                 | : ≥ 90                  |                                                                                                                |
| DIMENSION           | : Ø 62 x H 86 MM        |                                                                                                                |
| CUT-OUT             | : Ø 55 MM               |                                                                                                                |
| LUMENS              | : 840Lm                 |                                                                                                                |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                |
| POWER BY            | : CREE                  |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                |
| WATTS               | : 8W                    |  <p><b>PRR LUXUS 1B</b></p>  |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM     |                                                                                                                |
| REFLECTOR           | : BLACK                 |                                                                                                                |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                |
| CRI                 | : ≥ 90                  |                                                                                                                |
| DIMENSION           | : Ø 62 x H 86 MM        |                                                                                                                |
| CUT-OUT             | : Ø 55 MM               |                                                                                                                |
| LUMENS              | : 840Lm                 |                                                                                                                |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                |
| POWER BY            | : CREE                  |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                |
| WATTS               | : 12W                   |  <p><b>PRR LUXUS 2A</b></p> |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM     |                                                                                                                |
| REFLECTOR           | : BLACK                 |                                                                                                                |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                |
| CRI                 | : ≥ 90                  |                                                                                                                |
| DIMENSION           | : Ø 84 x H 104 MM       |                                                                                                                |
| CUT-OUT             | : Ø 75 MM               |                                                                                                                |
| LUMENS              | : 1440Lm                |                                                                                                                |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                |
| POWER BY            | : CREE                  |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                |
| WATTS               | : 12W                   |  <p><b>PRR LUXUS 2B</b></p> |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM     |                                                                                                                |
| REFLECTOR           | : BLACK                 |                                                                                                                |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                |
| CRI                 | : ≥ 90                  |                                                                                                                |
| DIMENSION           | : Ø 84 x H 104 MM       |                                                                                                                |
| CUT-OUT             | : Ø 75 MM               |                                                                                                                |
| LUMENS              | : 1440Lm                |                                                                                                                |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                |
| POWER BY            | : CREE                  |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                |

| PRODUCT DESCRIPTION                                                                                                                                                                                                                                                                                                                                                  |  | PRODUCT                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------|
| WATTS : 20W<br>FINISH & MATERIAL : WHITE & ALUMINIUM<br>REFLECTOR : BLACK<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 110 x H 127 MM<br>CUT-OUT : Ø 95 MM<br>LUMENS : 2400Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP</b> : <b>FRONT OPENABLE</b><br>DRIVER(ON/OFF) : FULHAM OR EQUIVALENT |  |  <p><b>PRR LUXUS 3A</b></p>   |
| WATTS : 20W<br>FINISH & MATERIAL : BLACK & ALUMINIUM<br>REFLECTOR : BLACK<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 110 x H 127 MM<br>CUT-OUT : Ø 95 MM<br>LUMENS : 2400Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP</b> : <b>FRONT OPENABLE</b><br>DRIVER(ON/OFF) : FULHAM OR EQUIVALENT |  |  <p><b>PRR LUXUS 3B</b></p>   |
| WATTS : 10W (ADJUSTABLE)<br><b>IP RATING</b> : <b>IP65</b><br>MATERIAL : SAND WHITE+NICKEL BLACK<br>BEAM ANGLE : 38°<br>CCT(K) : 3000K, 4000K<br>CRI : ≥ 90<br>DIMENSION : Ø 62 x H 85 MM<br>CUT-OUT : Ø 55 MM<br>LUMENS : 1100Lm<br>POWERED BY : OSRAM<br>DRIVER : IP65 HC POWER                                                                                    |  |  <p><b>PRR GLITZ 1A</b></p>  |
| WATTS : 18W (ADJUSTABLE)<br><b>IP RATING</b> : <b>IP65</b><br>MATERIAL : SAND WHITE+NICKEL BLACK<br>BEAM ANGLE : 38°<br>CCT(K) : 3000K, 4000K<br>CRI : ≥ 90<br>DIMENSION : Ø 84 x H 110 MM<br>CUT-OUT : Ø 75 MM<br>LUMENS : 1980Lm<br>POWERED BY : OSRAM<br>DRIVER : IP65 HC POWER                                                                                   |  |  <p><b>PRR GLITZ 2A</b></p> |
| WATTS : 30W (ADJUSTABLE)<br><b>IP RATING</b> : <b>IP65</b><br>MATERIAL : SAND WHITE+NICKEL BLACK<br>BEAM ANGLE : 38°<br>CCT(K) : 3000K, 4000K<br>CRI : ≥ 90<br>DIMENSION : Ø 110 x H 130 MM<br>CUT-OUT : Ø 95 MM<br>LUMENS : 3300Lm<br>POWERED BY : OSRAM<br>DRIVER : IP65 HC POWER                                                                                  |  |  <p><b>PRR GLITZ 3A</b></p> |


| PRODUCT DESCRIPTION |                            | PRODUCT                                                                              |
|---------------------|----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                      |    |
| <b>IP RATING</b>    | : <b>IP44</b>              |                                                                                      |
| MATERIAL            | : SAND WHITE + ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 36°                      |                                                                                      |
| CCT(K)              | : 3000K, 4000K             |                                                                                      |
| CRI                 | : ≥ 90                     |                                                                                      |
| DIMENSION           | : Ø 82 x H 62 MM           |                                                                                      |
| CUT-OUT             | : Ø 75 MM                  |                                                                                      |
| LUMENS              | : 960Lm                    |    |
| POWERED BY          | : CREE                     |                                                                                      |
| WATTS               | : 12W                      |                                                                                      |
| <b>IP RATING</b>    | : <b>IP44</b>              |                                                                                      |
| MATERIAL            | : SAND BLACK + ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 36°                      |                                                                                      |
| CCT(K)              | : 3000K, 4000K             |                                                                                      |
| CRI                 | : ≥ 90                     |                                                                                      |
| DIMENSION           | : Ø 82 x H 62 MM           |                                                                                      |
| CUT-OUT             | : Ø 75 MM                  |                                                                                      |
| LUMENS              | : 960Lm                    |   |
| POWERED BY          | : CREE                     |                                                                                      |
| WATTS               | : 8W                       |                                                                                      |
| <b>IP RATING</b>    | : <b>IP44</b>              |                                                                                      |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND WHITE & BLACK INNER |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 15° / 36° / 55°          |                                                                                      |
| LUMEN               | : 960Lm                    |  |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 74 X H 99 MM           |                                                                                      |
| POWERED BY          | : CREE                     |                                                                                      |
| WATTS               | : 15W                      |                                                                                      |
| <b>IP RATING</b>    | : <b>IP44</b>              |                                                                                      |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND WHITE & BLACK INNER |                                                                                      |
| CRI                 | : 90                       |  |
| BEAM ANGLE          | : 15° / 36° / 55°          |                                                                                      |
| LUMEN               | : 1800Lm                   |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 94 X H 115 MM          |                                                                                      |
| POWERED BY          | : CREE                     |                                                                                      |
| WATTS               | : 8W                       |                                                                                      |
| <b>IP RATING</b>    | : <b>IP44</b>              |                                                                                      |
| MATERIAL            | : ALUMINIUM                |  |
| FINISH              | : SAND BLACK & BLACK INNER |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 15° / 36° / 55°          |                                                                                      |
| LUMEN               | : 960Lm                    |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 74 X H 99 MM           |                                                                                      |
| POWERED BY          | : CREE                     |                                                                                      |


| PRODUCT DESCRIPTION |                                      | PRODUCT                                                                                                          |
|---------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 15W                                |  <p><b>PRR NARIO 2B</b></p>    |
| <b>IP RATING</b>    | : <b>IP44</b>                        |                                                                                                                  |
| MATERIAL            | : ALUMINIUM                          |                                                                                                                  |
| FINISH              | : SAND BLACK & BLACK INNER           |                                                                                                                  |
| CRI                 | : 90                                 |                                                                                                                  |
| BEAM ANGLE          | : 15° / 36° / 55°                    |                                                                                                                  |
| LUMEN               | : 1800Lm                             |                                                                                                                  |
| CCT                 | : 3000K, 4000K                       |                                                                                                                  |
| DIMENSION           | : Ø 94 X H 115 MM                    |                                                                                                                  |
| POWERED BY          | : CREE                               |                                                                                                                  |
| WATTS               | : 8W                                 |  <p><b>PRR NARIO 1C</b></p>    |
| <b>IP RATING</b>    | : <b>IP44</b>                        |                                                                                                                  |
| MATERIAL            | : ALUMINIUM                          |                                                                                                                  |
| FINISH              | : BRASS & BLACK INNER                |                                                                                                                  |
| CRI                 | : 90                                 |                                                                                                                  |
| BEAM ANGLE          | : 15° / 36° / 55°                    |                                                                                                                  |
| LUMEN               | : 960Lm                              |                                                                                                                  |
| CCT                 | : 3000K, 4000K                       |                                                                                                                  |
| DIMENSION           | : Ø 74 X H 99 MM                     |                                                                                                                  |
| POWERED BY          | : CREE                               |                                                                                                                  |
| WATTS               | : 15W                                |  <p><b>PRR NARIO 2C</b></p>   |
| <b>IP RATING</b>    | : <b>IP44</b>                        |                                                                                                                  |
| MATERIAL            | : ALUMINIUM                          |                                                                                                                  |
| FINISH              | : BRASS & BLACK INNER                |                                                                                                                  |
| CRI                 | : 90                                 |                                                                                                                  |
| BEAM ANGLE          | : 15° / 36° / 55°                    |                                                                                                                  |
| LUMEN               | : 1800Lm                             |                                                                                                                  |
| CCT                 | : 3000K, 4000K                       |                                                                                                                  |
| DIMENSION           | : Ø 94 X H 115 MM                    |                                                                                                                  |
| POWERED BY          | : CREE                               |                                                                                                                  |
| WATTS               | : 3W <b>(UP)</b> + 7W <b>(DOWN)</b>  |  <p><b>PRR REGENT 1B</b></p> |
| MATERIAL            | : ALUMINIUM                          |                                                                                                                  |
| FINISH              | : SAND BLACK                         |                                                                                                                  |
| CRI                 | : 90                                 |                                                                                                                  |
| BEAM ANGLE          | : 24°                                |                                                                                                                  |
| LUMEN               | : 630Lm                              |                                                                                                                  |
| CCT                 | : 3000K, 4000K                       |                                                                                                                  |
| DIMENSION           | : Ø 113 X 90 MM                      |                                                                                                                  |
| POWERED BY          | : EPISTAR                            |                                                                                                                  |
| WATTS               | : 3W <b>(UP)</b> + 15W <b>(DOWN)</b> |  <p><b>PRR REGENT 2B</b></p> |
| MATERIAL            | : ALUMINIUM                          |                                                                                                                  |
| FINISH              | : SAND BLACK                         |                                                                                                                  |
| CRI                 | : 90                                 |                                                                                                                  |
| BEAM ANGLE          | : 24°                                |                                                                                                                  |
| LUMEN               | : 1350Lm                             |                                                                                                                  |
| CCT                 | : 3000K, 4000K                       |                                                                                                                  |
| DIMENSION           | : Ø 138 X 90 MM                      |                                                                                                                  |
| POWERED BY          | : EPISTAR                            |                                                                                                                  |

| PRODUCT DESCRIPTION |                            | PRODUCT                                                                              |
|---------------------|----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 6W                       |    |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND BLACK               |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 24°                      |                                                                                      |
| LUMEN               | : 500Lm                    |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : L 85 X W 35 X H 65 MM    |                                                                                      |
| POWERED BY          | : OSRAM                    | <b>PRR MABEL 1B</b>                                                                  |
| WATTS               | : 10W                      |    |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND BLACK               |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 24°                      |                                                                                      |
| LUMEN               | : 800Lm                    |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : L 138 X W 35 X H 65 MM   |                                                                                      |
| POWERED BY          | : OSRAM                    | <b>PRR MABEL 2B</b>                                                                  |
| WATTS               | : 4 X 1.5 W                |   |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND WHITE & BLACK INNER |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 24°                      |                                                                                      |
| LUMEN               | : 660Lm                    |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : 200 X 28 x H 50 MM       |                                                                                      |
| POWERED BY          | : BRIDGELUX                | <b>PRR LINEA-LINE 1A</b>                                                             |
| WATTS               | : 8 X 1.5 W                |  |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND WHITE & BLACK INNER |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 24°                      |                                                                                      |
| LUMEN               | : 1320Lm                   |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : 400 X 28 x H 50 MM       |                                                                                      |
| POWERED BY          | : BRIDGELUX                | <b>PRR LINEA-LINE 2A</b>                                                             |
| WATTS               | : 20W                      |  |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : BLACK & BLACK INNER      |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 36°                      |                                                                                      |
| LUMEN               | : 1800Lm                   |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : 340 X 113 x H 26 MM      |                                                                                      |
| POWERED BY          | : CREE                     | <b>PRR JACK 1B</b>                                                                   |

| PRODUCT DESCRIPTION |                             | PRODUCT                                                                              |
|---------------------|-----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                        |     |
| MATERIAL            | : ALUMINIUM                 |                                                                                      |
| FINISH              | : SAND BLACK                |                                                                                      |
| CRI                 | : 90                        |                                                                                      |
| BEAM ANGLE          | : 32°                       |                                                                                      |
| LUMEN               | : 630Lm                     |                                                                                      |
| CCT                 | : 3000K, 4000K              |                                                                                      |
| DIMENSION           | : Ø 35 X (140x1) X H 395 MM |                                                                                      |
| POWERED BY          | : CREE                      |                                                                                      |
|                     |                             | <b>PRR UNICO 1B</b>                                                                  |
| WATTS               | : 2 X 7 W                   |     |
| MATERIAL            | : ALUMINIUM                 |                                                                                      |
| FINISH              | : SAND BLACK                |                                                                                      |
| CRI                 | : 90                        |                                                                                      |
| BEAM ANGLE          | : 32°                       |                                                                                      |
| LUMEN               | : 1260Lm                    |                                                                                      |
| CCT                 | : 3000K, 4000K              |                                                                                      |
| DIMENSION           | : Ø 35 X (140x2) X H 430 MM |                                                                                      |
| POWERED BY          | : CREE                      |                                                                                      |
|                     |                             | <b>PRR UNICO 2B</b>                                                                  |
| WATTS               | : 7W                        |    |
| MATERIAL            | : ALUMINIUM                 |                                                                                      |
| FINISH              | : SAND BLACK                |                                                                                      |
| CRI                 | : 90                        |                                                                                      |
| BEAM ANGLE          | : 36°                       |                                                                                      |
| LUMEN               | : 630Lm                     |                                                                                      |
| CCT                 | : 3000K, 4000K              |                                                                                      |
| DIMENSION           | : Ø 64 X H 196 MM           |                                                                                      |
| POWERED BY          | : CREE                      |                                                                                      |
|                     |                             | <b>PRR FALL 1B</b>                                                                   |
| WATTS               | : 7W                        |   |
| MATERIAL            | : ALUMINIUM                 |                                                                                      |
| FINISH              | : SAND BLACK                |                                                                                      |
| CRI                 | : 90                        |                                                                                      |
| BEAM ANGLE          | : 36°                       |                                                                                      |
| LUMEN               | : 630Lm                     |                                                                                      |
| CCT                 | : 3000K, 4000K              |                                                                                      |
| DIMENSION           | : Ø 64 X H 326 MM           |                                                                                      |
| POWERED BY          | : CREE                      |                                                                                      |
|                     |                             | <b>PRR FALL 2B</b>                                                                   |
| WATTS               | : 10W                       |  |
| MATERIAL            | : ALUMINIUM                 |                                                                                      |
| FINISH              | : SAND BLACK                |                                                                                      |
| CRI                 | : 90                        |                                                                                      |
| BEAM ANGLE          | : 20° X 35° (Adjustable)    |                                                                                      |
| LUMEN               | : 900Lm                     |                                                                                      |
| CCT                 | : 3000K                     |                                                                                      |
| DIMENSION           | : Ø 45 X H 160 MM           |                                                                                      |
| POWERED BY          | : CREE                      |                                                                                      |
|                     |                             | <b>PRR LENS</b>                                                                      |



| PRODUCT DESCRIPTION |                              | PRODUCT                                                                                                         |
|---------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |  <p><b>PRR IDO 1A</b></p>     |
| MATERIAL            | : ALUMINIUM DIE-CAST         |                                                                                                                 |
| FINISH              | : WHITE                      |                                                                                                                 |
| CRI                 | : RA>90                      |                                                                                                                 |
| BEAM ANGLE          | : 36°                        |                                                                                                                 |
| LUMEN               | : 1656Lm                     |                                                                                                                 |
| <b>DIMMING</b>      | : <b>350mA TRIAC DIMMING</b> |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : 102 X H 84 MM              |                                                                                                                 |
| ADJUST. ANGLE       | : LAMP HEAD 0 ~ 45° / 350°   |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 12W                        |  <p><b>PRR IDO 1B</b></p>     |
| MATERIAL            | : ALUMINIUM DIE-CAST         |                                                                                                                 |
| FINISH              | : BLACK                      |                                                                                                                 |
| CRI                 | : RA>90                      |                                                                                                                 |
| BEAM ANGLE          | : 36°                        |                                                                                                                 |
| LUMEN               | : 1656Lm                     |                                                                                                                 |
| <b>DIMMING</b>      | : <b>350mA TRIAC DIMMING</b> |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : 102 X H 84 MM              |                                                                                                                 |
| ADJUST. ANGLE       | : LAMP HEAD 0 ~ 45° / 350°   |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 5W (ASYMETRIC ANGLE)       |  <p><b>PRR PRACO 1A</b></p>  |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND WHITE + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 310Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 56 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
|                     |                              |                                                                                                                 |
| WATTS               | : 5W (ASYMETRIC ANGLE)       |  <p><b>PRR PRACO 1B</b></p> |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND BLACK + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 310Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 56 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
|                     |                              |                                                                                                                 |
| WATTS               | : 2 X 5W (ASYMETRIC ANGLE)   |  <p><b>PRR PRACO 2A</b></p> |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND WHITE + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 690Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 99 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
|                     |                              |                                                                                                                 |

| PRODUCT DESCRIPTION |                            | PRODUCT                                                                              |
|---------------------|----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 5W (ASYMETRIC ANGLE) |    |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND BLACK + BLACK       |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 65° + 26° ∠ 18°          |                                                                                      |
| LUMEN               | : 690Lm                    |    |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 99 X 56 X 70 MM        |                                                                                      |
| POWERED BY          | : BRIDGELUX                |                                                                                      |
|                     |                            | <b>PRR PRACO 2B</b>                                                                  |
| WATTS               | : 20W                      |   |
| MATERIAL            | : ALUMINIUM + PC           |                                                                                      |
| FINISH              | : SAND BLACK + GOLD        |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 110°                     |                                                                                      |
| LUMEN               | : 4200Lm                   |  |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 400 X 85 MM            |                                                                                      |
| <b>DIMMING</b>      | : <b>TRIAC DIMMABLE</b>    |                                                                                      |
| POWERED BY          | : EVERLITE                 |                                                                                      |
|                     |                            | <b>PRR LORENZO 1B</b>                                                                |
| WATTS               | : 60W                      |  |
| MATERIAL            | : ALUMINIUM + PC           |                                                                                      |
| FINISH              | : SAND BLACK + GOLD        |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 110°                     |                                                                                      |
| LUMEN               | : 7200Lm                   |  |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 600 X 85 MM            |                                                                                      |
| <b>DIMMING</b>      | : <b>TRIAC DIMMABLE</b>    |                                                                                      |
| POWERED BY          | : EVERLITE                 |                                                                                      |
|                     |                            | <b>PRR LORENZO 2B</b>                                                                |
| POWER               | : 33W SMD & 7W SPOT        |  |
| MATERIAL            | : ALUMINIUM & ACRYLIC      |                                                                                      |
| FINISH              | : BLACK + BLACK SPOT       |                                                                                      |
| CRI                 | : RA>90                    |                                                                                      |
| BEAM ANGLE (SPOT)   | : 36°                      |                                                                                      |
| LUMEN               | : 3200Lm                   |  |
| CCT                 | : SMD 4000K & SPOT 3000K   |                                                                                      |
| DIMENSION           | : 400 X 70 MM              |                                                                                      |
| POWERED BY          | : CITIZEN                  |                                                                                      |
|                     |                            | <b>PRR AURA</b>                                                                      |


# PRIME INDOOR



| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                                                                                          |
|---------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| WATT                | : 12W                           |  <p><b>PRO VEGA 1A / 1B</b><br/><b>PRO VEGA XP 1A / 1B</b></p> |
| FINISH & MATERIAL   | : WHITE/BLACK + ALUMINIUM       |                                                                                                                                                  |
| CCT(K)              | : 3000K , 4000K , 5000K, 6000K  |                                                                                                                                                  |
| CRI                 | : ≥80                           |                                                                                                                                                  |
| BEAM ANGLE          | : 110°                          |                                                                                                                                                  |
| DIMENSION           | : 119 X H 53 MM                 |                                                                                                                                                  |
| CUT-OUT             | : Ø 110 MM                      |                                                                                                                                                  |
| LUMEN               | : 1080Lm                        |                                                                                                                                                  |
| DRIVER              | : PRISHA OR EQUIVALENT          |                                                                                                                                                  |
| DRIVER XP           | : BAG & EQUIVALENT              |                                                                                                                                                  |
| POWERED BY          | : BRIDGELUX                     |                                                                                                                                                  |
| WATT                | : 18W                           |  <p><b>PRO VEGA 2A / 2B</b><br/><b>PRO VEGA XP 2A / 2B</b></p> |
| FINISH & MATERIAL   | : WHITE/BLACK + ALUMINIUM       |                                                                                                                                                  |
| CCT(K)              | : 3000K , 4000K , 5000K, 6000K  |                                                                                                                                                  |
| CRI                 | : ≥80                           |                                                                                                                                                  |
| BEAM ANGLE          | : 110°                          |                                                                                                                                                  |
| DIMENSION           | : 154 X H 53 MM                 |                                                                                                                                                  |
| CUT-OUT             | : Ø 146 MM                      |                                                                                                                                                  |
| LUMEN               | : 1620Lm                        |                                                                                                                                                  |
| DRIVER              | : PRISHA OR EQUIVALENT          |                                                                                                                                                  |
| DRIVER XP           | : BAG & EQUIVALENT              |                                                                                                                                                  |
| POWERED BY          | : BRIDGELUX                     |                                                                                                                                                  |
| WATT                | : 10W                           |  <p><b>PRE NEO 1A / 1B</b></p>                                |
| MATERIAL            | : ALUMINUM                      |                                                                                                                                                  |
| FINISH              | : WHITE / BLACK                 |                                                                                                                                                  |
| CCT(K)              | : 3000K , 4000K , 5000K, 6000K  |                                                                                                                                                  |
| CRI                 | : >80                           |                                                                                                                                                  |
| BEAM ANGLE          | : 110°                          |                                                                                                                                                  |
| DIAMENTION          | : 90 MM × H 58MM                |                                                                                                                                                  |
| CUT-OUT             | : 86 MM                         |                                                                                                                                                  |
| LUMEN               | : 1000Lm                        |                                                                                                                                                  |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT |                                                                                                                                                  |
| POWERED BY          | : BRIDGELUX                     |                                                                                                                                                  |
| WATT                | : 16W                           |  <p><b>PRE NEO 2A / 2B</b></p>                               |
| MATERIAL            | : ALUMINUM                      |                                                                                                                                                  |
| FINISH              | : WHITE / BLACK                 |                                                                                                                                                  |
| CCT(K)              | : 3000K , 4000K , 5000K, 6000K  |                                                                                                                                                  |
| CRI                 | : >80                           |                                                                                                                                                  |
| BEAM ANGLE          | : 110°                          |                                                                                                                                                  |
| DIAMENTION          | : 100 MM × H 58MM               |                                                                                                                                                  |
| CUT-OUT             | : 95 MM                         |                                                                                                                                                  |
| LUMEN               | : 1600Lm                        |                                                                                                                                                  |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT |                                                                                                                                                  |
| POWERED BY          | : BRIDGELUX                     |                                                                                                                                                  |
| WATTS               | : 7W                            |  <p><b>SNIP GRACE 1A (ROUND)</b></p>                         |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM        |                                                                                                                                                  |
| BEAM ANGLE          | : 120°                          |                                                                                                                                                  |
| CCT(K)              | : 3000K, 4000K, 6000K           |                                                                                                                                                  |
| DIMENSION           | : 90 X H 30 MM                  |                                                                                                                                                  |
| CUT-OUT             | : 75 MM                         |                                                                                                                                                  |
| POWERED BY          | : BRIDGELUX                     |                                                                                                                                                  |



| PRODUCT DESCRIPTION |                          | PRODUCT                                                                              |
|---------------------|--------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 16W                    |    |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K    |                                                                                      |
| DIMENSION           | : 120 X H 30 MM          |                                                                                      |
| CUT-OUT             | : 105 MM                 |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
|                     |                          | <b>SNIP GRACE 2A (ROUND)</b>                                                         |
| WATTS               | : 24W                    |    |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K    |                                                                                      |
| DIMENSION           | : 170 X H 30 MM          |                                                                                      |
| CUT-OUT             | : 155 MM                 |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
|                     |                          | <b>SNIP GRACE 3A (ROUND)</b>                                                         |
| WATTS               | : 7W                     |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K    |                                                                                      |
| DIMENSION           | : 90 X 90 X H 30 MM      |                                                                                      |
| CUT-OUT             | : 75 X 75 MM             |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
|                     |                          | <b>SNIP GRACE 1B (SQUARE)</b>                                                        |
| WATTS               | : 16W                    |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K    |                                                                                      |
| DIMENSION           | : 120 X 120 X H 30 MM    |                                                                                      |
| CUT-OUT             | : 105 X 105 MM           |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
|                     |                          | <b>SNIP GRACE 2B (SQUARE)</b>                                                        |
| WATTS               | : 24W                    |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                   |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K    |                                                                                      |
| DIMENSION           | : 170 X 170 X H 30 MM    |                                                                                      |
| CUT-OUT             | : 155 X 155 MM           |                                                                                      |
| POWERED BY          | : BRIDGELUX              |                                                                                      |
|                     |                          | <b>SNIP GRACE 3B (SQUARE)</b>                                                        |

| PRODUCT DESCRIPTION |                                | PRODUCT                                                                                                                         |
|---------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 8W                           |  <p><b>PRE TUBO 1A / 1B</b></p>               |
| MATERIAL            | : ALUMINIUM                    |                                                                                                                                 |
| FINISH              | : SAND WHITE/BLACK             |                                                                                                                                 |
| BEAM ANGLE          | : 120°                         |                                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                                                                 |
| CRI                 | : ≥ 80                         |                                                                                                                                 |
| DIMENSION           | : 100 x H 50 MM                |                                                                                                                                 |
| LUMENS              | : 720Lm                        |                                                                                                                                 |
| POWERED BY          | : BRIDGELUX                    |                                                                                                                                 |
| WATTS               | : 15W                          |  <p><b>PRE TUBO 2A / 2B</b></p>               |
| MATERIAL            | : ALUMINIUM                    |                                                                                                                                 |
| FINISH              | : SAND WHITE/BLACK             |                                                                                                                                 |
| BEAM ANGLE          | : 120°                         |                                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                                                                 |
| CRI                 | : ≥ 80                         |                                                                                                                                 |
| DIMENSION           | : 125 x H 50 MM                |                                                                                                                                 |
| LUMENS              | : 1350Lm                       |                                                                                                                                 |
| POWERED BY          | : BRIDGELUX                    |                                                                                                                                 |
| WATTS               | : 18W                          |  <p><b>PRE LEAD 1A / 1B (SUSPENDED)</b></p>  |
| MATERIAL            | : ALUMINIUM                    |                                                                                                                                 |
| FINISH & MATERIAL   | : MATT WHITE / BLACK           |                                                                                                                                 |
| DIFFUSER            | : PREMIUM HIGH TRANSMISSION PC |                                                                                                                                 |
| BEAM ANGLE          | : 110°                         |                                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                                                                 |
| CRI                 | : ≥ 80                         |                                                                                                                                 |
| DIMENSION           | : 590 X 50 X H 70 MM           |                                                                                                                                 |
| DRIVER              | : PRISHA ISOLATED              |                                                                                                                                 |
| POWERED BY          | : BRIDGELUX                    |                                                                                                                                 |
| WATTS               | : 18W                          |  <p><b>PRE LEAD 1C (SUSPENDED)</b></p>      |
| MATERIAL            | : ALUMINIUM                    |                                                                                                                                 |
| FINISH              | : WOODEN FINISH                |                                                                                                                                 |
| DIFFUSER            | : PREMIUM HIGH TRANSMISSION PC |                                                                                                                                 |
| BEAM ANGLE          | : 110°                         |                                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                                                                 |
| CRI                 | : ≥ 80                         |                                                                                                                                 |
| DIMENSION           | : 590 X 50 X H 70 MM           |                                                                                                                                 |
| DRIVER              | : PRISHA ISOLATED              |                                                                                                                                 |
| POWERED BY          | : BRIDGELUX                    |                                                                                                                                 |
| WATTS               | : 36W                          |  <p><b>PRE LEAD 2A / 2B (SUSPENDED)</b></p> |
| MATERIAL            | : ALUMINIUM                    |                                                                                                                                 |
| FINISH              | : MATT WHITE / BLACK           |                                                                                                                                 |
| DIFFUSER            | : PREMIUM HIGH TRANSMISSION PC |                                                                                                                                 |
| BEAM ANGLE          | : 110°                         |                                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                                                                 |
| CRI                 | : ≥ 80                         |                                                                                                                                 |
| DIMENSION           | : 1180 X 50 X H 70 MM          |                                                                                                                                 |
| DRIVER              | : PRISHA ISOLATED              |                                                                                                                                 |
| POWERED BY          | : BRIDGELUX                    |                                                                                                                                 |



| PRODUCT DESCRIPTION |                                | PRODUCT                                                                              |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 36W                          |    |
| MATERIAL            | : ALUMINIUM                    |                                                                                      |
| FINISH              | : WOODEN FINISH                |                                                                                      |
| DIFFUSER            | : PREMIUM HIGH TRANSMISSION PC |                                                                                      |
| BEAM ANGLE          | : 110°                         |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                      |
| CRI                 | : ≥ 80                         |                                                                                      |
| DIMENSION           | : 1180 X 50 X H 70 MM          |                                                                                      |
| DRIVER              | : PRISHA ISOLATED              |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
|                     |                                | <b>PRE LEAD 2C (SUSPENDED)</b>                                                       |
| WATTS               | : 3W                           |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K , 6000K         |                                                                                      |
| CRI                 | : ≥ 85                         |                                                                                      |
| DIMENSION           | : 37 X H 26 MM                 |                                                                                      |
| CUT-OUT             | : Ø 32 MM                      |                                                                                      |
| LUMENS              | : 270Lm                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    | <b>PRE COM 1A</b>                                                                    |
| WATTS               | : 3W                           |   |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K , 6000K         |                                                                                      |
| CRI                 | : ≥ 85                         |                                                                                      |
| DIMENSION           | : 37 X H 26 MM                 |                                                                                      |
| CUT-OUT             | : Ø 32 MM                      |                                                                                      |
| LUMENS              | : 270Lm                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    | <b>PRE COM 1B</b>                                                                    |
| WATTS               | : 7W                           |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 24°                          |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K      |                                                                                      |
| CRI                 | : ≥80                          |                                                                                      |
| DIMENSION           | : 60 X H 52MM                  |                                                                                      |
| CUT-OUT             | : 50MM                         |                                                                                      |
| LUMENS              | : 630Lm                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    | <b>PRE PURE</b>                                                                      |
| WATTS               | : 3W                           |  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K , 6000K         |                                                                                      |
| CRI                 | : ≥ 85                         |                                                                                      |
| DIMENSION           | : 65 X H 40 MM                 |                                                                                      |
| CUT-OUT             | : Ø 55 MM                      |                                                                                      |
| LUMENS              | : 270Lm                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    | <b>PRE COSTA 1</b>                                                                   |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                                                         |
|---------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 7W                               |  <p><b>PRE COSTA 2</b></p>    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K       |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| DIMENSION           | : 85 X H 60 MM                     |                                                                                                                 |
| CUT-OUT             | : Ø 75 MM                          |                                                                                                                 |
| LUMENS              | : 630Lm                            |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 12W                              |  <p><b>PRE COSTA 3</b></p>    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K , 6000K             |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| DIMENSION           | : 108 X H 68 MM                    |                                                                                                                 |
| CUT-OUT             | : Ø 95 MM                          |                                                                                                                 |
| LUMENS              | : 1080Lm                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 18W                              |  <p><b>PRE COSTA 4</b></p>   |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K       |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| DIMENSION           | : 128 X H 80 MM                    |                                                                                                                 |
| CUT-OUT             | : Ø 116 MM                         |                                                                                                                 |
| LUMENS              | : 1620Lm                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 24W                              |  <p><b>PRE COSTA 5</b></p>  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K , 6000K             |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| DIMENSION           | : 136 X H 80 MM                    |                                                                                                                 |
| CUT-OUT             | : Ø 120 MM                         |                                                                                                                 |
| LUMENS              | : 2160Lm                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 7W                               |  <p><b>PRE DIVINE 1</b></p> |
| FINISH & MATERIAL   | : MATT WHITE WITH GREY & ALUMINIUM |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K , 6000K      |                                                                                                                 |
| DIMENSION           | : 60 X H 70 MM                     |                                                                                                                 |
| CUT-OUT             | : Ø 50 MM                          |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| LUMENS              | : 630Lm                            |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.95                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                                                         |
|---------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                              |  <p><b>PRE DIVINE 2</b></p>   |
| FINISH & MATERIAL   | : MATT WHITE WITH GREY & ALUMINIUM |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K , 6000K      |                                                                                                                 |
| DIMENSION           | : 80 X H 80 MM                     |                                                                                                                 |
| CUT-OUT             | : Ø 72 MM                          |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| LUMENS              | : 1080Lm                           |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.95                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 18W                              |  <p><b>PRE DIVINE 3</b></p>   |
| FINISH & MATERIAL   | : MATT WHITE WITH GREY & ALUMINIUM |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K , 6000K      |                                                                                                                 |
| DIMENSION           | : 92 X H 100 MM                    |                                                                                                                 |
| CUT-OUT             | : Ø 80 MM                          |                                                                                                                 |
| CRI                 | : ≥ 85                             |                                                                                                                 |
| LUMENS              | : 1620Lm                           |                                                                                                                 |
| POWER FACTOR        | : ≥ 0.95                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 7W                               |  <p><b>PRE DIVITE 1</b></p>  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K       |                                                                                                                 |
| DIMENSION           | : 60 X H 70 MM                     |                                                                                                                 |
| CUT-OUT             | : Ø 50 MM                          |                                                                                                                 |
| CRI                 | : ≥85                              |                                                                                                                 |
| LUMENS              | : 630Lm                            |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 12W                              |  <p><b>PRE DIVITE 2</b></p> |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K       |                                                                                                                 |
| DIMENSION           | : 80 X H 80 MM                     |                                                                                                                 |
| CUT-OUT             | : Ø 72 MM                          |                                                                                                                 |
| CRI                 | : ≥85                              |                                                                                                                 |
| LUMENS              | : 1080Lm                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |
| WATTS               | : 18W                              |  <p><b>PRE DIVITE 3</b></p> |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM           |                                                                                                                 |
| BEAM ANGLE          | : 36°                              |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K       |                                                                                                                 |
| DIMENSION           | : 92 X H 100 MM                    |                                                                                                                 |
| CUT-OUT             | : Ø 80 MM                          |                                                                                                                 |
| CRI                 | : ≥85                              |                                                                                                                 |
| LUMENS              | : 1620Lm                           |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                        |                                                                                                                 |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 30W                        |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K        |                                                                                      |
| DIMENSION           | : 108 X H 120 MM             |                                                                                      |
| CUT-OUT             | : Ø 100 MM                   |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| LUMENS              | : 3000Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE DIVITE 4</b>                                                                  |
| WATTS               | : 7W                         |    |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| DIMENSION           | : 60 X H 70 MM               |                                                                                      |
| CUT-OUT             | : Ø 50 MM                    |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE DIVITE 1B</b>                                                                 |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| DIMENSION           | : 80 X H 80 MM               |                                                                                      |
| CUT-OUT             | : Ø 72 MM                    |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE DIVITE 2B</b>                                                                 |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| DIMENSION           | : 92 X H 100 MM              |                                                                                      |
| CUT-OUT             | : Ø 80 MM                    |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE DIVITE 3B</b>                                                                 |
| WATTS               | : 7W                         |  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 59 X H 60 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 1</b>                                                                    |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 82 X H 71 MM               |                                                                                      |
| CUT-OUT             | : Ø 72 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 2</b>                                                                    |
| WATTS               | : 18W                        |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 98 X H 86 MM               |                                                                                      |
| CUT-OUT             | : Ø 90 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 3</b>                                                                    |
| WATTS               | : 30W                        |   |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K        |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 118 X H 125 MM             |                                                                                      |
| CUT-OUT             | : Ø 106 MM                   |                                                                                      |
| LUMENS              | : 2700Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 4</b>                                                                    |
| WATTS               | : 7W                         |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 59 X H 60 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 1B</b>                                                                   |
| WATTS               | : 12W                        |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 82 X H 71 MM               |                                                                                      |
| CUT-OUT             | : Ø 72 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 2B</b>                                                                   |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 18W                        |    |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 98 X H 86 MM               |                                                                                      |
| CUT-OUT             | : Ø 90 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE COST 3B</b>                                                                   |
| WATTS               | : 7W                         |    |
| FINISH & MATERIAL   | : ROSE GOLD & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 59 X H 60 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE GOLD 1</b>                                                                    |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : ROSE GOLD & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 82 X H 71 MM               |                                                                                      |
| CUT-OUT             | : Ø 72 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE GOLD 2</b>                                                                    |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : ROSE GOLD & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 98 X H 86 MM               |                                                                                      |
| CUT-OUT             | : Ø 90 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE GOLD 3</b>                                                                    |
| WATTS               | : 12W                        |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 67 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 1A</b>                                                                   |




| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 67 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 1B</b>                                                                   |
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : GUN BLACK & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 67 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 1C</b>                                                                   |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : ROSE GOLD & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 67 MM               |                                                                                      |
| CUT-OUT             | : Ø 52 MM                    |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 1D</b>                                                                   |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 75 MM               |                                                                                      |
| CUT-OUT             | : Ø 65 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 2A</b>                                                                   |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 75 MM               |                                                                                      |
| CUT-OUT             | : Ø 65 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 2B</b>                                                                   |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 18W                        |    |
| FINISH & MATERIAL   | : GUN BLACK & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 75 MM               |                                                                                      |
| CUT-OUT             | : Ø 65 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 2C</b>                                                                   |
| WATTS               | : 18W                        |    |
| FINISH & MATERIAL   | : ROSE GOLD & ALUMINIUM      |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 75 MM               |                                                                                      |
| CUT-OUT             | : Ø 65 MM                    |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE CODE 2D</b>                                                                   |
| WATTS               | : 7W                         |   |
| FINISH & MATERIAL   | : WHITE & WHITE + ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 62 X H 43 MM               |                                                                                      |
| CUT-OUT             | : Ø 54 MM                    |                                                                                      |
| LUMENS              | : 700Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE META 1A</b>                                                                   |
| WATTS               | : 7W                         |  |
| FINISH & MATERIAL   | : BLACK & BLACK + ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 62 X H 43 MM               |                                                                                      |
| CUT-OUT             | : Ø 54 MM                    |                                                                                      |
| LUMENS              | : 700Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE META 1B</b>                                                                   |
| WATTS               | : 12W                        |  |
| FINISH & MATERIAL   | : WHITE & WHITE + ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 82 X H 45 MM               |                                                                                      |
| CUT-OUT             | : Ø 74 MM                    |                                                                                      |
| LUMENS              | : 1200Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE META 2A</b>                                                                   |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : BLACK & BLACK + ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 82 X H 45 MM               |                                                                                      |
| CUT-OUT             | : Ø 74 MM                    |                                                                                      |
| LUMENS              | : 1200Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE META 2B</b>                                                                   |
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM     |                                                                                      |
| REFLECTOR           | : SHINE BLACK                |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 73 MM               |                                                                                      |
| CUT-OUT             | : Ø 64 MM                    |                                                                                      |
| LUMENS              | : 1200Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE VIITOR 1A</b>                                                                 |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM     |                                                                                      |
| REFLECTOR           | : SHINE BLACK                |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 72 X H 73 MM               |                                                                                      |
| CUT-OUT             | : Ø 64 MM                    |                                                                                      |
| LUMENS              | : 1200Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE VIITOR 1B</b>                                                                 |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM     |                                                                                      |
| REFLECTOR           | : SHINE BLACK                |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 83 X H 84 MM               |                                                                                      |
| CUT-OUT             | : Ø 75 MM                    |                                                                                      |
| LUMENS              | : 1800Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE VIITOR 2A</b>                                                                 |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM     |                                                                                      |
| REFLECTOR           | : SHINE BLACK                |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 83 X H 84 MM               |                                                                                      |
| CUT-OUT             | : Ø 75 MM                    |                                                                                      |
| LUMENS              | : 1800Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE VIITOR 2B</b>                                                                 |

| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                              |
|---------------------|----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                             |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM         |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| CRI                 | : ≥ 85                           |                                                                                      |
| DIMENSION           | : 70 X H 53 MM                   |                                                                                      |
| CUT-OUT             | : Ø 60 MM                        |                                                                                      |
| LUMENS              | : 630Lm                          |                                                                                      |
| POWERED BY          | : BRIDGELUX                      | <b>PRE COIN 1</b>                                                                    |
| WATTS               | : 12W                            |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM         |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| CRI                 | : ≥ 85                           |                                                                                      |
| DIMENSION           | : 92 X H 75 MM                   |                                                                                      |
| CUT-OUT             | : Ø 75 MM                        |                                                                                      |
| LUMENS              | : 1080Lm                         |                                                                                      |
| POWERED BY          | : BRIDGELUX                      | <b>PRE COIN 2</b>                                                                    |
| WATTS               | : 18W                            |   |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM         |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| CRI                 | : ≥ 85                           |                                                                                      |
| DIMENSION           | : 110 X H 76 MM                  |                                                                                      |
| CUT-OUT             | : Ø 80 MM                        |                                                                                      |
| LUMENS              | : 1620Lm                         |                                                                                      |
| POWERED BY          | : BRIDGELUX                      | <b>PRE COIN 3</b>                                                                    |
| WATTS               | : 3W                             |  |
| FINISH & MATERIAL   | : MATT WHITE + BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                      |
| CRI                 | : ≥ 85                           |                                                                                      |
| DIMENSION           | : 67 x 32 x H 33 MM              |                                                                                      |
| CUT-OUT             | : Ø 62 x 25 MM                   |                                                                                      |
| LUMENS              | : 300 Lm                         |                                                                                      |
| POWERED BY          | : BRUDGELUX                      | <b>PRE FILA 1A</b>                                                                   |
| WATTS               | : 3W                             |  |
| FINISH & MATERIAL   | : MATT BLACK + BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K                   |                                                                                      |
| CRI                 | : ≥ 85                           |                                                                                      |
| DIMENSION           | : 67 x 32 x H 33 MM              |                                                                                      |
| CUT-OUT             | : Ø 62 x 25 MM                   |                                                                                      |
| LUMENS              | : 300 Lm                         |                                                                                      |
| POWERED BY          | : BRUDGELUX                      | <b>PRE FILA 1B</b>                                                                   |

| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                              |
|---------------------|----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 6W                             |    |
| FINISH & MATERIAL   | : MATT WHITE + BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                            |                                                                                      |
| CCT(K)              | : 3000K,4000K                    |                                                                                      |
| CRI                 | : ≥85                            |                                                                                      |
| DIMENSION           | : 121 x 32 x H 35 MM             |                                                                                      |
| CUT-OUT             | : Ø 113 x 25 MM                  |                                                                                      |
| LUMENS              | : 600 Lm                         |                                                                                      |
| POWERED BY          | : BRUDGELUX                      | <b>PRE FILA 2A</b>                                                                   |
| WATTS               | : 6W                             |    |
| FINISH & MATERIAL   | : MATT BLACK + BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 24°                            |                                                                                      |
| CCT(K)              | : 3000K,4000K                    |                                                                                      |
| CRI                 | : ≥85                            |                                                                                      |
| DIMENSION           | : 121 x 32 x H 35 MM             |                                                                                      |
| CUT-OUT             | : Ø 113 x 25 MM                  |                                                                                      |
| LUMENS              | : 600 Lm                         |                                                                                      |
| POWERED BY          | : BRUDGELUX                      | <b>PRE FILA 2B</b>                                                                   |
| WATTS               | : 5 X 2W                         |   |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| DIMENSION           | : 146 X H 44 MM                  |                                                                                      |
| CUT-OUT             | : 137 X 35 MM                    |                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT              |                                                                                      |
|                     |                                  | <b>SNIP TAGO 1A / 1B</b>                                                             |
| WATTS               | : 10 X 2W                        |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| DIMENSION           | : 281 X H 44 MM                  |                                                                                      |
| CUT-OUT             | : 271 X 35 MM                    |                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT              |                                                                                      |
|                     |                                  | <b>SNIP TAGO 2A / 2B</b>                                                             |
| WATTS               | : 1 X 4W                         |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 36°                            |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K     |                                                                                      |
| DIMENSION           | : 51 X H 51 MM                   |                                                                                      |
| CUT-OUT             | : 41 X 41 MM                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                      |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT              |                                                                                      |
|                     |                                  | <b>SNIP RAGA 1A / 1B</b>                                                             |

| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                              |
|---------------------|---------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 3 X 4W                        |    |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K    |                                                                                      |
| DIMENSION           | : 128 X H 50 MM                 |                                                                                      |
| CUT-OUT             | : 118 X 42 MM                   |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX : BAG or EQUIVALENT |                                                                                      |
|                     |                                 | <b>SNIP RAGA 2A / 2B</b>                                                             |
| WATTS               | : 5 X 4W                        |    |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 36°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K    |                                                                                      |
| DIMENSION           | : 205 x 50 x H 55 MM            |                                                                                      |
| CUT-OUT             | : 195 x 42 MM                   |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX : BAG or EQUIVALENT |                                                                                      |
|                     |                                 | <b>SNIP RAGA 3A / 3B</b>                                                             |
| WATTS               | : 1 X 12W = 12W                 |   |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE             |                                                                                      |
| BEAM ANGLE          | : 24°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K                  |                                                                                      |
| CRI                 | : ≥90                           |                                                                                      |
| DIMENSION           | : 90 x 100                      |                                                                                      |
| CUT-OUT             | : Ø 75 MM                       |                                                                                      |
| LUMENS              | : 1320 Lm                       |                                                                                      |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
|                     |                                 | <b>PRE DOMO 1A</b>                                                                   |
| WATTS               | : 1 X 12W = 12W                 |  |
| FINISH & MATERIAL   | : ALUMINIUM + BLACK             |                                                                                      |
| BEAM ANGLE          | : 24°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K                  |                                                                                      |
| CRI                 | : ≥90                           |                                                                                      |
| DIMENSION           | : 90 x 100                      |                                                                                      |
| CUT-OUT             | : Ø 75 MM                       |                                                                                      |
| LUMENS              | : 1320 Lm                       |                                                                                      |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
|                     |                                 | <b>PRE DOMO 1B</b>                                                                   |
| WATTS               | : 2 X 12W = 24W                 |  |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE             |                                                                                      |
| BEAM ANGLE          | : 24°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K                  |                                                                                      |
| CRI                 | : ≥90                           |                                                                                      |
| DIMENSION           | : 170 x 90 x 100                |                                                                                      |
| CUT-OUT             | : Ø 155 x 75                    |                                                                                      |
| LUMENS              | : 2640Lm                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
|                     |                                 | <b>PRE DOMO 2A</b>                                                                   |



| PRODUCT DESCRIPTION |                           | PRODUCT                                                                              |
|---------------------|---------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 12W = 24W           |    |
| FINISH & MATERIAL   | : ALUMINIUM + BLACK       |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K,4000K             |                                                                                      |
| CRI                 | : ≥90                     |                                                                                      |
| DIMENSION           | : 170 x 90 x 100          |                                                                                      |
| CUT-OUT             | : Ø 155 x 75              |                                                                                      |
| LUMENS              | : 2640Lm                  |                                                                                      |
| POWERED BY          | : BRIDGELUX               | <b>PRE DOMO 2B</b>                                                                   |
| WATTS               | : 12W                     |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K |                                                                                      |
| CRI                 | : ≥80                     |                                                                                      |
| DIMENSION           | : 90 X H 95 MM            |                                                                                      |
| CUT-OUT             | : 83 MM                   |                                                                                      |
| LUMENS              | : 1080LM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX               | <b>PRE SPOUT 1A</b>                                                                  |
| WATTS               | : 12W                     |   |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K |                                                                                      |
| CRI                 | : ≥80                     |                                                                                      |
| DIMENSION           | : 90 X H 95 MM            |                                                                                      |
| CUT-OUT             | : 83 MM                   |                                                                                      |
| LUMENS              | : 1080LM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX               | <b>PRE SPOUT 1B</b>                                                                  |
| WATTS               | : 2X 12W = 24W            |  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K |                                                                                      |
| CRI                 | : ≥80                     |                                                                                      |
| DIMENSION           | : 175 X 95 X H 95 MM      |                                                                                      |
| CUT-OUT             | : L167 X W 82 MM          |                                                                                      |
| LUMENS              | : 2160LM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX               | <b>PRE SPOUT 2A</b>                                                                  |
| WATTS               | : 2X 12W = 24W            |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM  |                                                                                      |
| BEAM ANGLE          | : 24°                     |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K |                                                                                      |
| CRI                 | : ≥80                     |                                                                                      |
| DIMENSION           | : 175 X 95 X H 95 MM      |                                                                                      |
| CUT-OUT             | : L167 X W 82 MM          |                                                                                      |
| LUMENS              | : 2160LM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX               | <b>PRE SPOUT 2B</b>                                                                  |

| PRODUCT DESCRIPTION |                            | PRODUCT                                                                              |
|---------------------|----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                      |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 40°                      |                                                                                      |
| CCT(K)              | : 3000K,4000K              |                                                                                      |
| CRI                 | : ≥85                      |                                                                                      |
| DIMENSION           | : 68 X H 140 MM            |                                                                                      |
| CUT-OUT             | : 60 MM                    |                                                                                      |
| LUMENS              | : 1080LM                   |                                                                                      |
| POWERED BY          | : BRIDGELUX                | <b>PRE AMBRE 1A</b>                                                                  |
| WATTS               | : 12W                      |    |
| FINISH & MATERIAL   | : NICKEL BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 40°                      |                                                                                      |
| CCT(K)              | : 3000K,4000K              |                                                                                      |
| CRI                 | : ≥85                      |                                                                                      |
| DIMENSION           | : 68 X H 140 MM            |                                                                                      |
| CUT-OUT             | : 60 MM                    |                                                                                      |
| LUMENS              | : 1080LM                   |                                                                                      |
| POWERED BY          | : BRIDGELUX                | <b>PRE AMBRE 1B</b>                                                                  |
| WATTS               | : 12W                      |   |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM   |                                                                                      |
| BEAM ANGLE          | : 40°                      |                                                                                      |
| CCT(K)              | : 3000K,4000K              |                                                                                      |
| CRI                 | : ≥85                      |                                                                                      |
| DIMENSION           | : 68 X H 140 MM            |                                                                                      |
| LUMENS              | : 1080LM                   |                                                                                      |
| POWERED BY          | : BRIDGELUX                |                                                                                      |
|                     |                            | <b>PRE AMBRETO 1A</b>                                                                |
| WATTS               | : 12W                      |  |
| FINISH & MATERIAL   | : NICKEL BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 40°                      |                                                                                      |
| CCT(K)              | : 3000K,4000K              |                                                                                      |
| CRI                 | : ≥85                      |                                                                                      |
| DIMENSION           | : 68 X H 140 MM            |                                                                                      |
| LUMENS              | : 1080LM                   |                                                                                      |
| POWERED BY          | : BRIDGELUX                |                                                                                      |
|                     |                            | <b>PRE AMBRETO 1B</b>                                                                |
| WATTS               | : 7W                       |  |
| FINISH & MATERIAL   | : SAND WHITE               |                                                                                      |
| BEAM ANGLE          | : 60°                      |                                                                                      |
| CCT(K)              | : 3000K, 4000K             |                                                                                      |
| CRI                 | : ≥85                      |                                                                                      |
| DIMENSION           | : Ø 70 x H 77 MM           |                                                                                      |
| CUT-OUT             | : 58 MM                    |                                                                                      |
| LUMENS              | : 630Lm                    |                                                                                      |
| POWERED BY          | : BRIDGELUX                |                                                                                      |
|                     |                            | <b>PRE SWING 1A</b>                                                                  |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : SAND WHITE                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                      |
| CUT-OUT             | : 60 MM                      |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWING 2A</b>                                                                  |
| WATTS               | : 7W                         |    |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 70 x H 77 MM             |                                                                                      |
| CUT-OUT             | : 58 MM                      |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWING 1B</b>                                                                  |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                      |
| CUT-OUT             | : 60 MM                      |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWING 2B</b>                                                                  |
| WATTS               | : 7W                         |  |
| FINISH & MATERIAL   | : GOLD + BLACK               |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 70 x H 77 MM             |                                                                                      |
| CUT-OUT             | : 58 MM                      |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWING 1C</b>                                                                  |
| WATTS               | : 12W                        |  |
| FINISH & MATERIAL   | : GOLD + BLACK               |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                      |
| CUT-OUT             | : 60 MM                      |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWING 2C</b>                                                                  |

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                         |    |
| FINISH & MATERIAL   | : SAND WHITE                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 70 x H 87 MM             |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWINGER 1A</b>                                                                |
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : SAND WHITE                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 85 x H 106 MM            |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWINGER 2A</b>                                                                |
| WATTS               | : 7W                         |   |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 70 x H 87 MM             |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWINGER 1B</b>                                                                |
| WATTS               | : 12W                        |  |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 85 x H 106 MM            |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWINGER 2B</b>                                                                |
| WATTS               | : 7W                         |  |
| FINISH & MATERIAL   | : GOLD + BLACK               |                                                                                      |
| BEAM ANGLE          | : 60°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥85                        |                                                                                      |
| DIMENSION           | : Ø 70 x H 87 MM             |                                                                                      |
| LUMENS              | : 630Lm                      |                                                                                      |
| POWERED BY          | : BRIDGELUX                  | <b>PRE SWINGER 1C</b>                                                                |

| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                              |
|---------------------|---------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                           |    |
| FINISH & MATERIAL   | : GOLD + BLACK                  |                                                                                      |
| BEAM ANGLE          | : 60°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K    |                                                                                      |
| CRI                 | : ≥85                           |                                                                                      |
| DIMENSION           | : Ø 85 x H 106 MM               |                                                                                      |
| LUMENS              | : 1080Lm                        |    |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
| WATT                | : 12W                           |                                                                                      |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM             |                                                                                      |
| CCT(K)              | : 3000K , 4000K , 5000K , 6000K |                                                                                      |
| CRI                 | : ≥80                           |                                                                                      |
| BEAM ANGLE          | : 24°                           |                                                                                      |
| DIMENSION           | : 85 X H 71 MM                  |   |
| CUT-OUT             | : Ø 78 MM                       |                                                                                      |
| LUMEN               | : 1350Lm                        |                                                                                      |
| ADJUSTABLE ANGLE    | : LAMP HEAD 0 ~ 80° / 340°      |                                                                                      |
| DRIVER              | : PHILIPS OR EQUIVALENT         |                                                                                      |
| POWERED BY          | : CREE                          |                                                                                      |
| WATT                | : 12W                           |  |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM             |                                                                                      |
| CCT(K)              | : 3000K , 4000K , 5000K , 6000K |                                                                                      |
| CRI                 | : ≥80                           |                                                                                      |
| BEAM ANGLE          | : 24°                           |                                                                                      |
| DIMENSION           | : 74 X H 88 MM                  |                                                                                      |
| LUMEN               | : 1350Lm                        |  |
| ADJUSTABLE ANGLE    | : LAMP HEAD 0 ~ 80° / 340°      |                                                                                      |
| DRIVER              | : PHILIPS OR EQUIVALENT         |                                                                                      |
| POWERED BY          | : CREE                          |                                                                                      |
| WATTS               | : 7W                            |                                                                                      |
| FINISH              | : MATT WHITE + BLACK            |                                                                                      |
| MATERIAL            | : ALUMINIUM                     |  |
| BEAM ANGLE          | : 36°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K                  |                                                                                      |
| CRI                 | : ≥85                           |                                                                                      |
| DIMENSION           | : 55 X H 60 MM                  |                                                                                      |
| LUMENS              | : 700Lm                         |                                                                                      |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
| WATTS               | : 12W                           |  |
| FINISH              | : MATT WHITE + BLACK            |                                                                                      |
| MATERIAL            | : ALUMINIUM                     |                                                                                      |
| BEAM ANGLE          | : 36°                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K                  |                                                                                      |
| CRI                 | : ≥85                           |                                                                                      |
| DIMENSION           | : 68 X H 68 MM                  |                                                                                      |
| LUMENS              | : 1200Lm                        |  |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                     |                                                                                      |



**PRE SWINGER 2C**

**PRO SCREW RD NEW**


**PRO SCREW DRIVER MINI**


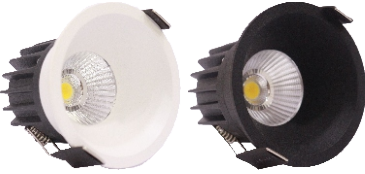
**PRE CADMO 1A**

**PRE CADMO 2A**

| PRODUCT DESCRIPTION |                                                 | PRODUCT                                                                              |
|---------------------|-------------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                                            |    |
| FINISH              | : MATT WHITE & MATT BLACK                       |                                                                                      |
| MATERIAL            | : ALUMINIUM                                     |                                                                                      |
| REFLECTOR           | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥85                                           |                                                                                      |
| DIMENSION           | : 54 X H 75 MM                                  |                                                                                      |
| LUMENS              | : 630Lm                                         |                                                                                      |
| POWERED BY          | : BRIDGELUX                                     |                                                                                      |
|                     |                                                 | <b>PRE BASILIO 1A/1B</b>                                                             |
| WATTS               | : 12W                                           |    |
| FINISH              | : MATT WHITE & MATT BLACK                       |                                                                                      |
| MATERIAL            | : ALUMINIUM                                     |                                                                                      |
| REFLECTOR           | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥85                                           |                                                                                      |
| DIMENSION           | : 76 X H 100 MM                                 |                                                                                      |
| LUMENS              | : 1080Lm                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                     |                                                                                      |
|                     |                                                 | <b>PRE BASILIO 2A/2B</b>                                                             |
| WATTS               | : 18W                                           |   |
| FINISH              | : MATT WHITE & MATT BLACK                       |                                                                                      |
| MATERIAL            | : ALUMINIUM                                     |                                                                                      |
| REFLECTOR           | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥85                                           |                                                                                      |
| DIMENSION           | : 94 X H 120 MM                                 |                                                                                      |
| LUMENS              | : 1620Lm                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                     |                                                                                      |
|                     |                                                 | <b>PRE BASILIO 3A/3B</b>                                                             |
| WATTS               | : 7W                                            |  |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE                             |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥90                                           |                                                                                      |
| DIMENSION           | : 50 x H 70 MM                                  |                                                                                      |
| CUT-OUT             | : Ø 75 MM                                       |                                                                                      |
| LUMENS              | : 1320 Lm                                       |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
|                     |                                                 | <b>PRE ALPINE 1A / 1B</b>                                                            |
| WATTS               | : 12W                                           |  |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE                             |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥90                                           |                                                                                      |
| DIMENSION           | : 70 x H 75 MM                                  |                                                                                      |
| CUT-OUT             | : Ø 75 MM                                       |                                                                                      |
| LUMENS              | : 1320 Lm                                       |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
|                     |                                                 | <b>PRE ALPINE 2A / 2B</b>                                                            |



| PRODUCT DESCRIPTION |                              | PRODUCT                                                                              |
|---------------------|------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 20W                        |    |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE          |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥90                        |                                                                                      |
| DIMENSION           | : 76 x H 95 MM               |                                                                                      |
| CUT-OUT             | : Ø 75 MM                    |                                                                                      |
| LUMENS              | : 1320 Lm                    |                                                                                      |
| POWERED BY          | : CREE                       | <b>PRE ALPINE 3A / 3B</b>                                                            |
| WATTS               | : 12W                        |    |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 113 MM              |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  |                                                                                      |
|                     |                              | <b>PRE LOOP EX 1A</b>                                                                |
| WATTS               | : 12W                        |   |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 60 X H 113 MM              |                                                                                      |
| LUMENS              | : 1080Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  |                                                                                      |
|                     |                              | <b>PRE LOOP EX 1B</b>                                                                |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 80 X H 134 MM              |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  |                                                                                      |
|                     |                              | <b>PRE LOOP EX 2A</b>                                                                |
| WATTS               | : 18W                        |  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM     |                                                                                      |
| BEAM ANGLE          | : 36°                        |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                      |
| CRI                 | : ≥ 85                       |                                                                                      |
| DIMENSION           | : 80 X H 134 MM              |                                                                                      |
| LUMENS              | : 1620Lm                     |                                                                                      |
| POWERED BY          | : BRIDGELUX                  |                                                                                      |
|                     |                              | <b>PRE LOOP EX 2B</b>                                                                |

| PRODUCT DESCRIPTION |                                | PRODUCT                                                                              |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 30W                          |    |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K , 6000K         |                                                                                      |
| CRI                 | : ≥ 85                         |                                                                                      |
| DIMENSION           | : 95 X H 140 MM                |                                                                                      |
| LUMENS              | : 2700Lm                       |    |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| WATTS               | : 30W                          |                                                                                      |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K , 6000K         |                                                                                      |
| CRI                 | : ≥ 85                         |                                                                                      |
| DIMENSION           | : 95 X H 140 MM                |                                                                                      |
| LUMENS              | : 2700Lm                       |  |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT            |                                                                                      |
| WATTS               | : 7W                           |                                                                                      |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 70 X H 65 MM                 |  |
| CUT-OUT             | : 60 MM                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT            |                                                                                      |
| WATTS               | : 12W                          |                                                                                      |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |  |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 85 X H 75 MM                 |                                                                                      |
| CUT-OUT             | : 76 MM                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT            |                                                                                      |

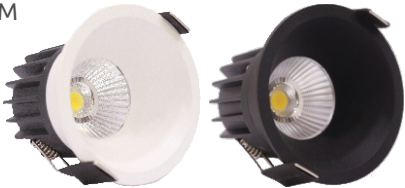
**PRE LOOP EX 3A**

**PRE LOOP EX 3B**

**SNIP ECOB 1A / 1B**

**SNIP ECOB 2A / 2B**

**SNIP ECOB 3A / 3B**

| PRODUCT DESCRIPTION |                                | PRODUCT                                                                              |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 18W                          |    |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 95 X H 100 MM                |                                                                                      |
| CUT-OUT             | : 86 MM                        |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX                    |                                                                                      |
|                     | : BAG or EQUIVALENT            | <b>SNIP ECOB 4A / 4B</b>                                                             |
| WATTS               | : 7W                           |    |
| FINISH & MATERIAL   | : SAND WHITE & ALUMINIUM       |                                                                                      |
| BEAM ANGLE          | : 120°                         |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                      |
| DIMENSION           | : 83 X 83 X H 83 MM            |                                                                                      |
| CUT-OUT             | : 77 X 77 MM                   |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX                    |                                                                                      |
|                     | : BAG or EQUIVALENT            | <b>SNIP EMONDO 1A / 1B</b>                                                           |
| WATTS               | : 12W                          |   |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 83 X 83 X H 83 MM            |                                                                                      |
| CUT-OUT             | : 77 X 77 MM                   |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX                    |                                                                                      |
|                     | : BAG or EQUIVALENT            | <b>SNIP EMONDO 2A / 2B</b>                                                           |
| WATTS               | : 15W                          |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 83 X 83 X H 83 MM            |                                                                                      |
| CUT-OUT             | : 77 X 77 MM                   |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX                    |                                                                                      |
|                     | : BAG or EQUIVALENT            | <b>SNIP EMONDO 3A / 3B</b>                                                           |
| WATTS               | : 2 X 7W                       |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 162 X 83 X H 83 MM           |                                                                                      |
| CUT-OUT             | : 155 X 77 MM                  |                                                                                      |
| POWERED BY DRIVER   | : BRIDGELUX                    |                                                                                      |
|                     | : BAG or EQUIVALENT            | <b>SNIP EMONDO TWIN 1A / 1B</b>                                                      |

| PRODUCT DESCRIPTION |                                | PRODUCT                                                                              |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 12W                      |    |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 162 X 83 X H 83 MM           |                                                                                      |
| CUT-OUT             | : 155 X 77 MM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT            |                                                                                      |
|                     |                                | <b>SNIP EMONDO TWIN 2A / 2B</b>                                                      |
| WATTS               | : 2 X 15W                      |    |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 36°                          |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K   |                                                                                      |
| DIMENSION           | : 162 X 83 X H 83 MM           |                                                                                      |
| CUT-OUT             | : 155 X 77 MM                  |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
| DRIVER              | : BAG or EQUIVALENT            |                                                                                      |
|                     |                                | <b>SNIP EMONDO TWIN 3A / 3B</b>                                                      |
| WATTS               | : 15W                          |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                         |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                      |
| CRI                 | : ≥ 80                         |                                                                                      |
| DIMENSION           | : 120 X H 36 MM                |                                                                                      |
| LUMENS              | : 1350Lm                       |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
|                     |                                | <b>PRE WANO 1A / 1B</b>                                                              |
| WATTS               | : 22W                          |  |
| FINISH & MATERIAL   | : SAND WHITE/BLACK & ALUMINIUM |                                                                                      |
| BEAM ANGLE          | : 120°                         |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 6000K          |                                                                                      |
| CRI                 | : ≥ 80                         |                                                                                      |
| DIMENSION           | : 175 X H 36 MM                |                                                                                      |
| LUMENS              | : 1980Lm                       |                                                                                      |
| POWERED BY          | : BRIDGELUX                    |                                                                                      |
|                     |                                | <b>PRE WANO 2A / 2B</b>                                                              |



# SNIP LED STRIPS

| ITEM CODE              | WATT / METER | CCT | VOLTAGE | PCB WIDTH | PCB             |
|------------------------|--------------|-----|---------|-----------|-----------------|
| <b>60 LED / METER</b>  |              |     |         |           |                 |
| SLS 001                | 5W           | 3K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 002                | 5W           | 4K  | 12V     | 8MM       | DOUBLE PCB PET  |
| <b>120 LED / METER</b> |              |     |         |           |                 |
| SLS 003                | 12W          | 3K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 004                | 12W          | 4K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 005                | 12W          | 6K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 006                | 14W          | 3K  | 24V     | 8MM       | DOUBLE PCB H PI |
| SLS 007                | 14W          | 4K  | 24V     | 8MM       | DOUBLE PCB H PI |
| SLS 008                | 14W          | 3K  | 12V     | 8MM       | DOUBLE PCB H PI |
| SLS 009                | 14W          | 4K  | 12V     | 8MM       | DOUBLE PCB H PI |
| SLS 019                | 12W          | 3K  | 12V     | 5MM       | DOUBLE PCB H PI |
| SLS 020                | 12W          | 4K  | 12V     | 5MM       | DOUBLE PCB H PI |
| <b>168 LED / METER</b> |              |     |         |           |                 |
| SLS 010                | 17W          | 3K  | 12V     | 10MM      | 3Z PCB          |
| SLS 011                | 17W          | 4K  | 12V     | 10MM      | 3Z PCB          |
| SLS 012                | 17W          | 6K  | 12V     | 10MM      | 3Z PCB          |
| SLS 013                | 17W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 014                | 17W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| SLS 023                | 17W          | 3K  | 12V     | 5MM       | DOUBLE PCB H PI |
| SLS 024                | 17W          | 4K  | 12V     | 5MM       | DOUBLE PCB H PI |
| <b>192 LED / METER</b> |              |     |         |           |                 |
| SLS 015                | 18W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 016                | 18W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| <b>240 LED / METER</b> |              |     |         |           |                 |
| SLS 017                | 22W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 018                | 22W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| SLS 021                | 22W          | 3K  | 12V     | 10MM      | 3Z PCB          |
| SLS 022                | 22W          | 4K  | 12V     | 10MM      | 3Z PCB          |

## SNIP SMPS DRIVER RANGE

| SR. NO. | CODE         | DESCRIPTION | OUTPUT WATTAGE | DIMENSION L x W x H (mm) |
|---------|--------------|-------------|----------------|--------------------------|
| 1       | SLD 12V 2A   | 12V / 2A    | 24W            | 75 x 35 x 26             |
| 2       | SLD 12V 5A   | 12V / 5A    | 60W            | 146 x 35 x 26            |
| 3       | SLD 12V 8A   | 12V / 8A    | 96W            | 155 x 38 x 33            |
| 4       | SLD 12V 10A  | 12V / 10A   | 120W           | 192 x 38 x 33            |
| 5       | SLD 12V 12A  | 12V / 12A   | 144W           | 175 x 48 x 32            |
| 6       | SLD 12V 20A  | 12V / 20A   | 240W           | 227 x 48 x 32            |
| 7       | SLD 24V 2.5A | 24V / 2.5A  | 60W            | 122 x 35 x 26            |
| 8       | SLD 24V 5A   | 24V / 5A    | 120W           | 192 x 38 x 33            |
| 9       | SLD 24V 10A  | 24V / 10A   | 240W           | 227 x 48 x 32            |





TREEBO




COBRA FLEX



DRIVE OUTDOOR



## COBRA FLEX



CE RoHS IP66

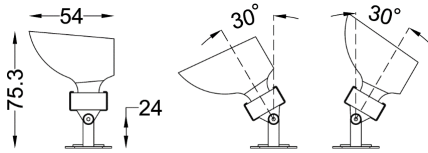
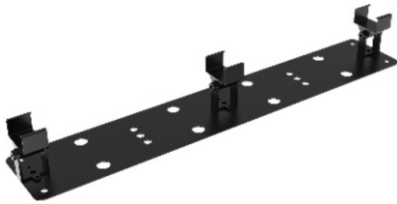


**WATTS** : 11.25W  
**MATERIAL** : PC + TPU + PMMA  
**CCT(K)** : 3000K  
**OPTICS** : 15° x 45°  
**INPUT** : DC24V (Driver not Included)  
**LUMENS** : 930Lm PER FEET  
**LENGTH** : 310 MM


**WATTS** : 22.5W  
**MATERIAL** : PC + TPU + PMMA  
**CCT(K)** : 3000K  
**OPTICS** : 15° x 45°  
**INPUT** : DC24V (Driver not Included)  
**LUMENS** : 930Lm PER FEET  
**LENGTH** : 600 MM

## MOUNTING ACCESSORIES

### TREE MOUNTING



### WALL MOUNTING



## CONNECTING ACCESSORIES

### POWER LEAD CABLE 300



M-12-2 PIN  
L-300 MM

### POWER LEAD CABLE 1800



M-12-2 PIN  
L-1800 MM

### JUNCTION CABLE



M-12-2 PIN  
L-300 MM

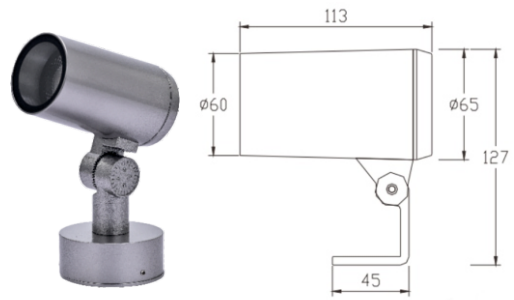
## TREEBO

|                |                         |
|----------------|-------------------------|
| PRODUCT TYPE   | : TREEBELT              |
| WATTS          | : 15W                   |
| LED SOURCE     | : SAN AN                |
| DRIVER         | : DONE                  |
| BEAM ANGLE     | : 10°/30°/60°           |
| MATERIAL       | : ALUMINIUM DIE CASTING |
| HOUSING COLOUR | : REGULAR               |
| IP RATING      | : IP66                  |
| LIFESPAN       | : 50000 HOURS           |



## BUSHO

|                |                         |
|----------------|-------------------------|
| PRODUCT TYPE   | : BASE TYPE             |
| WATTS          | : 15W                   |
| LED SOURCE     | : SAN AN                |
| DRIVER         | : DONE                  |
| BEAM ANGLE     | : 10°/30°/60°           |
| MATERIAL       | : ALUMINIUM DIE CASTING |
| HOUSING COLOUR | : REGULAR               |
| IP RATING      | : IP66                  |
| LIFESPAN       | : 50000 HOURS           |



## FOCO

|                |                         |
|----------------|-------------------------|
| PRODUCT TYPE   | : SPIKE TYPE            |
| WATTS          | : 15W                   |
| LED SOURCE     | : SAN AN                |
| DRIVER         | : DONE                  |
| BEAM ANGLE     | : 10°/30°/60°           |
| MATERIAL       | : ALUMINIUM DIE CASTING |
| HOUSING COLOUR | : REGULAR               |
| IP RATING      | : IP66                  |
| LIFESPAN       | : 50000 HOURS           |



DIMENSION ON REQUEST

### BRUN PLAFOND 1




|                   |                     |
|-------------------|---------------------|
| WATTS             | : 8W                |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K)            | : 3000K             |
| OPTICS            | : 48°               |
| LUMENS            | : 700Lm             |
| IP RATING         | : IP54              |
| UGR               | : <16               |
| DIMENSION         | : Ø 110 X H 60MM    |
| LAMP TYPE         | : COB               |
| POWERED BY        | : CREE              |

### BRUN SVELTO 1



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 120°                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 228 X H 406 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

### BRUN SVELTO 2



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 120°                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 145 X H 360 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

### BRUN SVELTO 3



|                   |                           |
|-------------------|---------------------------|
| WATTS             | : 12W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM       |
| CCT(K)            | : 3000K                   |
| OPTICS            | : 120°                    |
| LUMENS            | : 1440Lm                  |
| IP RATING         | : IP54                    |
| UGR               | : <18                     |
| DIMENSION         | : Ø 145 x 145 X H 1200 MM |
| LAMP TYPE         | : SMD                     |
| POWERED BY        | : EDISION                 |

### BRUN SVELTO 4




WATTS : 12W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 1440Lm  
IP RATING : IP54  
UGR : <18  
DIMENSION : Ø 145 X 145 X H 400 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN SVELTO 5



WATTS : 12W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 1440Lm  
IP RATING : IP54  
UGR : <18  
DIMENSION : Ø 145 X 145 X H 600 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN KINAKO 1



WATTS : 6W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 580Lm  
IP RATING : IP65  
UGR : <18  
DIMENSION : Ø 100 X 100 X H 108 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN KINAKO 2



WATTS : 6W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 580Lm  
IP RATING : IP65  
UGR : <18  
DIMENSION : Ø 100 X 100 X H 350 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN KINAKO 3



WATTS : 6W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 1440Lm  
IP RATING : IP54  
UGR : <18  
DIMENSION : Ø 100 X 100 X H 550 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN LEGER 1



WATTS : 12W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 180°  
LUMENS : 1200Lm  
IP RATING : IP65  
UGR : <22  
DIMENSION : Ø 180 X 80 X H 426 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN LEGER 2



WATTS : 16W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 180°  
LUMENS : 1550Lm  
IP RATING : IP65  
UGR : <22  
DIMENSION : Ø 180 X 80 X H 626 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN BORNE 1



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 680Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 120 X 135 X H 230 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON



### BRUN BORNE 2



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 860Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 125 X 158 X H 206 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN BORNE 3



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 680Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 120 X 330 X H 800 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN BORNE 4



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 680Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 120 X 330 X H 1500 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN FIERO



WATTS : 5W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 580Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 105 X 240 X H 600 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN CLAIR



WATTS : 8.5W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 180°  
LUMENS : 800Lm  
IP RATING : IP65  
UGR : <22  
DIMENSION : Ø 400 X H 435 MM  
LAMP TYPE : SMD  
POWERED BY : EDISON

### BRUN LUMINA 1



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 720Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 60 X 60 X H 300 MM  
LAMP TYPE : COB  
POWERED BY : CREE

### BRUN LUMINA 2



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 720Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 60 X 60 X H 600 MM  
LAMP TYPE : COB  
POWERED BY : CREE

### BRUN LUMINA 3



WATTS : 8W  
FINISH & MATERIAL : BROWN & ALUMINIUM  
CCT(K) : 3000K  
OPTICS : 120°  
LUMENS : 720Lm  
IP RATING : IP65  
UGR : 18  
DIMENSION : Ø 60 X 80 X H 250 MM  
LAMP TYPE : COB  
POWERED BY : CREE

### BRUN LUMIERE 1



|                   |                       |
|-------------------|-----------------------|
| WATTS             | : 6W                  |
| ADJUSTABILITY     | : 250°                |
| FINISH & MATERIAL | : BROWN & ALUMINIUM   |
| CCT(K)            | : 3000K               |
| OPTICS            | : 35°                 |
| LUMENS            | : 550Lm               |
| IP RATING         | : IP65                |
| UGR               | : <16                 |
| DIMENSION         | : Ø 95 X 140 X 180 MM |
| LAMP TYPE         | : COB                 |
| POWERED BY        | : CREE                |

### BRUN LUMIERE 2



|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 8W                    |
| ADJUSTABILITY     | : 350°                  |
| FINISH & MATERIAL | : BROWN & ALUMINIUM     |
| CCT(K)            | : 3000K                 |
| OPTICS            | : 48°                   |
| LUMENS            | : 800Lm                 |
| IP RATING         | : IP65                  |
| UGR               | : <16                   |
| DIMENSION         | : Ø 280 X 85 X H 620 MM |
| LAMP TYPE         | : SMD                   |
| POWERED BY        | : EDISON                |


### BRUN LUMIERE 3




|                   |                        |
|-------------------|------------------------|
| WATTS             | : 8W                   |
| ADJUSTABILITY     | : 350°                 |
| FINISH & MATERIAL | : BROWN & ALUMINIUM    |
| CCT(K)            | : 3000K                |
| OPTICS            | : 48°                  |
| LUMENS            | : 800Lm                |
| IP RATING         | : IP65                 |
| UGR               | : <16                  |
| DIMENSION         | : Ø 85 X 30 X H 800 MM |
| LAMP TYPE         | : SMD                  |
| POWERED BY        | : EDISON               |

# PRIME OUTDOOR

| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                                                             |
|---------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 8W ( OUTDOOR BULKHEAD)        |  <p><b>PRO ELEGANT SMALL</b></p>  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-190 MM X D-75 MM          |                                                                                                                     |
| LUMENS              | : 520Lm                         |                                                                                                                     |
| IP RATING           | : IP54                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |                                                                                                                     |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 13W ( OUTDOOR BULKHEAD)       |  <p><b>PRO ELEGANT MEDIUM</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-245 MM X D-75 MM          |                                                                                                                     |
| LUMENS              | : 970Lm                         |                                                                                                                     |
| IP RATING           | : IP54                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |                                                                                                                     |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 18W ( OUTDOOR BULKHEAD)       |  <p><b>PRO ELEGANT BIG</b></p>   |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-310 MM X D-75 MM          |                                                                                                                     |
| LUMENS              | : 1100Lm                        |                                                                                                                     |
| IP RATING           | : IP54                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |                                                                                                                     |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 9W ( OUTDOOR BULKHEAD)        |  <p><b>PRO ELEGANT OVAL</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : W-245 MM X D-69 MM X H-139 MM |                                                                                                                     |
| LUMENS              | : 550Lm                         |                                                                                                                     |
| IP RATING           | : IP54                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |                                                                                                                     |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 25W                           |  <p><b>PRO CELLAR</b></p>       |
| FINISH & MATERIAL   | : PLASTIC BODY                  |                                                                                                                     |
| CCT(K)              | : 3000K                         |                                                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER              |                                                                                                                     |
| DIMENSION           | : DIA 280 X H 60 MM             |                                                                                                                     |
| LUMENS              | : 2000Lm                        |                                                                                                                     |
| IP RATING           | : IP65                          |                                                                                                                     |
| POWERED BY          | : DRIVER ON BOARD               |                                                                                                                     |

| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                                                           |
|---------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 8W                            |  <p><b>PRO PORCH SMALL</b></p>  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                   |
| CCT(K)              | : 3000K                         |                                                                                                                   |
| DIFFUSER            | : OPAL PC DIFFUSER              |                                                                                                                   |
| DIMENSION           | : 45 X H 160MM                  |                                                                                                                   |
| LUMENS              | : 4000Lm                        |                                                                                                                   |
| IP RATING           | : IP65                          |                                                                                                                   |
| IK RATING           | : IK08                          |                                                                                                                   |
| LAMP TYPE           | : SMD LED                       |                                                                                                                   |
| POWERED BY          | : EPISTAR                       |                                                                                                                   |
| WATTS               | : 14W                           |  <p><b>PRO PORCH BIG</b></p>    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                   |
| CCT(K)              | : 3000K                         |                                                                                                                   |
| DIFFUSER            | : OPAL PC DIFFUSER              |                                                                                                                   |
| DIMENSION           | : 50 X H 220MM                  |                                                                                                                   |
| LUMENS              | : 850Lm                         |                                                                                                                   |
| IP RATING           | : IP65                          |                                                                                                                   |
| IK RATING           | : IK08                          |                                                                                                                   |
| LAMP TYPE           | : SMD LED                       |                                                                                                                   |
| POWERED BY          | : EPISTAR                       |                                                                                                                   |
| WATTS               | : GU10 HOLDER                   |  <p><b>PRO DROP SQUARE</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY  |                                                                                                                   |
| DIFFUSER            | : GLASS DIFFUSER                |                                                                                                                   |
| DIMENSION           | : 88 X 88 X H 92MM              |                                                                                                                   |
| IP RATING           | : IP65                          |                                                                                                                   |
| POWERED BY          | : GU10 NOT INCLUDED             |                                                                                                                   |
| WATTS               | : GU10 HOLDER                   |  <p><b>PRO DROP ROUND</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY  |                                                                                                                   |
| DIFFUSER            | : GLASS DIFFUSER                |                                                                                                                   |
| DIMENSION           | : DIA 90 X H 100MM              |                                                                                                                   |
| IP RATING           | : IP65                          |                                                                                                                   |
| POWERED BY          | : GU10 NOT INCLUDED             |                                                                                                                   |
| WATTS               | : 7W                            |  <p><b>PRO TIAN 1</b></p>     |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM             |                                                                                                                   |
| CCT(K)              | : 3000K                         |                                                                                                                   |
| DIMENSION           | : 60 X H 61 MM                  |                                                                                                                   |
| LUMENS              | : 700Lm                         |                                                                                                                   |
| IP RATING           | : IP54                          |                                                                                                                   |
| LAMP TYPE           | : LED                           |                                                                                                                   |
| POWERED BY          | : CROM                          |                                                                                                                   |



| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                                                     |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |  <p><b>PRO TIAN 2</b></p> |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 75 X H 75 MM                    |                                                                                                             |
| LUMENS              | : 1200Lm                          |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : LED                             |                                                                                                             |
| POWERED BY          | : CROM                            |                                                                                                             |
| WATTS               | : 18W                             |  <p><b>PRO TIAN 3</b></p> |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 90 X H 90 MM                    |                                                                                                             |
| LUMENS              | : 1800Lm                          |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : LED                             |                                                                                                             |
| POWERED BY          | : CROM                            |                                                                                                             |
| WATTS               | : 3W                              |  <p><b>CLIP</b></p>      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 60 X H 16 MM                    |                                                                                                             |
| LUMENS              | : 270Lm                           |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : COB                             |                                                                                                             |
| POWERED BY          | : BRIDGELUX                       |                                                                                                             |
| WATTS               | : 5W                              |  <p><b>PROP C28</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 60 X H 110 MM                   |                                                                                                             |
| LUMENS              | : 500Lm                           |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : LED                             |                                                                                                             |
| POWERED BY          | : CREE                            |                                                                                                             |
| WATTS               | : 5W (Adjustable)                 |  <p><b>PROP C59</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 63 x H 170 MM                   |                                                                                                             |
| LUMENS              | : 500Lm                           |                                                                                                             |
| IP RATING           | : IP65                            |                                                                                                             |
| LAMP TYPE           | : COB                             |                                                                                                             |
| POWERED BY          | : CREE                            |                                                                                                             |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 90 X 150 MM                     |                                                                                      |
| LUMENS              | : 1200Lm                          |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP C25</b>                                                                      |
| WATTS               | : 18W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : Ø 88 x H 235 MM                 |                                                                                      |
| LUMENS              | : 1800Lm                          |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP C60</b>                                                                      |
| WATTS               | : 8W                              |   |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                      |
| BEAM ANGLE          | : 110°                            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| CRI                 | : ≥80                             |                                                                                      |
| DIMENSION           | : 90 X 46MM                       |                                                                                      |
| LUMENS              | : 720Lm                           |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP EMY 1</b>                                                                    |
| WATTS               | : 14W                             |  |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                      |
| BEAM ANGLE          | : 110°                            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| CRI                 | : ≥80                             |                                                                                      |
| DIMENSION           | : 140 X 46MM                      |                                                                                      |
| LUMENS              | : 1260Lm                          |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP EMY 2</b>                                                                    |
| WATTS               | : 6W (OUTDOOR WALL LIGHT)         |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIFFUSER            | : OPAL PC                         |                                                                                      |
| DIMENSION           | : W 220 MM X D-77 MM X H-90 MM    |                                                                                      |
| LUMENS              | : 500Lm                           |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PRO ENERGY SMALL</b>                                                              |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                              |
|---------------------|------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W (OUTDOOR WALL LIGHT)         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST    |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC                          |                                                                                      |
| DIMENSION           | : W 300 MM X D-97 MM X H-120 MM    |                                                                                      |
| LUMENS              | : 800Lm                            |                                                                                      |
| IP RATING           | : IP65                             |                                                                                      |
| LAMP TYPE           | : COB                              |                                                                                      |
| POWERED BY          | : CREE                             | <b>PRO ENERGY BIG</b>                                                                |
| WATTS               | : 8W (OUTDOOR WALL LIGHT)          |     |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST    |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC                          |                                                                                      |
| DIMENSION           | : W 60 MM X D-60 MM X H-144 MM     |                                                                                      |
| LUMENS              | : 720Lm                            |                                                                                      |
| IP RATING           | : IP65                             |                                                                                      |
| INPUT VOLTAGE       | : AC DRIVERLESS                    |                                                                                      |
| LAMP TYPE           | : SMD LED                          | <b>PRO AERO SMALL</b>                                                                |
| POWERED BY          | : EPISTAR                          |                                                                                      |
| WATTS               | : 13W                              |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                      |
| DIMENSION           | : 200 X 30 X H 135MM               |                                                                                      |
| LUMENS              | : 650Lm                            |                                                                                      |
| IP RATING           | : IP65                             |                                                                                      |
| LAMP TYPE           | : SMD LED                          |                                                                                      |
| POWERED BY          | : EPISTAR                          | <b>PRO AERO BRICK</b>                                                                |
| WATTS               | : 12W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : PC DIFFUSER                      |                                                                                      |
| DIMENSION           | : 215 X H 125MM                    |                                                                                      |
| LUMENS              | : 1000Lm                           |                                                                                      |
| IP RATING           | : IP65                             |                                                                                      |
| LAMP TYPE           | : COB                              |                                                                                      |
| POWERED BY          | : EPISTAR                          | <b>PRO PORCH IVY</b>                                                                 |
| WATTS               | : 10W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                      |
| DIMENSION           | : 200 X 85 X H 135MM               |                                                                                      |
| LUMENS              | : 700Lm                            |                                                                                      |
| IP RATING           | : IP54                             |                                                                                      |
| LAMP TYPE           | : SMD LED                          |                                                                                      |
| POWERED BY          | : EPISTAR                          | <b>PRO LUCY</b>                                                                      |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                                                                                                                  |
|---------------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 2 X 5W = 10W                     |                                                                                        |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                                                                                                          |
| CCT(K)              | : 3000K                            |                                                                                                                                                                          |
| DIFFUSER            | : PC DIFFUSER                      |                                                                                                                                                                          |
| DIMENSION           | : 115 X H120MM                     |                                                                                                                                                                          |
| LUMENS              | : 2 X 400Lm                        |                                                                                                                                                                          |
| IP RATING           | : IP65                             |                                                                                                                                                                          |
| LAMP TYPE           | : COB                              |                                                                                                                                                                          |
| POWERED BY          | : CREE                             | <b>PRO ROCK</b>                                                                                                                                                          |
| WATTS               | : 12W                              |                                                                                        |
| SENSOR              | : MOVEMENT SENSOR                  |                                                                                                                                                                          |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                                                                                                          |
| CCT(K)              | : 3000K                            |                                                                                                                                                                          |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                                                                                          |
| DIMENSION           | : 165 X 200 X H 153MM              |                                                                                                                                                                          |
| LUMENS              | : 900Lm                            |                                                                                                                                                                          |
| IP RATING           | : IP65                             |                                                                                                                                                                          |
| LAMP TYPE           | : SMD LED                          |                                                                                       |
| POWERED BY          | : EPISTAR                          |                                                                                                                                                                          |
| WATTS               | : 30W                              |                                                                                                                                                                          |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY     |                                                                                                                                                                          |
| CCT(K)              | : 3000K                            |                                                                                                                                                                          |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                                                                                          |
| DIMENSION           | : 264 X 117 X H 308MM              |                                                                                                                                                                          |
| IP RATING           | : IP65                             |                                                                                                                                                                          |
| POWERED BY          | : SMD LED                          | <b>PRO WOLLARD</b>                                                                                                                                                       |
| WATTS               | : 9W SMD LED                       |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY + ALUMINIUM + PC   |                                                                                                                                                                          |
| CCT(K)              | : 3000K                            |                                                                                                                                                                          |
| DIMENSION           | : H 210 x W 130 x D 103 MM         |                                                                                                                                                                          |
| IP RATING           | : IP65                             |                                                                                                                                                                          |
|                     |                                    |                                                                                                                                                                          |
|                     |                                    |                                                                                                                                                                          |
|                     |                                    |                                                                                                                                                                          |
|                     |                                    | <b>PRO FLINT</b>                                                                                                                                                         |
| WATTS               | : 2 x 9W                           |   |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY     |                                                                                                                                                                          |
| DIFFUSER            | : GLASS DIFFUSER                   |                                                                                                                                                                          |
| CCT(K)              | : 3000K                            |                                                                                                                                                                          |
| DIMENSION           | : DIA 85 X 83 X H 210MM            |                                                                                                                                                                          |
| IP RATING           | : IP65                             |                                                                                                                                                                          |
| POWERED BY          | : CREE                             |                                                                                                                                                                          |
|                     |                                    | <b>PRO LEVIS</b>                                                                                                                                                         |

| PRODUCT DESCRIPTION |                                             | PRODUCT                                                                              |
|---------------------|---------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                                        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & STEEL                     |                                                                                      |
| CCT(K)              | : 3000K                                     |                                                                                      |
| DIFFUSER            | : GLASS DIFFUSER                            |                                                                                      |
| DIMENSION           | : 110 X 320 X H 860MM                       |                                                                                      |
| LUMENS              | : 670Lm                                     |                                                                                      |
| IP RATING           | : IP44                                      |                                                                                      |
| LAMP TYPE           | : SMD LED                                   |                                                                                      |
| POWERED BY          | : EPISTAR                                   | <b>PRO BOSARO 1</b>                                                                  |
| WATTS               | : 7W                                        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & STEEL                     |                                                                                      |
| CCT(K)              | : 3000K                                     |                                                                                      |
| DIFFUSER            | : GLASS DIFFUSER                            |                                                                                      |
| DIMENSION           | : 130 X 320 X H 310MM                       |                                                                                      |
| LUMENS              | : 670Lm                                     |                                                                                      |
| IP RATING           | : IP44                                      |                                                                                      |
| LAMP TYPE           | : SMD LED                                   |                                                                                      |
| POWERED BY          | : EPISTAR                                   | <b>PRO BOSARO 2</b>                                                                  |
| WATTS               | : 12W                                       |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM + PC |                                                                                      |
| CCT(K)              | : 3000K                                     |                                                                                      |
| DIMENSION           | : 160 X 100 X 87 H MM                       |                                                                                      |
| IP RATING           | : IP54                                      |                                                                                      |
| LAMP TYPE           | : LED                                       |                                                                                      |
|                     |                                             |                                                                                      |
|                     |                                             |                                                                                      |
|                     |                                             | <b>PROP W48</b>                                                                      |
| WATTS               | : 6W                                        |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM      |                                                                                      |
| CCT(K)              | : 3000K                                     |                                                                                      |
| DIMENSION           | : 96 X 153 MM                               |                                                                                      |
| IP RATING           | : IP54                                      |                                                                                      |
| LAMP TYPE           | : LED                                       |                                                                                      |
| POWERED BY          | : EDISON                                    |                                                                                      |
|                     |                                             |                                                                                      |
|                     |                                             | <b>PROP W52</b>                                                                      |
| WATTS               | : 9W                                        |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM      |                                                                                      |
| CCT(K)              | : 3000K                                     |                                                                                      |
| DIMENSION           | : 165 X 118 MM                              |                                                                                      |
| IP RATING           | : IP54                                      |                                                                                      |
| LAMP TYPE           | : LED                                       |                                                                                      |
| POWERED BY          | : OSRAM                                     |                                                                                      |
|                     |                                             |                                                                                      |
|                     |                                             | <b>PROP W53</b>                                                                      |

| PRODUCT DESCRIPTION |                                        | PRODUCT                                                                              |
|---------------------|----------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 4 x 3W = 12W                         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.      |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 77 X 77 X H 57 MM                    |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : COB                                  |                                                                                      |
| POWERED BY          | : CREE                                 | <b>PROP W33</b>                                                                      |
| WATTS               | : 2 x 3W = 6W                          |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.      |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 77 X 77 X H 57 MM                    |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : COB                                  |                                                                                      |
| POWERED BY          | : CREE                                 | <b>PROP W34</b>                                                                      |
| WATTS               | : 5W                                   |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 65 X H 100 MM                        |                                                                                      |
| LUMENS              | : 500Lm                                |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : COB                                  |                                                                                      |
| POWERED BY          | : CREE                                 | <b>PROP W26</b>                                                                      |
| WATTS               | : 2 x 5W = 10W                         |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 65 X 175 MM                          |                                                                                      |
| LUMENS              | : 1000Lm                               |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : COB                                  |                                                                                      |
| POWERED BY          | : CREE                                 | <b>PROP W27</b>                                                                      |
| WATTS               | : 12W                                  |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 90 X H 135 MM                        |                                                                                      |
| LUMENS              | : 1200Lm                               |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : COB                                  |                                                                                      |
| POWERED BY          | : CREE                                 | <b>PROP W23</b>                                                                      |



| PRODUCT DESCRIPTION |                                         | PRODUCT                                                                              |
|---------------------|-----------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 x 12W = 24W                         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM  |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 90 X H 240 MM                         |                                                                                      |
| LUMENS              | : 2400Lm                                |                                                                                      |
| IP RATING           | : IP54                                  |                                                                                      |
| LAMP TYPE           | : COB                                   |                                                                                      |
| POWERED BY          | : CREE                                  |                                                                                      |
|                     |                                         | <b>PROP W24</b>                                                                      |
| WATTS               | : 1 x 12W (350 Degree Rotatable)        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.       |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 102 x 116 x 150 MM                    |                                                                                      |
| LUMENS              | : 960Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD                                   |                                                                                      |
| POWERED BY          | : CREE                                  |                                                                                      |
|                     |                                         | <b>PROP W57</b>                                                                      |
| WATTS               | : 2 x 12W (350 Degree Rotatable)        |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.       |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 102 x 217 x 150 MM                    |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD                                   |                                                                                      |
| POWERED BY          | : CREE                                  |                                                                                      |
|                     |                                         | <b>PROP W58</b>                                                                      |
| WATTS               | : 5W                                    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                      |                                                                                      |
| DIMENSION           | : 240 X 37 X H 75MM                     |                                                                                      |
| LUMENS              | : 300Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD LED                               |                                                                                      |
| POWERED BY          | : EPISTAR                               |                                                                                      |
|                     |                                         | <b>PRO ENERGY BELLE</b>                                                              |
| WATTS               | : 9W                                    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIFFUSER            | : GLASS DIFFUSER                        |                                                                                      |
| DIMENSION           | : 262 X 53 X H 55MM                     |                                                                                      |
| LUMENS              | : 650Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : LED                                   |                                                                                      |
| POWERED BY          | : EPISTAR                               |                                                                                      |
|                     |                                         | <b>PRO BRICK</b>                                                                     |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY    |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIFFUSER            | : CLEAR PC DIFFUSER               |                                                                                      |
| DIMENSION           | : 250 X 90 X H 98 MM              |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| POWERED BY          | : SMD LED                         | <b>PRO PARKER</b>                                                                    |
| WATTS               | : 4W                              |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 90 X 60 MM                      |                                                                                      |
| LUMENS              | : 560Lm                           |                                                                                      |
| IP RATING           | : IP54                            |    |
| LAMP TYPE           | : SMD                             |                                                                                      |
| POWERED BY          | : EDISON                          |                                                                                      |
| WATTS               | : 8W                              |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 150 X H 70 MM                   |                                                                                      |
| IP RATING           | : IP54                            |   |
| LAMP TYPE           | : SMD                             |                                                                                      |
| POWERED BY          | : EDISON                          |                                                                                      |
| WATTS               | : 3W                              |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 80 x H 75 MM                    |  |
| LUMENS              | : 270Lm                           |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
| WATTS               | : 2 x 3W = 6W                     |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 80 X H 140 MM                   |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP W22</b>                                                                      |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                                                     |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------|
| WATTS               | : 6W                              |  <p><b>SPREAD</b></p>     |
| FINISH & MATERIAL   | : BLACK & DIE CASTED ALU.         |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : L 80 x W 38 x H 80 MM           |                                                                                                             |
| LUMENS              | : 600Lm                           |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : COB                             |                                                                                                             |
| POWERED BY          | : BRIDGELUX                       |                                                                                                             |
| WATTS               | : 4W                              |  <p><b>PROP W40</b></p>   |
| FINISH              | : GRAPHITE GREY                   |                                                                                                             |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                                             |
| DIFFUSER            | : PC DIFFUSER                     |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 105 x H 105 MM                  |                                                                                                             |
| IP                  | : IP54                            |                                                                                                             |
| WATTS               | : 4W                              |  <p><b>PROP W41</b></p>  |
| FINISH              | : GRAPHITE GREY                   |                                                                                                             |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                                             |
| DIFFUSER            | : PC DIFFUSER                     |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : DIA 115 MM                      |                                                                                                             |
| IP                  | : IP54                            |                                                                                                             |
| WATTS               | : 3W                              |  <p><b>PROP F45</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : Ø 95 X 60 MM                    |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : LED                             |                                                                                                             |
| POWERED BY          | : OSRAM                           |                                                                                                             |
| WATTS               | : 3W                              |  <p><b>PROP F46</b></p> |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 95 X 95 X 60 MM                 |                                                                                                             |
| IP RATING           | : IP54                            |                                                                                                             |
| LAMP TYPE           | : LED                             |                                                                                                             |
| POWERED BY          | : OSRAM                           |                                                                                                             |


| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 5W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 250 X 45 X 45 H MM              |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : LED                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PROP F47</b>                                                                      |
| WATTS               | : 6W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 135 x 80 x H 75 MM              |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : SMD                             |                                                                                      |
|                     |                                   | <b>PROP F13</b>                                                                      |
| WATTS               | : 3W                              |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 45 x 84 x H 84 MM               |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : SMD                             |                                                                                      |
|                     |                                   | <b>PROP F14</b>                                                                      |
| WATTS               | : OUTDOOR SPOTLIGHT WITH SPIKE    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY   |                                                                                      |
| DIFFUSER            | : CLEAR PC DIFFUSER               |                                                                                      |
| DIMENSION           | : W 80 MM X D-130 MM X H-113 MM   |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : GU10 LED MAX 6W (LAMP EXCLUDED) |                                                                                      |
|                     |                                   | <b>PRO RADIUS</b>                                                                    |
| WATTS               | : OUTDOOR SPOTLIGHT WITH SPIKE    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST   |                                                                                      |
| DIFFUSER            | : CLEAR GLASS                     |                                                                                      |
| DIMENSION           | : D 98 x 95 x 59 MM               |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : GU10 MAX 6W (LAMP EXCLUDED)     |                                                                                      |
|                     |                                   | <b>PRO RISE</b>                                                                      |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                             |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------|
| WATTS               | : GU10 (Not Included)             |    |
| FINISH & MATERIAL   | : BLACK & DIE CASTED ALU.         |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : Ø 60 x H 113 MM                 |                                                                                     |
| IP RATING           | : Ip54                            |                                                                                     |
|                     |                                   | <b>SPIKE GU10</b>                                                                   |
| WATTS               | : 3W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALUMINIUM       |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 45 X 68 X H 160 MM              |                                                                                     |
| LUMENS              | : 300Lm                           |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CROM                            |                                                                                     |
|                     |                                   | <b>PRO ORSA 1</b>                                                                   |
| WATTS               | : 12W                             |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALUMINIUM       |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 66 X 100 X H 160 MM             |                                                                                     |
| LUMENS              | : 1200Lm                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CROM                            |                                                                                     |
|                     |                                   | <b>PRO ORSA 2</b>                                                                   |
| WATTS               | : 7W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 91 X 64 X H 186 MM              |                                                                                     |
| LUMENS              | : 560Lm                           |                                                                                     |
| IP RATING           | : IP54                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP S29</b>                                                                     |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 95 x 84 x H 186 MM              |                                                                                     |
| LUMENS              | : 1080Lm                          |                                                                                     |
| IP RATING           | : IP54                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP S30</b>                                                                     |

| PRODUCT DESCRIPTION |                                                 | PRODUCT                                                                              |
|---------------------|-------------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W (OUTDOOR WALL LIGHT)                      |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST                 |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : CLEAR GLASS                                   |                                                                                      |
| DIMENSION           | : W 160 MM X D-235 MM X H-95 MM                 |                                                                                      |
| LUMENS              | : 800Lm                                         |    |
| IP RATING           | : IP65                                          |                                                                                      |
| LAMP TYPE           | : COB                                           |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
|                     |                                                 | <b>PRO ALROUND</b>                                                                   |
| WATTS               | : 9W                                            |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST                 |                                                                                      |
| BEAM ANGLE          | : ADJUSTABLE BEAM ANGLE (30°-60°)               |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : CLEAR GLASS                                   |                                                                                      |
| DIMENSION           | : W 85 MM X D-154 MM X H-150 MM                 |   |
| LUMENS              | : 800Lm                                         |                                                                                      |
| IP RATING           | : IP65                                          |                                                                                      |
| LAMP TYPE           | : COB                                           |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
|                     |                                                 | <b>PRO ARISE</b>                                                                     |
| WATTS               | : 15W                                           |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.               |                                                                                      |
| BEAM ANGLE          | : 15° x 45°                                     |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIMENSION           | : W 40 X H 30 X L 500 MM                        |                                                                                      |
| IP RATING           | : IP67                                          |  |
| LAMP TYPE           | : PCB                                           |                                                                                      |
| INPUT               | : <b>DC 24V (Driver not Included)</b>           |                                                                                      |
| POWERED BY          | : OSRAM                                         |                                                                                      |
|                     |                                                 | <b>PRO VENICE 1</b>                                                                  |
| WATTS               | : 30W                                           |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED AL                 |                                                                                      |
| BEAM ANGLE          | : 15° x 45°                                     |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIMENSION           | : W 40 X H 30 X L 1000 MM                       |                                                                                      |
| IP RATING           | : IP67                                          |  |
| LAMP TYPE           | : PCB                                           |                                                                                      |
| INPUT               | : <b>DC 24V (Driver not Included)</b>           |                                                                                      |
| POWERED BY          | : OSRAM                                         |                                                                                      |
|                     |                                                 | <b>PRO VENICE 2</b>                                                                  |
| WATTS               | : 2 X 1W = 2W<br>(SURFACE MOUNTED GROUND LIGHT) |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST                 |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : CLEAR PC                                      |                                                                                      |
| DIMENSION           | : DIA 210 MM X D-50 MM                          |                                                                                      |
| IP RATING           | : IP67                                          |  |
| IK RATING           | : IK10                                          |                                                                                      |
| MAX WEIGHT          | : 2000KG                                        |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
|                     |                                                 | <b>PRO TWIN</b>                                                                      |



| PRODUCT DESCRIPTION |                                                 | PRODUCT                                                                              |
|---------------------|-------------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 4 X 1W = 4W<br>(SURFACE MOUNTED GROUND LIGHT) |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST                 |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : CLEAR PC                                      |                                                                                      |
| DIMENSION           | : DIA 210 MM X D-50 MM                          |                                                                                      |
| IP RATING           | : IP67                                          |                                                                                      |
| IK RATING           | : IK10                                          |                                                                                      |
| MAX WEIGHT          | : 2000KG                                        |    |
| POWERED BY          | : CREE                                          |                                                                                      |
| WATTS               | : 9W                                            |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                      |
| DIMENSION           | : 107 X H 140MM                                 |                                                                                      |
| LUMENS              | : 720Lm                                         |                                                                                      |
| IP RATING           | : IP65                                          |                                                                                      |
| LAMP TYPE           | : SMD LED                                       |    |
| POWERED BY          | : EPISTAR                                       |                                                                                      |
| WATTS               | : 9W                                            |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                      |
| DIMENSION           | : 107 X H 400MM                                 |                                                                                      |
| LUMENS              | : 720Lm                                         |                                                                                      |
| IP RATING           | : IP65                                          |   |
| LAMP TYPE           | : SMD LED                                       |                                                                                      |
| POWERED BY          | : EPISTAR                                       |                                                                                      |
| WATTS               | : 9W                                            |                                                                                      |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                      |
| DIMENSION           | : 107 X H 600MM                                 |                                                                                      |
| LUMENS              | : 720Lm                                         |  |
| IP RATING           | : IP65                                          |                                                                                      |
| LAMP TYPE           | : SMD LED                                       |                                                                                      |
| POWERED BY          | : EPISTAR                                       |                                                                                      |
| WATTS               | : 5W                                            |                                                                                      |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALUMINIUM                 |                                                                                      |
| CCT(K)              | : 3000K                                         |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                              |  |
| DIMENSION           | : 200 X 140 X H 50 MM                           |                                                                                      |
| LUMENS              | : 500Lm                                         |                                                                                      |
| IP RATING           | : IP44                                          |                                                                                      |
| LAMP TYPE           | : SMD LED                                       |                                                                                      |
| POWERED BY          | : EPISTAR                                       |                                                                                      |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                             |
|---------------------|------------------------------------|-------------------------------------------------------------------------------------|
| WATTS               | : 5W                               |    |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALUMINIUM    |                                                                                     |
| CCT(K)              | : 3000K                            |                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                     |
| DIMENSION           | : 200 X H 800 X 50 MM              |                                                                                     |
| LUMENS              | : 500Lm                            |                                                                                     |
| IP RATING           | : IP44                             |                                                                                     |
| LAMP TYPE           | : SMD LED                          |                                                                                     |
| POWERED BY          | : EPISTAR                          | <b>PRO POLISH 2</b>                                                                 |
| WATTS               | : 12W                              |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                     |
| CCT(K)              | : 3000K                            |                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                     |
| DIMENSION           | : 100 X 100 X H 150MM              |                                                                                     |
| LUMENS              | : 600Lm                            |                                                                                     |
| IP RATING           | : IP65                             |                                                                                     |
| LAMP TYPE           | : SMD LED                          |                                                                                     |
| POWERED BY          | : EPISTAR                          | <b>PRO TRONO 1</b>                                                                  |
| WATTS               | : 12W                              |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                     |
| CCT(K)              | : 3000K                            |                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                     |
| DIMENSION           | : 100 X 100 X H 500MM              |                                                                                     |
| LUMENS              | : 600Lm                            |                                                                                     |
| IP RATING           | : IP65                             |                                                                                     |
| LAMP TYPE           | : SMD LED                          |                                                                                     |
| POWERED BY          | : EPISTAR                          | <b>PRO TRONO 2</b>                                                                  |
| WATTS               | : 12W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                     |
| CCT(K)              | : 3000K                            |                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                     |
| DIMENSION           | : 100 X 100 X H 800MM              |                                                                                     |
| LUMENS              | : 600Lm                            |                                                                                     |
| IP RATING           | : IP65                             |                                                                                     |
| LAMP TYPE           | : SMD LED                          |                                                                                     |
| POWERED BY          | : EPISTAR                          | <b>PRO TRONO 3</b>                                                                  |
| WATTS               | : 6W                               |  |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY     |                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                     |
| CCT(K)              | : 3000K                            |                                                                                     |
| DIMENSION           | : 100 X 50 X H 250MM               |                                                                                     |
| IP RATING           | : IP65                             |                                                                                     |
| POWERED BY          | : SMD 2835                         |                                                                                     |
|                     |                                    | <b>PRO PATH</b>                                                                     |

| PRODUCT DESCRIPTION |                                        | PRODUCT                                                                              |
|---------------------|----------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 5W = 10W                         |     |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALU.             |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                     |                                                                                      |
| DIMENSION           | : 110 X 60 X H 340 MM                  |                                                                                      |
| LUMENS              | : 1100Lm                               |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : SMD LED                              |                                                                                      |
| POWERED BY          | : EPISTAR                              | <b>PRO POT 1</b>                                                                     |
| WATTS               | : 2 X 5W = 10W                         |     |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALU.             |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                     |                                                                                      |
| DIMENSION           | : 110 X 60 X H 770 MM                  |                                                                                      |
| LUMENS              | : 1100Lm                               |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| LAMP TYPE           | : SMD LED                              |                                                                                      |
| POWERED BY          | : EPISTAR                              | <b>PRO POT 2</b>                                                                     |
| WATTS               | : 12W SMD LED (SPIKE LIGHT)            |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. + PC            |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : H 500 X W 110 X 18 MM (SPIKE 200 MM) |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| POWERED BY          | : CREE                                 |                                                                                      |
| WIRE                | : 1 MTR. CABLE                         |                                                                                      |
|                     |                                        | <b>PRO CHARCOAL</b>                                                                  |
| WATTS               | : 3W                                   |  |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALU.             |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 120 X H 240 MM                       |                                                                                      |
| LUMENS              | : 270Lm                                |                                                                                      |
| IP RATING           | : IP65                                 |                                                                                      |
| POWERED BY          | : OSRAM                                |                                                                                      |
|                     |                                        | <b>PRO CUBO 1</b>                                                                    |
| WATTS               | : E27 HOLDER                           |  |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM                    |                                                                                      |
| CCT(K)              | : 3000K                                |                                                                                      |
| DIMENSION           | : 200 X W 200 X H 335 MM               |                                                                                      |
| IP RATING           | : IP54                                 |                                                                                      |
| POWERED BY          | : LAMP NOT INCLUDED                    |                                                                                      |
|                     |                                        | <b>PRO PYRAMID 1</b>                                                                 |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                             |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALU.        |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 103 X H 350 MM                  |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| POWERED BY          | : EPISTAR                         |                                                                                     |
|                     |                                   | <b>PRO AQUA 1</b>                                                                   |
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALU.        |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 103 X H 600 MM                  |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| POWERED BY          | : EPISTAR                         |                                                                                     |
|                     |                                   | <b>PRO AQUA 2</b>                                                                   |
| WATTS               | : 5W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : Ø 89 x 90 MM                    |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP W64</b>                                                                     |
| WATTS               | : 5W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 500 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B65</b>                                                                     |
| WATTS               | : 12W + 2W (Switch Changing)      |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 500 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B66</b>                                                                     |


| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                                                     |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |  <p><b>PROP W36</b></p>   |
| FINISH              | : GRAPHITE GREY                   |                                                                                                             |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 45 x H 180 MM                   |                                                                                                             |
| POWERED BY          | : EDISON                          |                                                                                                             |
| WATTS               | : 12W                             |  <p><b>PROP W20</b></p>   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 190 X 160 MM                    |                                                                                                             |
| LUMENS              | : 960Lm                           |                                                                                                             |
| POWERED BY          | : EDISON                          |                                                                                                             |
| WATTS               | : 12W                             |  <p><b>PROP B19</b></p>   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                                             |
| CCT(K)              | : 3000K                           |                                                                                                             |
| DIMENSION           | : 180 X 500MM                     |                                                                                                             |
| LUMENS              | : 960Lm                           |                                                                                                             |
| POWERED BY          | : EDISON                          |                                                                                                             |
| WATTS               | : 12W                             |  <p><b>PROP W37</b></p> |
| FINISH              | : GRAPHITE GREY                   |                                                                                                             |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                                             |
| DIFFUSER            | : PC DIFFUSER                     |                                                                                                             |
| DIMENSION           | : 105 x H 290 MM                  |                                                                                                             |
| POWERED BY          | : EDISON                          |                                                                                                             |
| WATTS               | : 12W                             |  <p><b>PROP G38</b></p>  |
| FINISH              | : GRAPHITE GREY                   |                                                                                                             |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                                             |
| DIFFUSER            | : PC DIFFUSER                     |                                                                                                             |
| DIMENSION           | : 105 x H 305 MM                  |                                                                                                             |
| POWERED BY          | : EDISON                          |                                                                                                             |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |     |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                      |
| DIFFUSER            | : PC DIFFUSER                     |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 105 x H 500 MM                  |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP B39</b>                                                                      |
| WATTS               | : 12W                             |     |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : D 140 x H 254 MM                |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP B49</b>                                                                      |
| WATTS               | : 12W                             |    |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : D 140 x H 508 MM                |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP B50</b>                                                                      |
| WATTS               | : 12W                             |   |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| MATERIAL            | : ALUMINIUM DIE CASTED            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : D 140 x H 762 MM                |                                                                                      |
| IP                  | : IP54                            |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP B51</b>                                                                      |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 254 MM                          |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP B67</b>                                                                      |



| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                             |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 508 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B68</b>                                                                     |
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 254 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B69</b>                                                                     |
| WATTS               | : 12W                             |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 508 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B70</b>                                                                     |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 254 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B71</b>                                                                     |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 508 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B72</b>                                                                     |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                             |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------|
| WATTS               | : 5W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 762 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B73</b>                                                                     |
| WATTS               | : 2 x 5W                          |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : 762 MM                          |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : COB                             |                                                                                     |
| POWERED BY          | : CREE                            |                                                                                     |
|                     |                                   | <b>PROP B74</b>                                                                     |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : H 330 MM                        |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : SMD                             |                                                                                     |
| POWERED BY          | : BRIDGELUX                       |                                                                                     |
|                     |                                   | <b>PROP W75</b>                                                                     |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| CCT(K)              | : 3000K                           |                                                                                     |
| DIMENSION           | : H 510 MM                        |                                                                                     |
| IP RATING           | : IP65                            |                                                                                     |
| LAMP TYPE           | : SMD                             |                                                                                     |
| POWERED BY          | : BRIDGELUX                       |                                                                                     |
|                     |                                   | <b>PROP B76</b>                                                                     |
| WATTS               | : E-27 (Lamp not Included)        |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                     |
| DIMENSION           | : 180 x 760 MM                    |                                                                                     |
| IP RATING           | : IP54                            |                                                                                     |
|                     |                                   | <b>PROP B15</b>                                                                     |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : E27 (Lamp not Included)         |     |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 180 X 500 MM                    |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP B16</b>                                                                      |
| WATTS               | : E-27 (Lamp not Included)        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 180 x 230 MM                    |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP G17</b>                                                                      |
| WATTS               | : E-27 (Lamp not Included)        |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 180 x 230 MM                    |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP W18</b>                                                                      |
| WATTS               | : E-27 (Lamp not Included)        |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 210 x H 205 MM                  |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP G42</b>                                                                      |
| WATTS               | : E27 (Lamp not Included)         |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : Ø 210 x H 205 MM                |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP W61</b>                                                                      |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : E27 (Lamp not Included)         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 215 X H 200 MM                  |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP G43</b>                                                                      |
| WATTS               | : E27 (Lamp not Included)         |     |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : Ø 215 x H 500 MM                |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP B62</b>                                                                      |
| WATTS               | : E27 (Lamp not Included)         |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : Ø 215 x H 200 MM                |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP W63</b>                                                                      |
| WATTS               | : E27 (Lamp not Included)         |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 254 X H 254 MM                  |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP G44</b>                                                                      |
| WATTS               | : E-27 (Lamp not Included)        |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| DIMENSION           | : 153 x H 153 MM                  |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
|                     |                                   | <b>PROP G54</b>                                                                      |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATT                | : 20W                             |     |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALUMINUM |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : 2 FT. × D 75 MM                 |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO ENTICER 1</b>                                                                 |
| WATT                | : 40W                             |     |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALUMINUM |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : 4 FT. × D 75 MM                 |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO ENTICER 2</b>                                                                 |
| WATT                | : 80W                             |    |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALUMINUM |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : 8 FT. × D 75 MM                 |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO ENTICER 3</b>                                                                 |
| WATT                | : 50W                             |  |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALUMINUM |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : D 395 MM × H 275 MM             |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO POST TOP 1</b>                                                                |
| WATT                | : 50W                             |  |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALUMINUM |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : D 395 MM × H 65 MM              |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO POST TOP 2</b>                                                                |

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATT                | : 2 X 50W                         |    |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALU.     |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : L 920 MM × H 65 MM              |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       |                                                                                      |
|                     |                                   | <b>PRO POST TOP 3</b>                                                                |
| ONLY POLE           |                                   |     |
| MATERIAL            | : DIE CAST ALUMINUM               |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| DIAMENTION          | : HEIGHT 10 FT. X D 75 MM         |                                                                                      |
|                     |                                   | <b>PRO POLE 1</b>                                                                    |
| WATTS               | : 7W                              |   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 85 X 90 MM                      |                                                                                      |
| LUMENS              | : 560Lm                           |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP U31</b>                                                                      |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 110 X H 100 MM                  |                                                                                      |
| LUMENS              | : 960Lm                           |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            |                                                                                      |
|                     |                                   | <b>PROP U32</b>                                                                      |



“Our History  
is similar to a tree:  
Solid values  
anchored in the Roots,  
continuous Evolution  
from the leaves,  
but always  
searching for the Light.”

#### **GENERAL TERMS & CONDITIONS**

- PRICES ARE IN INDIAN RUPEES.
- ALL PRICES ARE SUBJECT TO LIGHT INSIDE GENERAL TERMS & CONDITIONS OF BUSINESS.
- GOODS ARE DESPATCHED BY US ON PURCHASER'S RISK. ALL CLAIMS FOR LOSS, DAMAGE OR SHORTAGE WILL BE FILLED BY THE PURCHASERS DIRECTLY WITH THE CARRIERS.
- DESIGN CHANGES IS ROUTINE PRACTICE AT PRISHA ILLUMINATION FOR BETTER IMPROVEMENT DATA PROVIDED MAY CHANGE WITHOUT ANY PRIOR INTIMATION. CUSTOMERS ARE ADVISED TO RECONFIRM THE DATA OR PRODUCTS DIMENSIONS BEFORE PURCHASE.
- PRICES ARE SUBJECTS TO CHANGE WITHOUT ANY PRIOR INTIMATION.
- ORDERS SHOULD BE PLACED AGAINST THE CONFIRMED PURCHASE ORDER ONLY.
- WARRANTY BECOMES VOID IF THE PRODUCT IS IMPROPERLY APPLIED AND IF THE DAMAGE IS CAUSED BY IMPROPER USE OR INSTALLATION.
- FUNDAMENTAL FAILURE'S THAT WILL NOT BE CONSIDERED FOR WARRANTY, PHYSICAL DAMAGE OF ANY COMPONENTS OR PRODUCT , DUE TO IMPROPER HANDLING.
- COLOUR OF THE PRODUCT IN PHOTO MAY VARY FROM THE ACTUAL PRODUCT.
- DISPUTES, IF ANY ARE SUBJECT TO AHMEDABAD JURIDICITION ONLY.
- ALL DEALERS / CUSTOMERS ARE ADVISED TO TAKE MATERIAL/ORDER AFTER APPROVING PHYSICAL SAMPLE. DIMENSIONS AND CUT OUT AS MENTIONED IN PRICE LIST MAY VARY FROM ACTUAL PRODUCT AS PER LOT TO LOT. FURTHER NO CLAIM WE WILL BE ENTERTAINED BY COMPANY.

Marketed by :

## LIGHT | *INSIDE* PVT LTD

FF-1/2, Maruti Arcade, Shivranjani Cross Roads, Satellite, Ahmedabad-380 015.  
Gujarat. India. Cell : +91 87585 28782 +91 98254 31492

E-mail : prishaillumination@lightinside.in • dhaval@prishaillumination.com

Website : www.prishaillumination.com

