

PRISHA
ILLUMINATION



TECH NOLOGY
2026

PRISHA
ILLUMINATION




TECH NOLOGY
INDOOR

PIXELLUX

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step


Life Time

> 30,000h - L90 - B10 (Ta 25°C)


Colour Rendering Index - Optional

90 95 98

Beam Angle



Color Temperature [CCT]

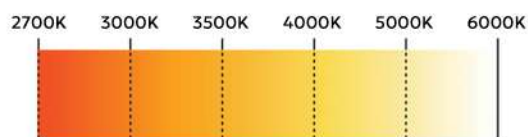

Lamp Cup Colour





Finishing



Fabrication Method

Precision Machined Parts



SPECIFICATIONS

Model No.	PIXELLUX
Input Voltage	AC 220V
Power	8W 15W
Material	Aluminum
Lamp Size	8W - Ø52*H108mm (Cutout: Ø45)
	15W - Ø72*H113mm (Cutout: Ø65)
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)


(Note: Front Openable)



INSETA

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step

Life Time


> 30,000h - L90 - B10 (Ta 25°C)

Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]

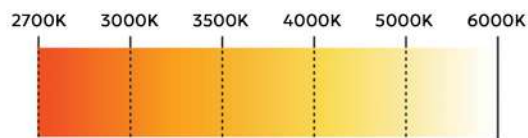

Lamp Cup Colour



Finishing




Fabrication Method

Precision Machined Parts

SPECIFICATIONS


Model No.	INSETA
Input Voltage	AC 220V
Power	12W 18W 25W 35W
Material	Aluminum
Lamp Size	12W - $\Phi 84 \times H63.5$ mm Cutout: $\Phi 75$ mm
	18W - $\Phi 106 \times H68$ mm Cutout: $\Phi 95$ mm
	25W - $\Phi 140 \times H81$ mm Cutout: $\Phi 125$ mm
	35W - $\Phi 170 \times H81$ mm Cutout: $\Phi 145$ mm
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

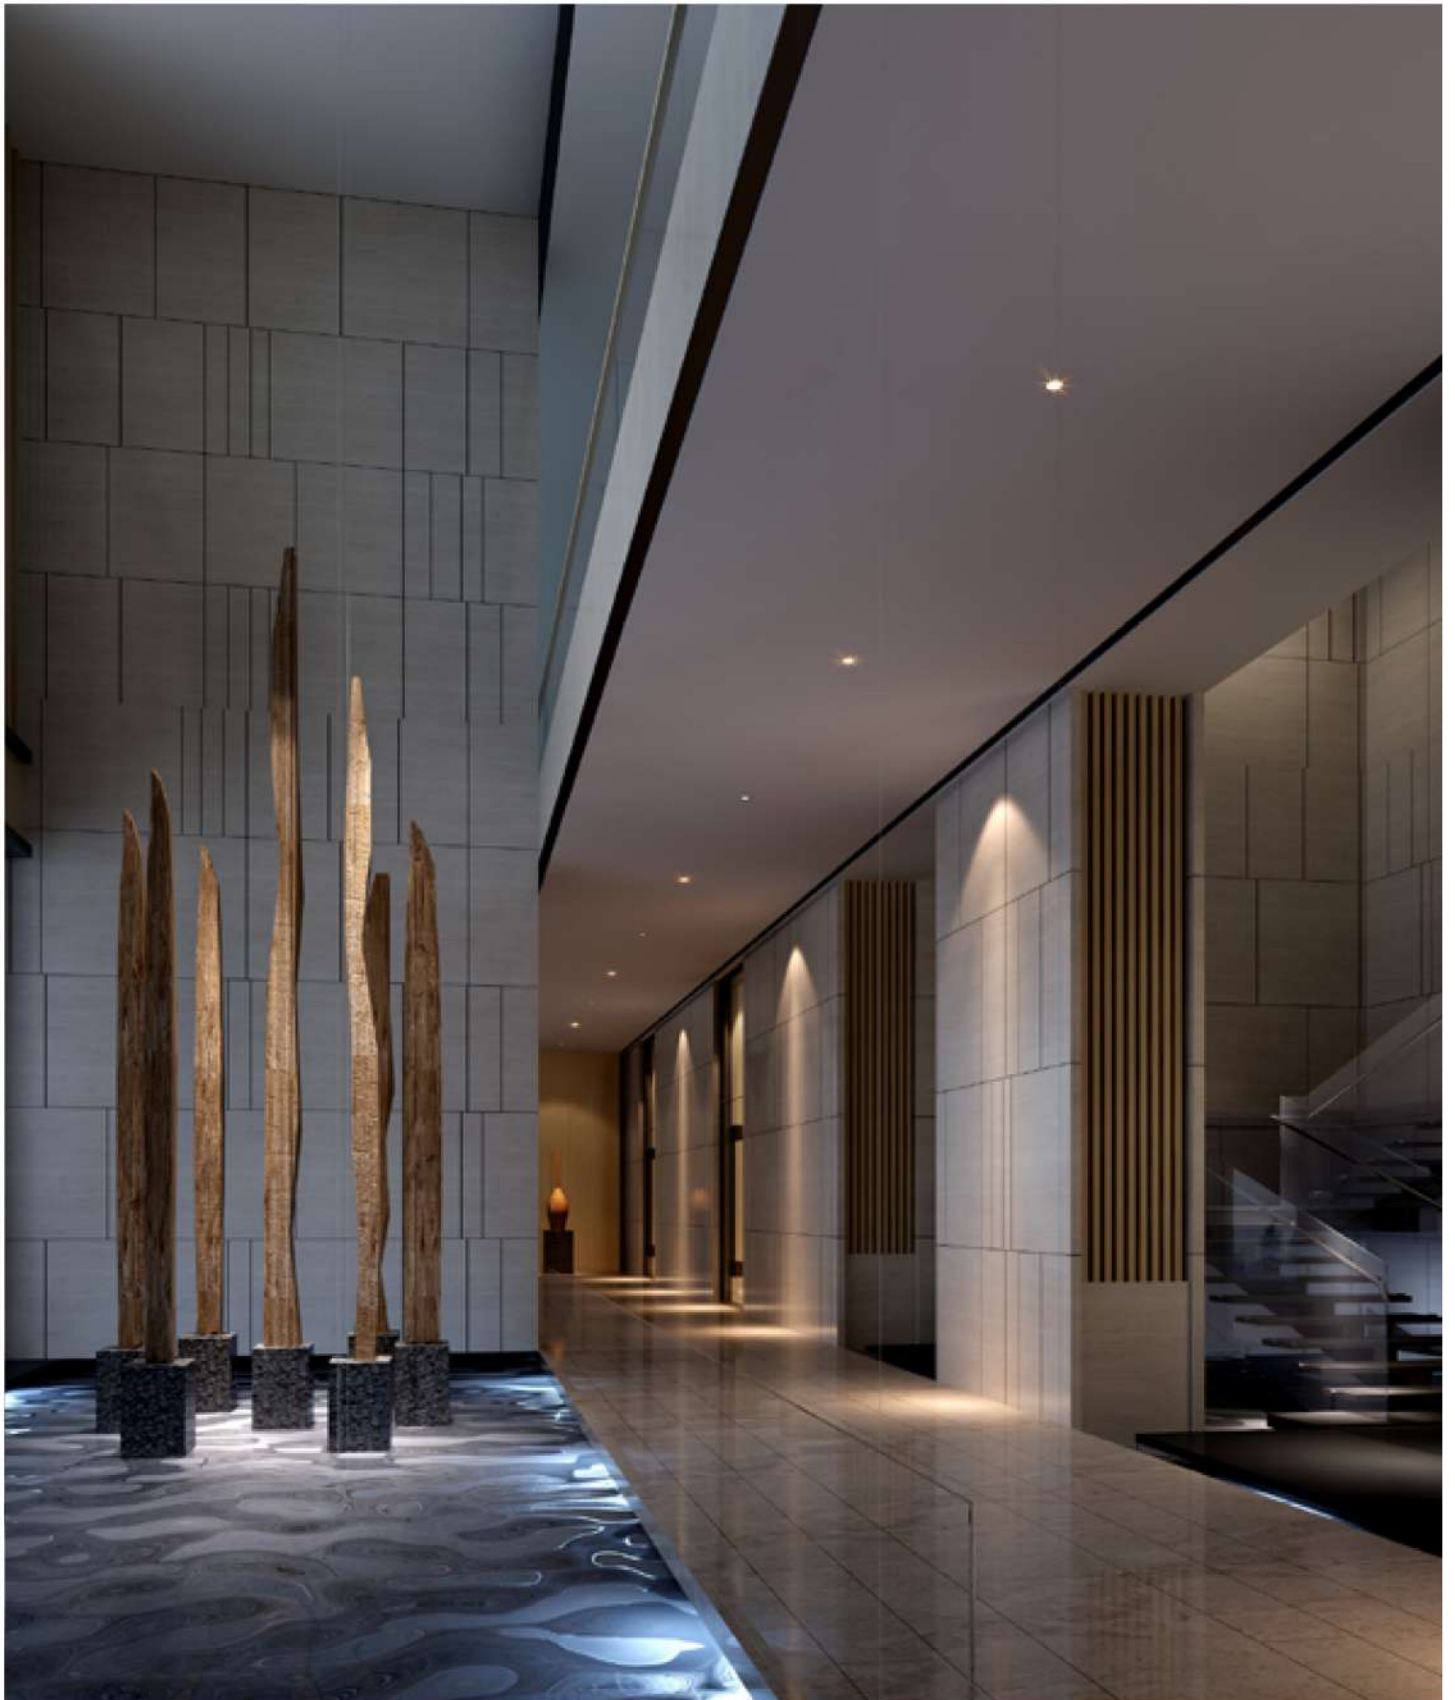

CORTIVA

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step


Life Time

> 30,000h - L90 - B10 (Ta 25°C)


Colour Rendering Index - Optional

90 95 98


Beam Angle



Color Temperature [CCT]

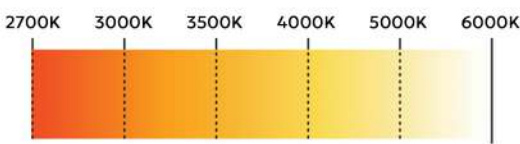

Lamp Cup Colour




Finishing



Fabrication Method

Precision Machined Parts

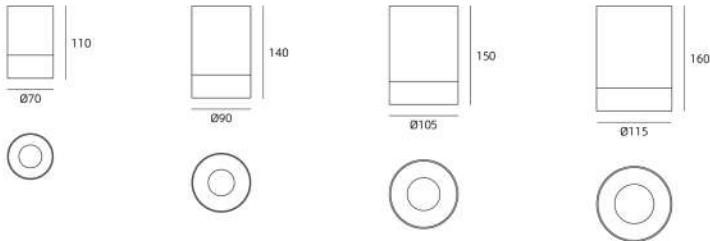


SPECIFICATIONS	
Model No.	CORTIVA
Input Voltage	AC 220V
Power	8W 15W 25W 35W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	8W - Ø70*H110mm
	15W - Ø90*H140mm
	25W - Ø105*H150mm
	35W - Ø115*H160mm
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)



LUXBLADE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi




SDCM - Optional

2 Step / 3 Step

Life Time

> 30,000h - L90 - B10 (Ta 25°C)



Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]

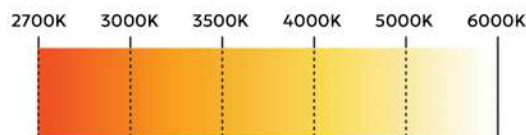

Lamp Cup Colour

-  Gun Black
-  Chrome
-  Matt Silver
-  White

Finishing


- ☐ Matt White
- ☒ Matt Black

Fabrication Method

Precision Casting

SPECIFICATIONS

Model No.	LUXBLADE
Input Voltage	AC 220V
Power	5*2W 10*2W
Material	Aluminum
Lamp Size	5*2W - 147*45*H52mm (Cutout: 138*37)
	10*2W - 280*45*H52mm (Cutout: 275*37)
Led Type	SMD
Led Brand	Bridgelux
Driver Brand	Eaglerise / Tridonic (Optional)

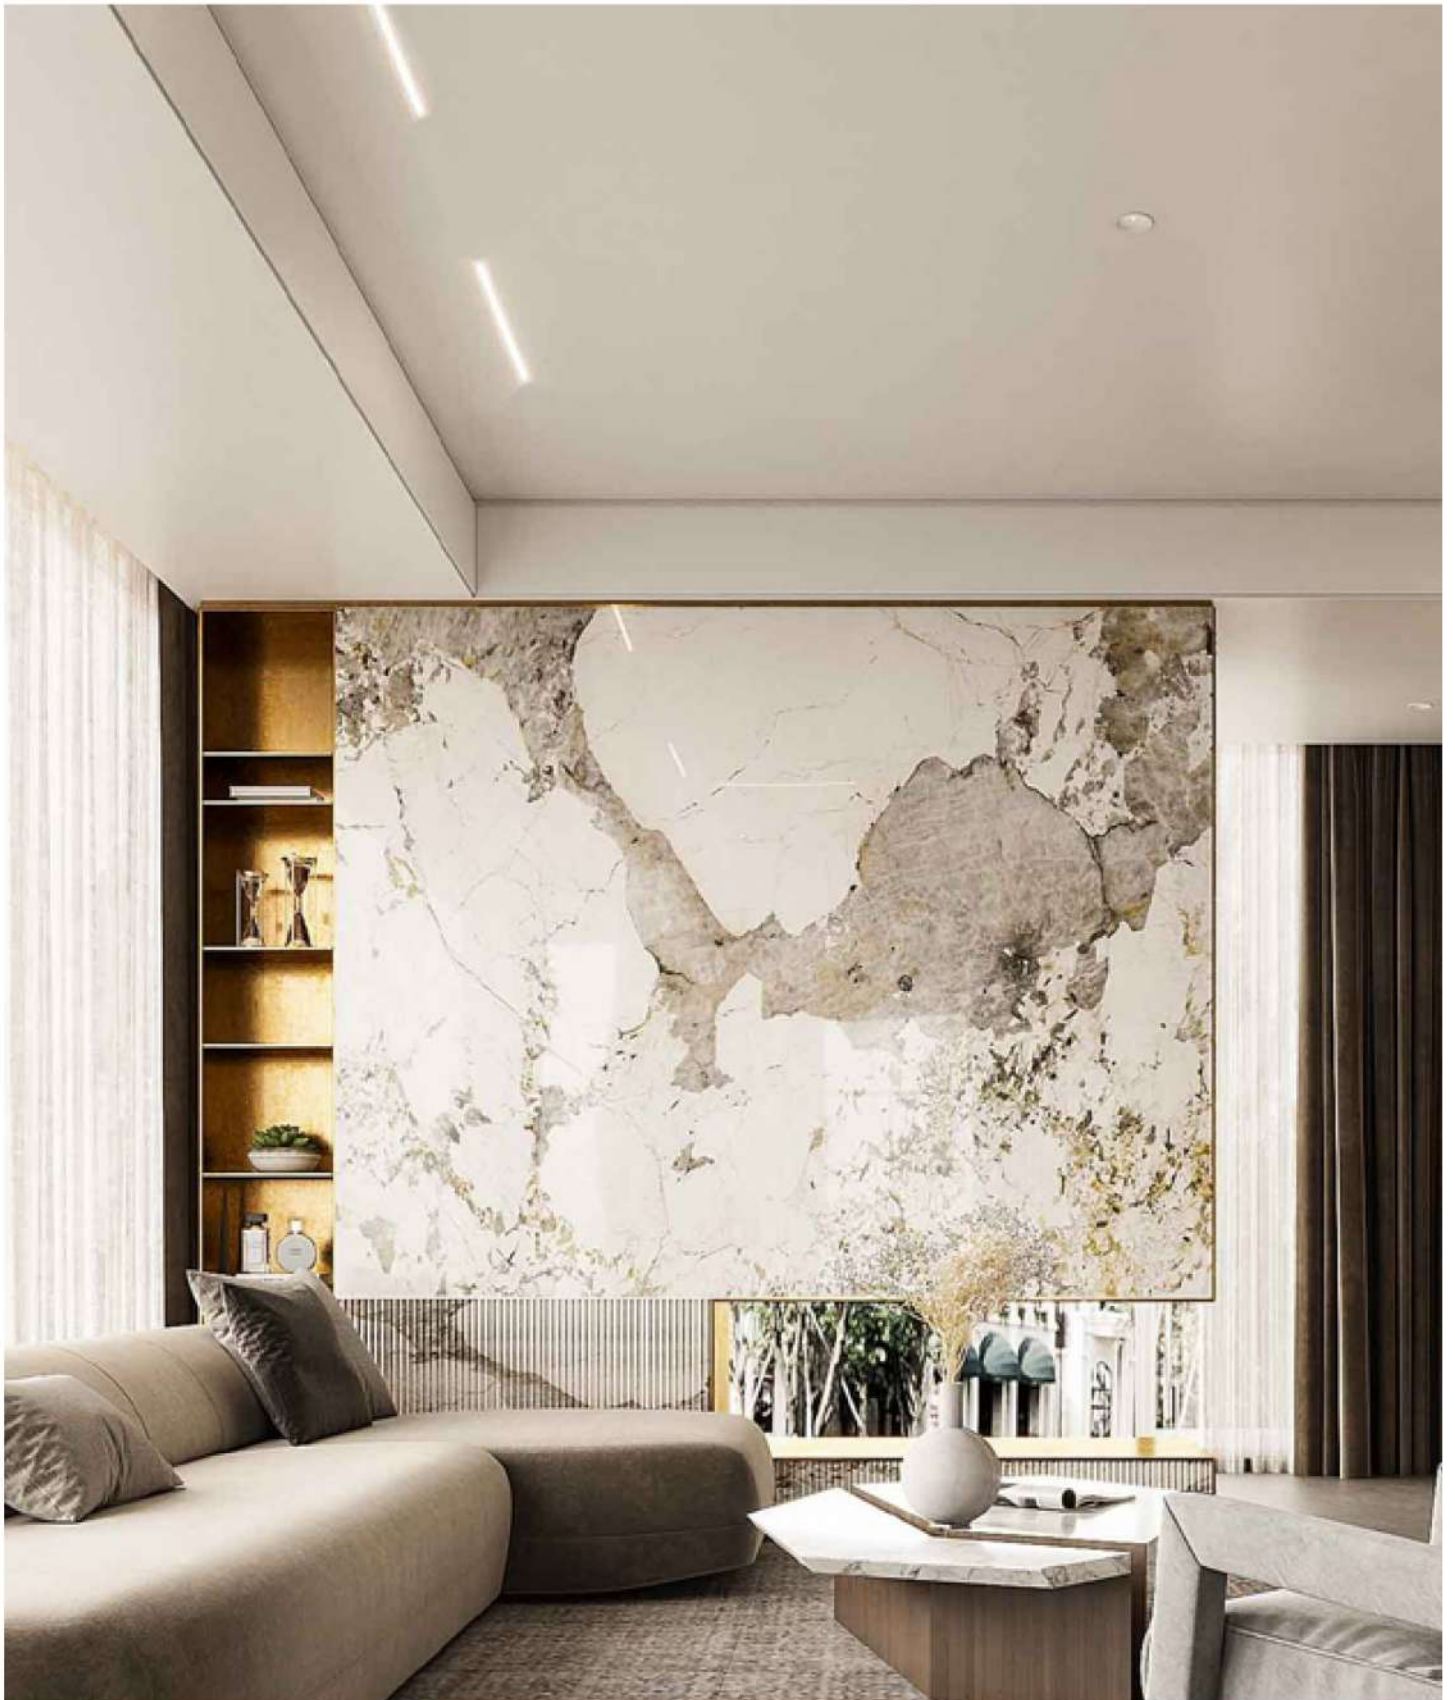

RETAILUX

Controllable

On / Off

Tunable

0 - 10V

Dali

DMX 512

Casambi

SDCM - Optional

2 Step / 3 Step

Life Time

> 30,000h - L90 - B10 (Ta 25°C)

Colour Rendering Index - Optional

90

95

98

Beam Angle

15°

24°

36°

Color Temperature [CCT]

2700K

3000K

3500K

4000K

5000K

6000K


Finishing

☐ Matt White

☒ Matt Black

Fabrication Method

Precision Machined Parts




SPECIFICATIONS	
Model No.	RETAILUX
Input Voltage	AC 220V
Power	20W
Material	Aluminum
Lamp Size	20W - Φ92.5*H100mm Cutout: ø90
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

TRAXLINE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step


Life Time

> 30,000h - L90 - B10 (Ta 25°C)


Colour Rendering Index - Optional

90 95 98

Beam Angle



Color Temperature [CCT]

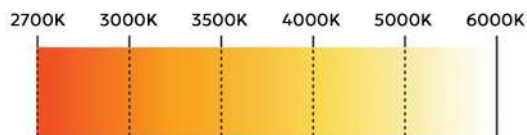

Lamp Cup Colour




Finishing



Fabrication Method

Precision Machined Parts

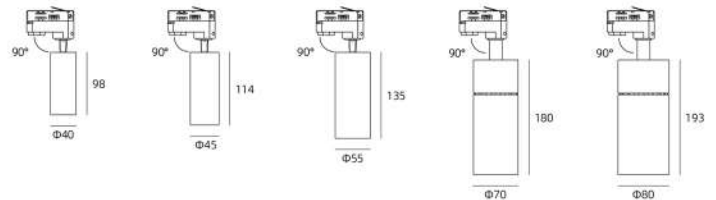

SPECIFICATIONS


Model No.	TRAXLINE
Input Voltage	AC 220V
Power	10W 15W 20W 25W 35W
Mounting	Track Mount
Material	Aluminum
Lamp Size	10W - Ø40*H98mm 15W - Ø45*H114mm 20W - Ø55*H135mm 25W - Ø70*H180mm 35W - Ø80*H193mm
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)



FLEXLUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step


Life Time

> 30,000h - L90 - B10 (Ta 25°C)


Colour Rendering Index

90 95 98


Beam Angle

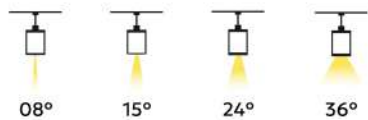

Color Temperature [CCT]

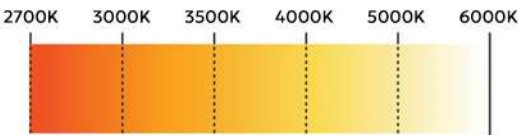

Lamp Cup Colour




Finishing




Fabrication Method

Precision Machined Parts

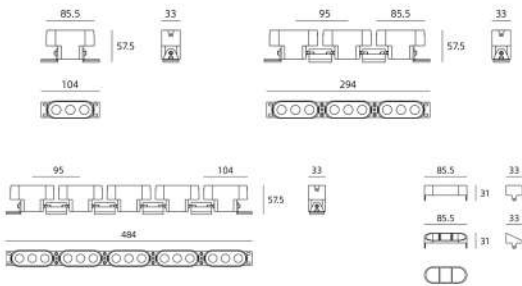

SPECIFICATIONS	
Model No.	FLEXLUX
Input Voltage	DC 24V
Power	5W 3*5W 5*5W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	5W - 104*33*H57.5mm
	3*5W - 294*33*H57.5mm
	5*5W - 484*33*H57.5mm
Led Type	SMD
Led Brand	Bridgelux
Driver Brand	24V Driver Extra

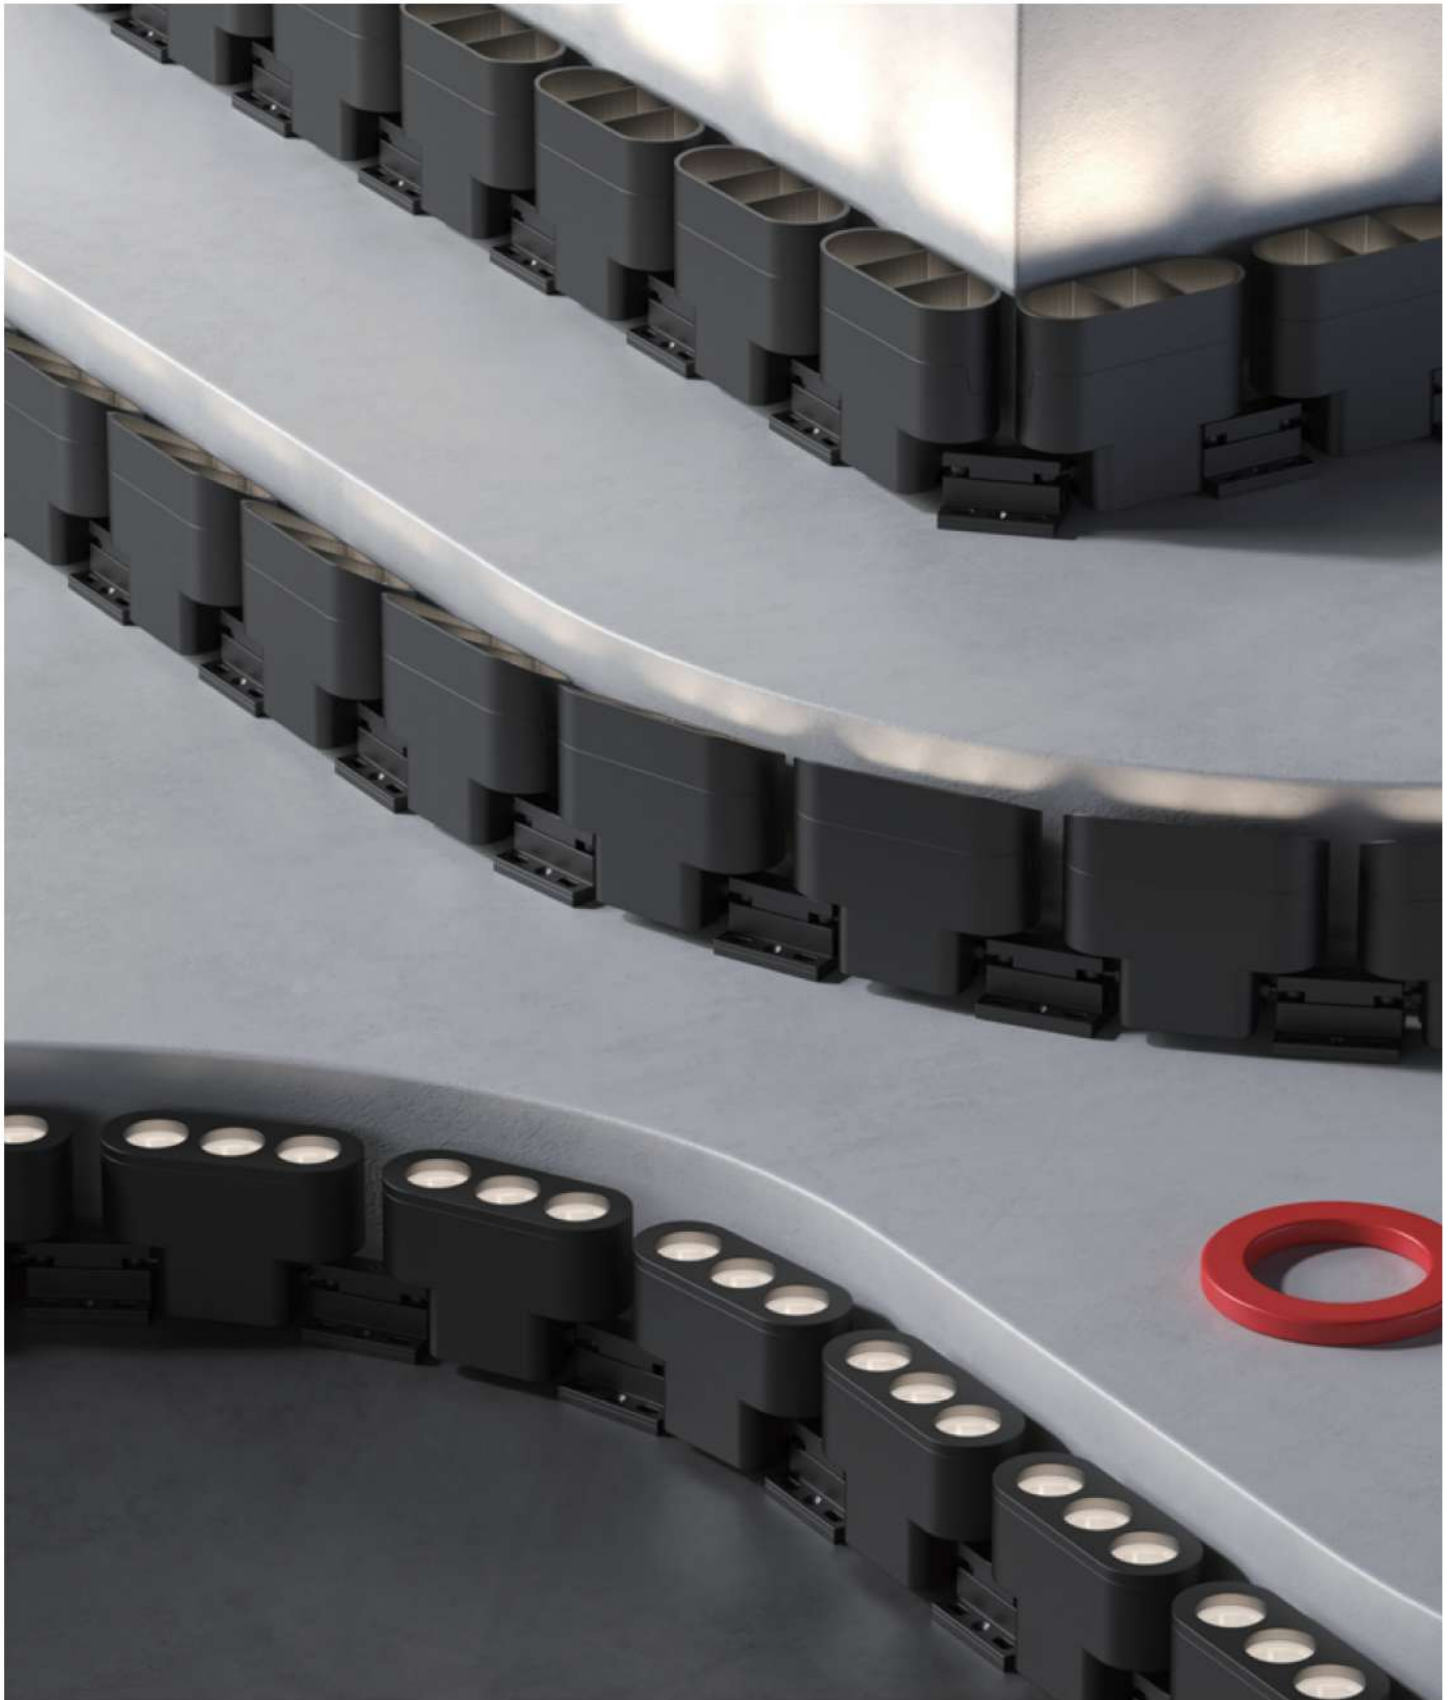

PRISHA
ILLUMINATION




TECHNOLOGY
OUTDOOR

SPYDOT

Controllable

On / Off
 0 - 10V
 Dali
 DMX 512
 Casambi



SDCM

2 Step / 3 Step

Life Time

> 30,000h - L90 - B10 (Ta 25°C)


Colour Rendering Index

90 95 98

Beam Angle



Color Temperature [CCT]

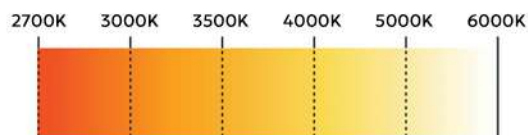

Lamp Cup Colour


 Matt Black
 Matt White

Finishing

☐ Matt White
☒ Matt Black

Fabrication Method

Precision Machined Parts

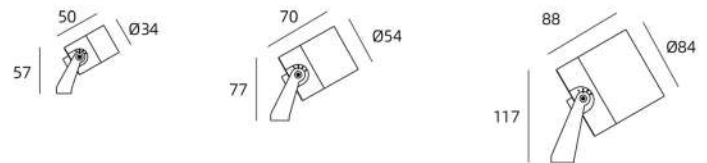


SPECIFICATIONS

Model No.	SPYDOT
Input Voltage	DC 24V
Power	5W 8W 12W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	5W - Ø34*50*H57mm
	8W - Ø54*70*H77mm
	12W - Ø84*88*H117mm
Led Type	COB
Led Brand	Citizen
Driver Brand	24V Driver Extra

AXILUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step

Life Time

> 30,000h - L90 - B10 (Ta 25°C)

Colour Rendering Index

90


95

98

Beam Angle



Color Temperature [CCT]

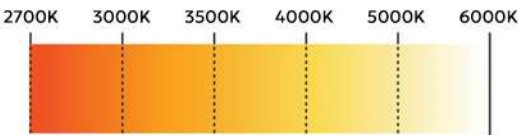

Lamp Cup Colour


- Matt Black
- Matt White

Finishing

- Matt White
- Matt Black
- As per Image

Fabrication Method

Precision Machined Parts

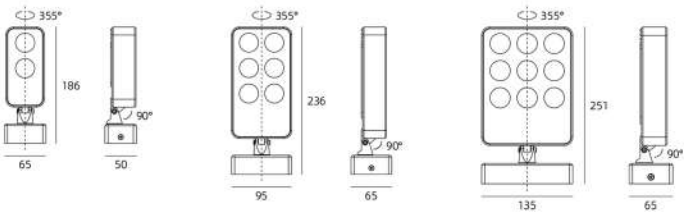


SPECIFICATIONS	
Model No.	AXILUX
Input Voltage	AC 220V
Power	6W 15W 25W
Material	Aluminum
Lamp Size	6W - 65*50*186mm
	15W - 95*65*236mm
	25W - 135*65*251mm
Led Type	SMD
Led Brand	Bridgelux




WALLVO



Wall Mounting




Vertical Mounting

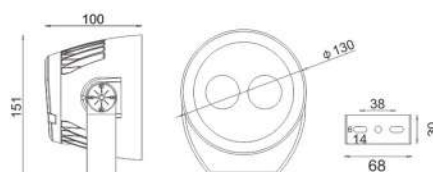

SPECIFICATIONS

Product Code	WALLVO	
LED Brand	OSRAM (SMD)	OSRAM RGBW (SMD)
Rated Power	25W (12 PCS) / 48W (24 PCS)	48W (12 PCS) / 72W (24 PCS)
Input Voltage	AC 100 - 277V / DC24V	DC24V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K / 4000K / 6500K)
Beam Angle	2.5° 5° 15° 25° 35° 45° 60°	12° 25° 45° 60°
Control Mode	On / Off	DMX512
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

SMD

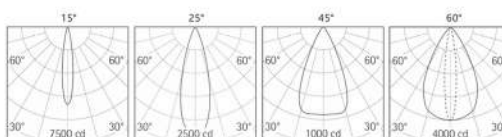


OPTICAL CONTROLLING ACCESSORIES




WALLVO



Wall Mounting




Vertical Mounting

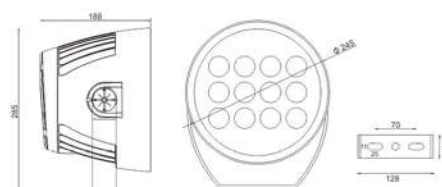

SPECIFICATIONS

Product Code	WALLVO	
LED Brand	OSRAM (SMD)	OSRAM RGBW (SMD)
Rated Power	100W (48 PCS) / 250W (108 x 2W)	150W (48 PCS) / 350W (36 x 10W)
Input Voltage	AC 100 - 277V / DC24V	DC24V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K/4000K/6500K)
Beam Angle	2.5° 15° 25° 35° 45° 60°	12° 25° 45° 60°
Control Mode	On / Off	DMX512
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

SMD

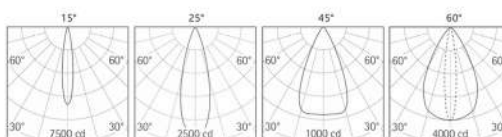


OPTICAL CONTROLLING ACCESSORIES






4WARD



4WARD - 15W



4WARD - 25W



4WARD - 45W

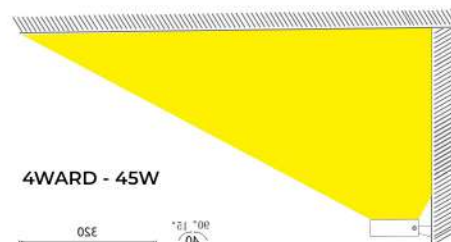

Wall Mounting




SPECIFICATIONS

Product Code	4WARD		
LED Brand	CREE (COB)	CREE (COB)	CREE (COB)
Rated Power	15W (1 * 15W)	25W (2 * 10W)	45W (4 * 10W)
Input Voltage	AC 100 - 277V	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	50 / 60Hz	50 / 60Hz
Colour	3000K	3000K	3000K
Beam Angle	45° * 90°	45° * 90°	45° * 90°
Control Mode	On / Off	On / Off	On / Off
Life	50000H	50000H	50000H
Protection Grade	Ip65	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C	-20° C - +45°C

(LED colour also available on request 2700K, 4000K, 6500K)


BINOCS

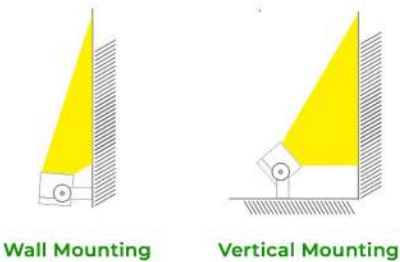

SPECIFICATIONS

Product Code	BINOCS	
LED Brand	CREE (SMD)	CREE (COB)
Rated Power	120W (54 PCS)	160W (3 PCS)
Input Voltage	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	/
Colour	3000K (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K/4000K/6500K)
Beam Angle	5° 15° 25° 30° 45° 60°	15° 24° 38°
Control Mode	On / Off	On / Off
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

SMD

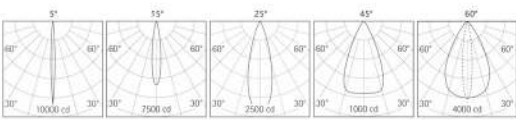


OPTICAL CONTROLLING ACCESSORIES






WINLINE

XH-31107B




XH-31107A

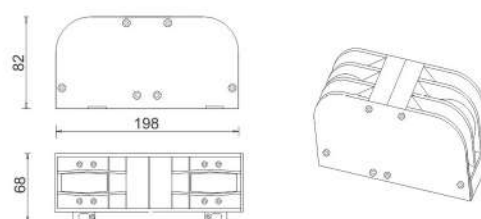


SPECIFICATIONS

Product Code	WINLINE	
LED Brand	OSRAM (SMD)	OSRAM (SMD)
Rated Power	6 W (3 PCS)	12 W (6 PCS)
Input Voltage	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	3000k (On Request - 2700k, 4000k, 6500k)
Beam Angle	5 * 160°	5 * 160°
Control Mode	On / Off	On / Off
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

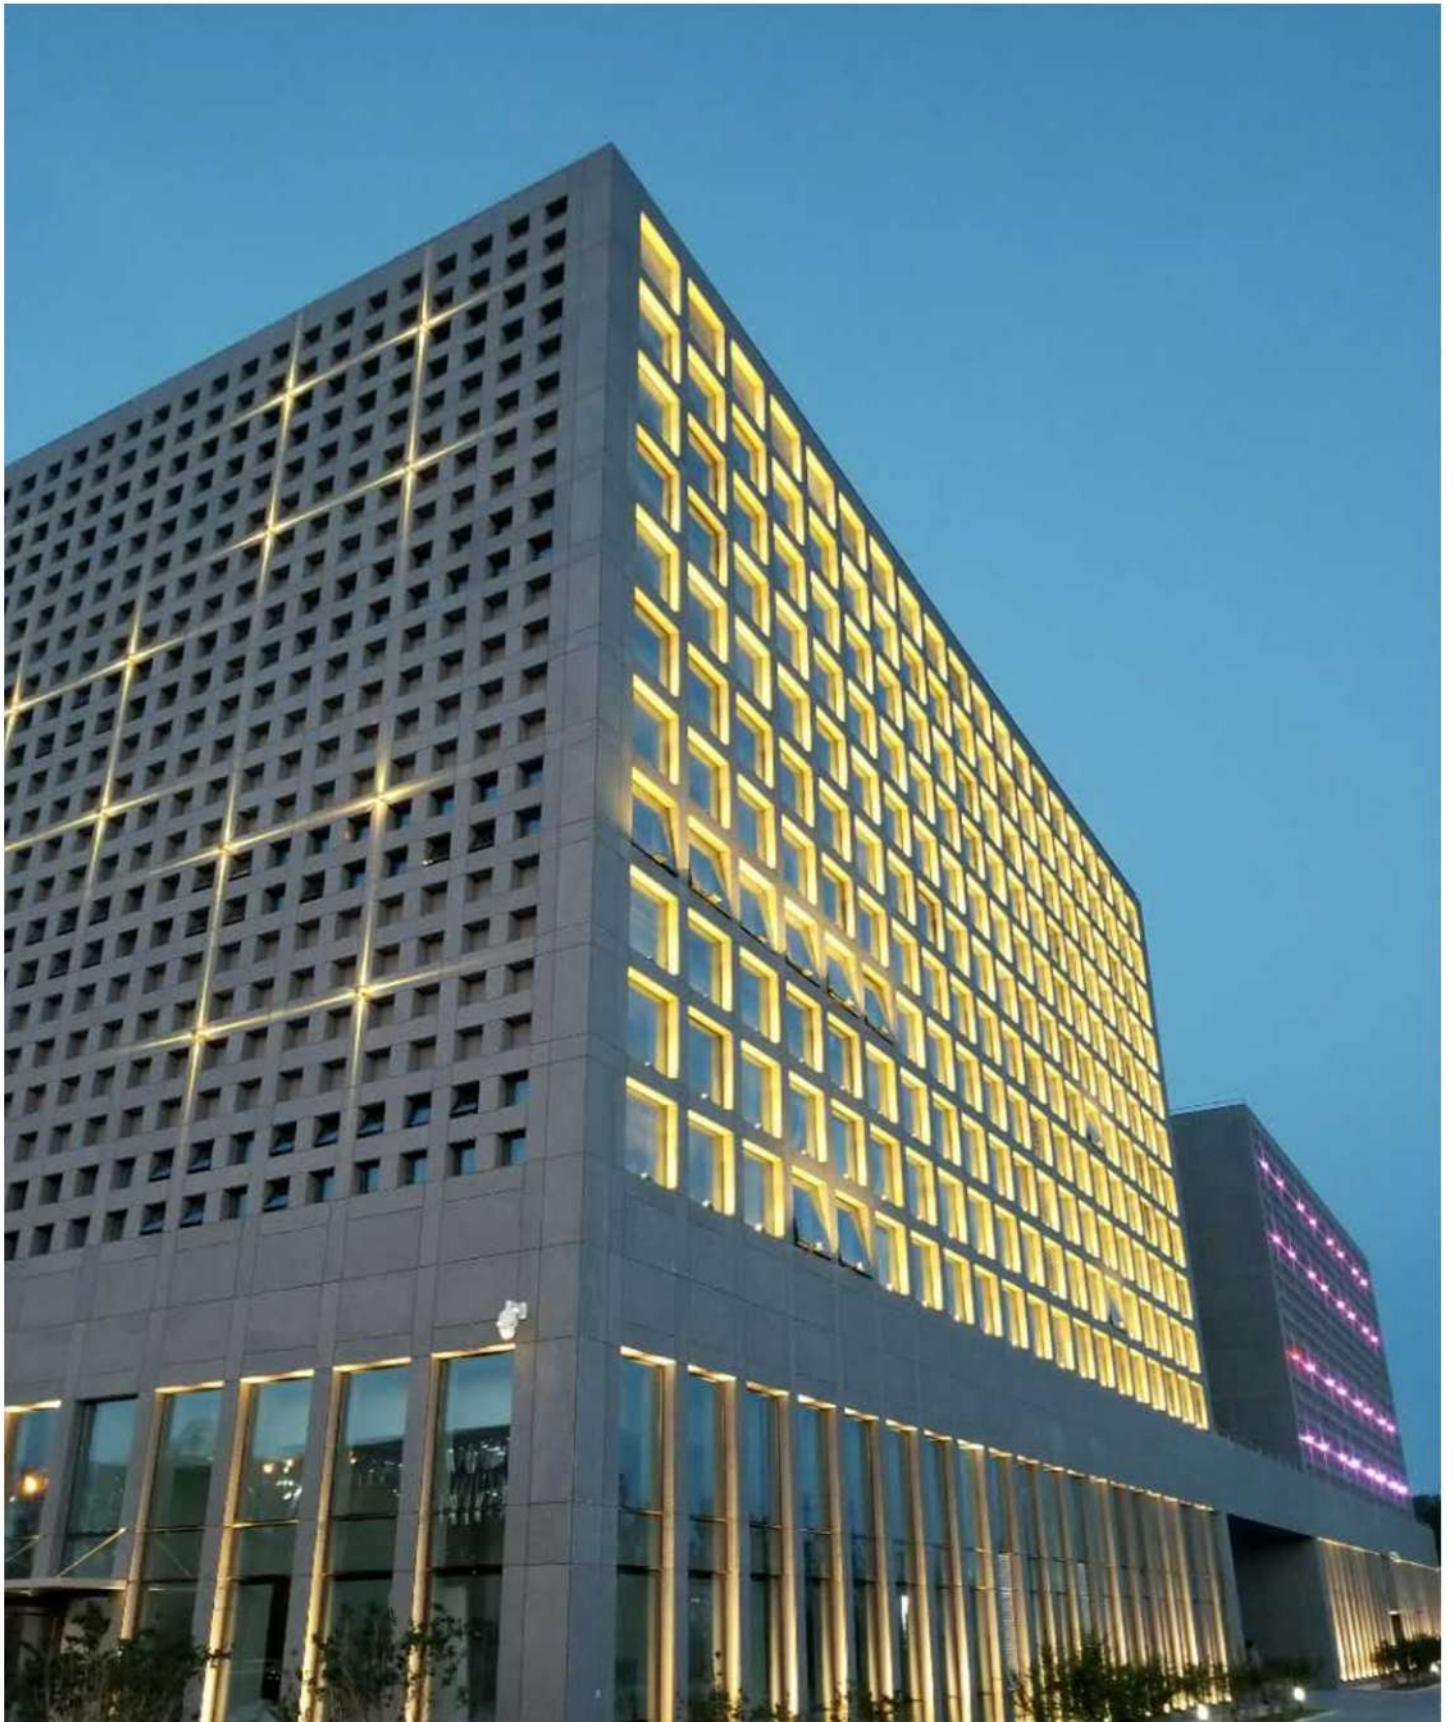

LUMIROD

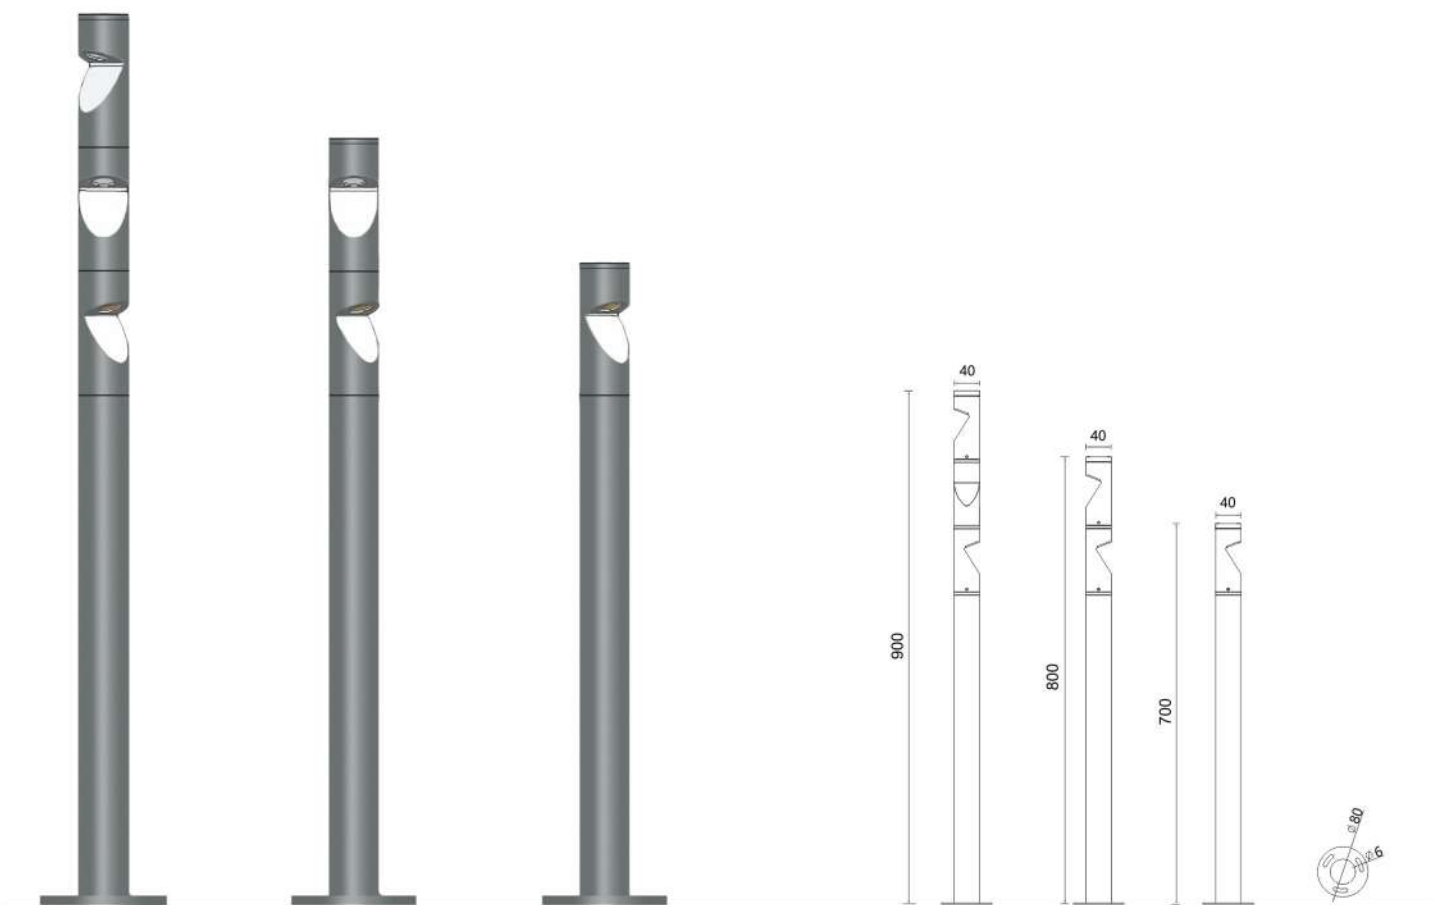

SPECIFICATIONS

Product Code	LUMIROD
LED Brand	CREE
Rated Power	3W (1 *3W) 6W (2 * 3W) 9W (3 * 3W)
Input Voltage	AC 100 - 277V
Frequency Range	50Hz / 60Hz
Colour	3000K (On Request Available - 2700k, 4000k, 6500k)
Beam Angle	90°
Control Mode	On / Off
Life	50000H
Protection Grade	Ip65
Ambient Temperature	-20° C - +45°C



Marketed by:

LIGHT | *INSIDE PVT LTD.*

FF-1/2, Maruti Arcade, Shivranjani Cross Road, Satellite, Ahmedabad-380015.

Call : +91 87585 28782 | +91 98254 31492

E-mail : prishaillumination@lightinside.in | dhaval@prishaillumination.com

Website : www.prishaillumination.com