


PRODUCT RANGE

**20
26**

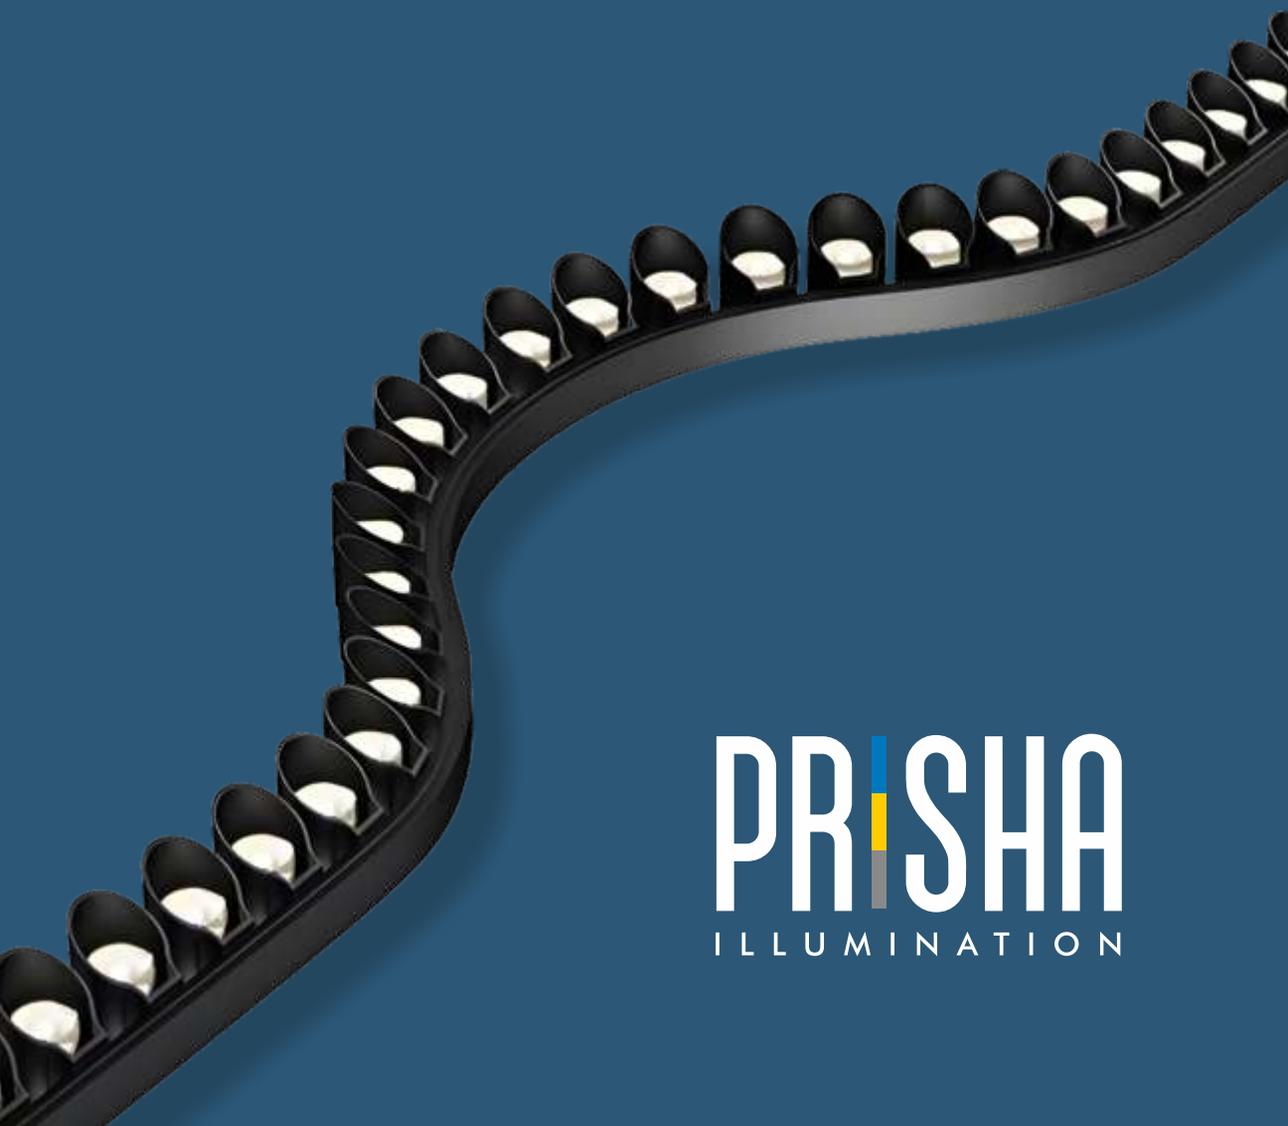

PRISHA
ILLUMINATION

WE DESIGN

WE CUSTOMISE

WE PERFORM



LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha Illumination isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha Illumination caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha Illumination to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha Illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.

PRIVE INDOOR

(PREMIUM ARCHITECTURAL RANGE)



Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 1 to 29

PRIME INDOOR

(PROJECT & ECO RANG)



Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 30 to 59

PRIVE OUTDOOR

(PREMIUM ARCHITECTURAL RANGE)

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 60 to 73



PRIME OUTDOOR

(PROJECT & ECO RANG)

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 74 to 102

Fundamental of Lighting - Part 1

Lighting Types

Understanding Diverse Applications

Ambient Lighting

Provides general illumination for an entire area, acting as the primary light source. Examples include ceiling-mounted fixtures and recessed lights.

Task Lighting

Offers focused illumination for specific activities like reading, cooking, or working. Desk lamps, under-cabinet lights, and adjustable floor lamps are common examples.

Accent Lighting

Highlights specific objects, architectural features, or areas, adding depth and drama. Utilises spotlights on artwork, wall grazers, or narrow beam luminaires.

Decorative Lighting

Primarily aesthetic, these fixtures contribute to the room's design rather than just providing light. Chandeliers, pendant lights, and sconces fall into this category.

Natural Lighting

Refers to daylight or sunlight entering a space through windows, skylights, or doors. Maximising natural light can reduce energy consumption and enhance well-being.

Colour Characteristics

Decoding CCT and CRI


Correlated Colour Temperature (CCT)

CCT describes the colour appearance of light, measured in Kelvin (K). Lower values (2700K-3000K) : Emit a warm white light with a yellowish hue, ideal for creating cosy and inviting atmospheres in residential or hospitality settings. Higher values (5000K-6500K): Produce a cool white or daylight appearance, often with a bluish tint, preferred for commercial spaces, offices, or areas requiring high alertness and visual clarity.

Colour Rendering Index (CRI)

CRI measures how accurately a light source displays colours compared to natural light, on a scale of 0-100. 80+ CRI: Considered good for general applications, ensuring reasonable colour accuracy. 90+ CRI: Essential for tasks requiring precise colour rendition, such as retail displays, art galleries, or medical facilities, as it renders colours vibrantly and faithfully.


PRIVE INDOOR SERIES

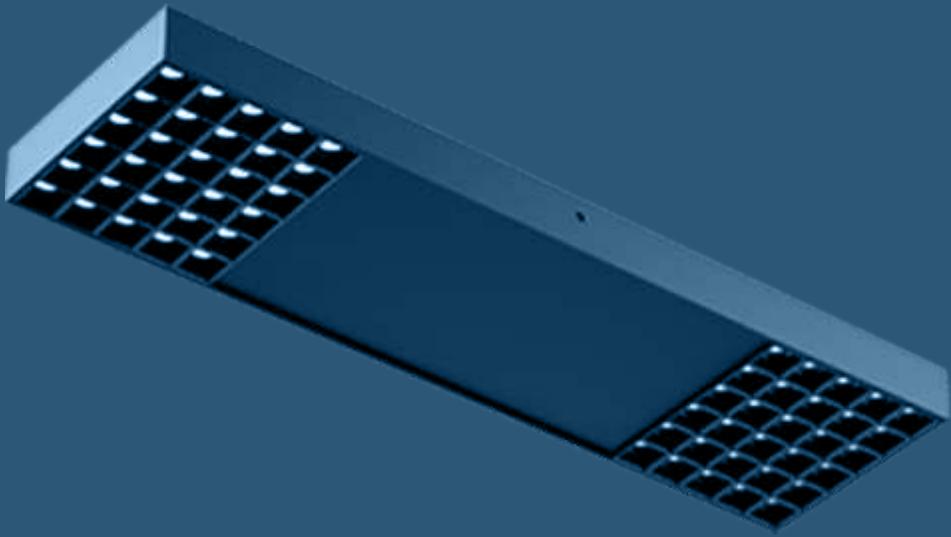


Available in : • CCT T & D • DT6 • DT8

PRODUCT DESCRIPTION**PRODUCT**



FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 24 x 51 x 1000

**PL15 - S1000**



FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 24 x 51 x 2000

**PL15 - S2000**

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 MOUNTING : RECESSED
 DIMENSION : 60 x 51 x 1000
 CUT-OUT : 24MM

**PL15 - R1000**

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 MOUNTING : RECESSED
 DIMENSION : 60 x 51 x 2000
 CUT-OUT : 24MM

**PL15 - R2000**

PRODUCT DESCRIPTION

PRODUCT

PL15 - M1



Hanging Accessories

PL15 - M2 (4 Wire)



Power Cord

PL15 - M3



Corner Connector

PL15 - M4



Straight Connector

PL15 - M5



Track Joiner Plate

PL15 - M6



Surface Joiner (L)

PL15 - M7



Recessed Joiner (L)


PL15 - M8



Ceiling to Wall Recessed Joiner

PL15 - 80W - 48V (2 Wires)

L : 260 MM
W : 15 MM



Power Supply (Driver)

PL15 - 150W - 48V (2 Wires/4 Wires)

L : 300 MM
W : 15 MM



Power Supply (Driver)

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|-------------------------------------|
| WATTS | : 6W ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L118 x W15 x H42 |
| LUMENS | : 600Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A1**

| | |
|-------------------|-------------------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L232 x W15 x H42 |
| LUMENS | : 1200Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A2**

| | |
|-------------------|-------------------------------------|
| WATTS | : 10W ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L300 x W15 x H22 |
| LUMENS | : 900Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A3**

| | |
|-------------------|-------------------------------------|
| WATTS | : 20W ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L600 x W15 x H25 |
| LUMENS | : 1800Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A4**

| | |
|-------------------|-------------------------------------|
| WATTS | : 7W ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 35 x 80 |
| LUMENS | : 770Lm |
| POWERED BY | : BRIDGELUX |
| INPUT | : 48V DRIVER |

**PL15 - A5**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|-------------------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 45 x 100 |
| LUMENS | : 1320Lm |
| POWERED BY | : BRIDGELUX |
| INPUT | : 48V DRIVER |

**PL15 - A6**

| | |
|-------------------|-------------------------------------|
| WATTS | : 6W ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L118 x W15 x H100 |
| LUMENS | : 600Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A7**

| | |
|-------------------|-------------------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : L232 x W15 x H100 |
| LUMENS | : 1200Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A8**

| | |
|-------------------|-------------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 25 x 300 |
| LUMENS | : 700Lm |
| POWERED BY | : BRIDGLUX |
| INPUT | : 48V DRIVER |

**PL15 - A9**

| | |
|-------------------|-------------------------------------|
| WATTS | : 22W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 27 x 600 |
| LUMENS | : 1980Lm |
| POWERED BY | : OSRAM |
| INPUT | : 48V DRIVER |

**PL15 - A10**

PRODUCT DESCRIPTION**PRODUCT**

MOUNTING : SURFACE MOUNTED
 FINISH : SAND BLACK
 DIMENSION : 455 X 15 X 15 MM
 IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR COCK 1

MOUNTING : SURFACE MOUNTED
 FINISH : SAND BLACK
 DIMENSION : 955 X 15 X 15 MM
 IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR COCK 2

MOUNTING : BUCKLE
 FINISH : ALLUMINIUM + PC
 DIMENSION : 55 X 12 X 12 MM
 IP : IP20



**STRAIGHT CONNECTOR
(FOR COCK TRACK)**

MOUNTING : BUCKLE (USE IN SHOWCASE)
 MATERIAL : PC
 SENSOR : GESTURE CONTROL SENSOR
 IP : IP20
 DIMENSION : 64 X 10 X 12 MM



PRR SENSE 1

MOUNTING : BUCKLE (USE IN WARDROBE)
 MATERIAL : PC
 SENSOR : DOOR CONTROL SENSOR
 IP : IP20
 DIMENSION : 36 X 14 X 14 MM



PRR SENSE 2

PRODUCT DESCRIPTION


PRODUCT

| | |
|-------------------|-----------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : SAND BLACK ALUMINIUM + PC |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K |
| CRI | : RA>80 |
| LUMEN | : 240Lm |
| DIMENSION | : 28 X 50 X 55 |
| MOUNTING | : BUCKLE |
| POWERED BY | : OSRAM |




PRR TAIL 1

| | |
|------------|------------------|
| WATTS | : 6W |
| FINISH | : SAND BLACK |
| MATERIAL | : ALUMINIUM + PC |
| BEAM ANGLE | : 90° |
| CCT(K) | : 3000K |
| CRI | : Ra>80 |
| LUMEN | : 40LM |
| IP | : Ip20 |
| DIMENSION | : 12x10x249MM |
| MOUNTING | : BUCKLE |
| POWERED BY | : BRIDGELUX SMD |

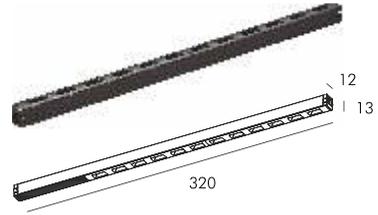

PRR TAIL 2 (NEW)

| | |
|------------|------------------|
| WATTS | : 5W |
| FINISH | : SAND BLACK |
| MATERIAL | : ALUMINIUM + PC |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K |
| CRI | : Ra>80 |
| LUMEN | : 30LM |
| IP | : IP20 |
| DIMENSION | : 12x10x249MM |
| MOUNTING | : BUCKLE |
| POWERED BY | : Bridgelux SMD |



PRR TAIL 3 (NEW)

| | |
|------------|------------------|
| WATTS | : 5W |
| FINISH | : SAND BLACK |
| MATERIAL | : ALUMINIUM + PC |
| BEAM ANGLE | : 120° + Ø10° |
| CCT(K) | : 3000K |
| CRI | : Ra>80 |
| LUMEN | : 55LM |
| IP | : IP20 |
| DIMENSION | : 20.5x15x249MM |
| MOUNTING | : BUCKLE |
| POWERED BY | : Bridgelux |



PRR TAIL 4

| | |
|-------------------|--------------------|
| WATTS | : 6 x 1.5 W = 9W |
| FINISH | : SAND BLACK |
| MATERIAL | : ALUMINIUM + PC |
| BEAM ANGLE | : 30° |
| CCT(K) | : 3000K |
| CRI | : Ra>90 |
| LUMEN | : 810LM |
| IP | : IP20 |
| DIMENSION (Outer) | : 105 x 16 x 43 MM |
| DIMENSION (Inner) | : 79 x 12 x 15 MM |
| MOUNTING | : BUCKLE |
| POWERED BY | : Bridgelux |



PRR TAIL 5



| | |
|-------------------|----------------------------------|
| WATTS | : 5W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 15-45° (Adjustable) |
| CCT(K) | : 3000K |
| LUMEN | : 400LM |
| IP | : IP20 |
| DIMENSION | : 56 x 44 x 110MM |
| CUT-OUT | : 35MM |
| MOUNTING | : RECESSED |
| INPUT | : 24V Driver not Included |
| POWERED BY | : OSRAM |



PRR CABY 1

| | |
|------------|----------------------------------|
| WATTS | : 5W |
| FINISH | : SAND BLACK |
| MATERIAL | : ALUMINIUM |
| BEAM ANGLE | : 15-45° (Adjustable) |
| CCT(K) | : 3000K |
| LUMEN | : 400LM |
| IP | : IP20 |
| DIMENSION | : 99 x 56 x 233MM |
| MOUNTING | : RECESSED |
| INPUT | : 24V Driver not Included |
| POWERED BY | : OSRAM |



PRR CABY 2

PRODUCT DESCRIPTION

PRODUCT

WATTS : 2W
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 24°
 CCT(K) : 3000K, 4000K
 LUMEN : 180LM
 IP : IP20
 DIMENSION : 56 x 44 x 27.5 MM
 CUT-OUT : 35MM
 MOUNTING : RECESSED
 INPUT : **24V Driver not Included**
 POWERED BY : OSRAM



PRR CABY 3

WATTS : 2W
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 24°
 CCT(K) : 3000K, 4000K
 LUMEN : 180LM
 IP : IP20
 DIMENSION : D 34 x 16 MM
 MOUNTING : SURFACE
 INPUT : **24V Driver not Included**
 POWERED BY : OSRAM



PRR CABY 4

WATTS : 10W
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 38°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 85
 DIMENSION : Ø 48 X H 120 MM
 LUMENS : 1050Lm
 POWERED BY : BRIDGELUX



PRE FLOCK 1B

WATTS : 25W
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 10° V x 65° H
 CCT(K) : 3000K
 CRI : Ra>90
 LUMEN : 2500LM
 IP : IP20
 DIMENSION : 643 x 92 x 72 MM
 MOUNTING : RECESSED
 CUT-OUT : 620 x 80 MM
 POWERED BY : BRIDGELUX



PRR WASH 1B

WATTS : 25W
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 10° V x 65° H
 CCT(K) : 3000K
 CRI : Ra>90
 LUMEN : 2500LM
 IP : IP20
 DIMENSION : 643 x 38 x 71 MM
 MOUNTING : SURFACE
 POWERED BY : BRIDGELUX



PRR WASH 2B

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------|
| WATTS | : 35W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| COVERAGE | : 3 MTR. X 7 MTR. |
| CCT(K) | : 3000K |
| CRI | : Ra>90 |
| LUMEN | : 3500LM |
| IP | : IP20 |
| DIMENSION | : 186 x 60 x 178 MM |
| MOUNTING | : SURFACE |
| POWERED BY | : BRIDGELUX |

**PRR WASHER**

| | |
|-------------------|------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : MATT WHITE |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 20 X H 71 MM |
| CUT-OUT | : Ø 18 MM |
| LUMENS | : 270Lm |
| POWER FACTOR | : ≥ 0.5 |
| POWERED BY | : BRIDGELUX |

**PRR FLASH 1A**

| | |
|-------------------|------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : MATT BLACK |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 20 X H 71 MM |
| CUT-OUT | : Ø 18 MM |
| LUMENS | : 270Lm |
| POWER FACTOR | : ≥ 0.5 |
| POWERED BY | : BRIDGELUX |

**PRR FLASH 1B**

| | |
|-------------------|------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : NICKEL BLACK |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 20 X H 71 MM |
| CUT-OUT | : Ø 18 MM |
| LUMENS | : 270Lm |
| POWER FACTOR | : ≥ 0.5 |
| POWERED BY | : BRIDGELUX |

**PRR FLASH 1C**

| | |
|-------------------|------------------|
| WATTS | : 5W |
| FINISH & MATERIAL | : MATT WHITE |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 29 X H 63 MM |
| CUT-OUT | : Ø 25 MM |
| LUMENS | : 450Lm |
| POWER FACTOR | : ≥ 0.5 |
| POWERED BY | : BRIDGELUX |

**PRR FLASH 2A**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 5W
 FINISH & MATERIAL : MATT BLACK
 BEAM ANGLE : 24°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 29 X H 63 MM
 CUT-OUT : Ø 25 MM
 LUMENS : 450Lm
 POWER FACTOR : ≥ 0.5
 POWERED BY : BRIDGELUX



PRR FLASH 2B

WATTS : 5W
 FINISH & MATERIAL : NICKEL BLACK
 BEAM ANGLE : 24°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 29 X H 63 MM
 CUT-OUT : Ø 25 MM
 LUMENS : 450Lm
 POWER FACTOR : ≥ 0.5
 POWERED BY : BRIDGELUX



PRR FLASH 2C

WATTS : 7W
 MATERIAL : SAND WHITE + SMOKY GREY GLASS
 BEAM ANGLE : 24°
 CCT(K) : 3000K
 CRI : ≥ 90
 DIMENSION : 42 x 103 H MM
 GLASS DIMENSION : 30 x 41 MM
 CUT-OUT : Ø 35 MM
 LUMENS : 630Lm



PRR GLASSO

WATTS : 6W ● ● ●
 FINISH & MATERIAL : MATT WHITE + ALUMINIUM
 REFLECTOR : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)
 BEAM ANGLE : 15° / 24° / 36° / 50°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 50 X H 65 MM
 CUT-OUT : Ø 45 MM
 LUMENS : 750Lm
 POWERED BY : LUMINUS
USP : FRONT OPENABLE




PRR WESTOR 1A

WATTS : 6W ● ● ●
 FINISH & MATERIAL : MATT BLACK + ALUMINIUM
 REFLECTOR : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)
 BEAM ANGLE : 15° / 24° / 36° / 50°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 50 X H 65 MM
 CUT-OUT : Ø 45 MM
 LUMENS : 750Lm
 POWERED BY : LUMINUS
USP : FRONT OPENABLE



PRR WESTOR 1B

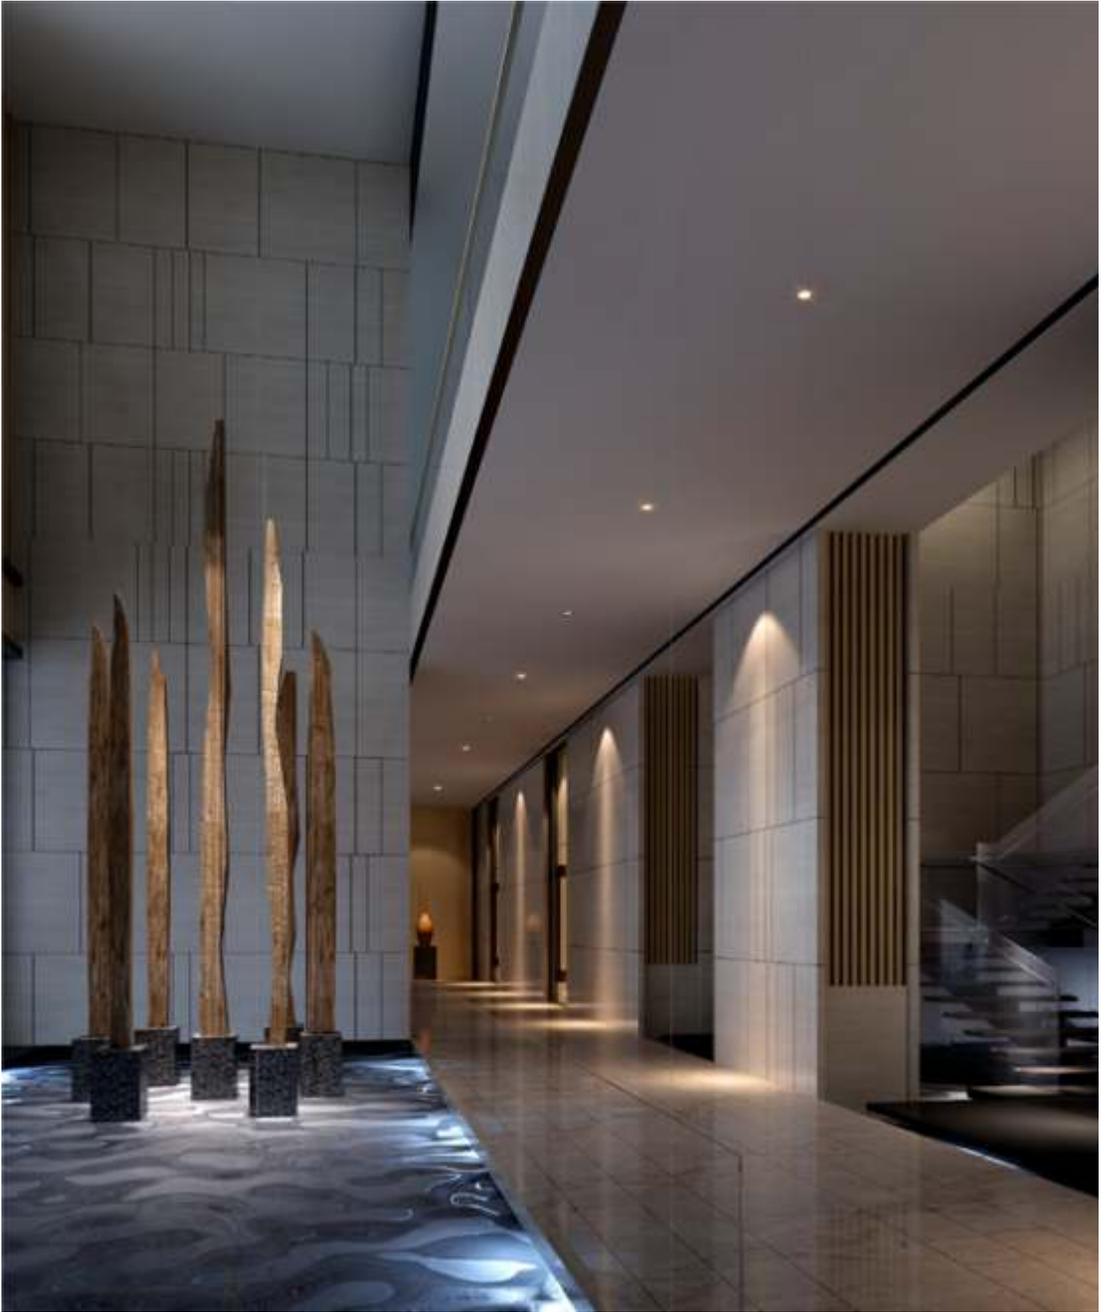

PRODUCT DESCRIPTION

PRODUCT

WATTS : 10W ● ● ●
 FINISH & MATERIAL : MATT WHITE + ALUMINIUM
 REFLECTOR : NICKEL BLACK / WHITE / BLACK /
 CHROME / FRENCH GOLD (GLARELESS)
 BEAM ANGLE : 15° / 24° / 36° / 50°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 50 X H 105 MM
 CUT-OUT : Ø 45 MM
 LUMENS : 1250Lm
 POWERED BY : LUMINUS
USP : FRONT OPENABLE



PRR WESTOR 2A

WATTS : 10W ● ● ●
 FINISH & MATERIAL : MATT BLACK + ALUMINIUM
 REFLECTOR : NICKEL BLACK / WHITE / BLACK /
 CHROME / FRENCH GOLD (GLARELESS)
 BEAM ANGLE : 15° / 24° / 36° / 50°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 50 X H 105 MM
 CUT-OUT : Ø 45 MM
 LUMENS : 1250Lm
 POWERED BY : LUMINUS
USP : FRONT OPENABLE



PRR WESTOR 2B

PRR CARTER 1A (WHITE)



Included with
WESTOR 1A & 2A

DIMENSION : Ø 50 X H 18 MM
 CUT-OUT : Ø 45 MM

PRR CARTER 1B (BLACK)



Included with
WESTOR 1B & 2B

DIMENSION : Ø 50 X H 18 MM
 CUT-OUT : Ø 45 MM

PRR CARTER 2A (WHITE)



DIMENSION : Ø 60 X H 18 MM
 CUT-OUT : Ø 55 MM

PRR CARTER 2B (BLACK)



DIMENSION : Ø 60 X H 18 MM
 CUT-OUT : Ø 55 MM

PRR CARTER 3A (TRIMLESS)




DIMENSION : Ø 60 X H 10 MM
 CUT-OUT : Ø 45 MM

PRR CARTER 3B (TRIMLESS)




DIMENSION : Ø 60 X H 10 MM
 CUT-OUT : Ø 45 MM

PRR CARTER 4A (WHITE)



DIMENSION : 60 X 60 X H 17 MM
 CUT-OUT : 55 X 55 MM

PRR CARTER 4B (BLACK)



DIMENSION : 60 X 60 X H 17 MM
 CUT-OUT : 55 X 55 MM

PRR CARTER 5A (WHITE)



DIMENSION : 112 X 61 X H 25 MM
 CUT-OUT : 105 X 55 MM

PRR CARTER 5B (BLACK)



DIMENSION : 112 X 61 X H 25 MM
 CUT-OUT : 105 X 55 MM

PRR CARTER 6A (WHITE)



DIMENSION : 162 X 61 X H 25 MM
 CUT-OUT : 105 X 55 MM

PRR CARTER 6B (BLACK)



DIMENSION : 162 X 61 X H 25 MM
 CUT-OUT : 105 X 55 MM

PRR CARTER 7A (WHITE)



DIMENSION : 112 X 112 X H 25 MM
 CUT-OUT : 105 X 105 MM

PRR CARTER 7B (BLACK)



DIMENSION : 112 X 112 X H 25 MM
 CUT-OUT : 105 X 105 MM

PRR CARTER 8A (WHITE)



DIMENSION : 262 X 61 X H 25 MM
 CUT-OUT : 205 X 55 MM

PRR CARTER 8B (BLACK)



DIMENSION : 262 X 61 X H 25 MM
 CUT-OUT : 205 X 55 MM

PRODUCT DESCRIPTION**PRODUCT**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 15W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM | |
| REFLECTOR | : NICKEL BLACK / WHITE / BLACK | |
| BEAM ANGLE | : 24° / 36° / 50° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 90 | |
| DIMENSION | : Ø 61 X H 125 MM | |
| CUT-OUT | : Ø 55 MM | |
| LUMENS | : 1875Lm | |
| POWERED BY | : LUMINUS | |

**PRR EASTER 1A**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 15W | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK + ALUMINIUM | |
| REFLECTOR | : NICKEL BLACK / WHITE / BLACK | |
| BEAM ANGLE | : 24° / 36° / 50° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 90 | |
| DIMENSION | : Ø 61 X H 125 MM | |
| CUT-OUT | : Ø 55 MM | |
| LUMENS | : 1875Lm | |
| POWERED BY | : LUMINUS | |

**PRR EASTER 1B**

| | | |
|-------------------|--------------------------|-------|
| WATTS | : 15W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM | |
| BEAM ANGLE | : 24° / 36° / 50° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 90 | |
| DIMENSION | : Ø 61 X H 125 MM | |
| CUT-OUT | : Ø 55 MM | |
| LUMENS | : 1875Lm | |
| POWERED BY | : LUMINUS | |

**PRR CARBON 1A**

| | | |
|-------------------|--------------------------|-------|
| WATTS | : 15W | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK + ALUMINIUM | |
| BEAM ANGLE | : 24° / 36° / 50° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 90 | |
| DIMENSION | : Ø 61 X H 125 MM | |
| CUT-OUT | : Ø 55 MM | |
| LUMENS | : 1875Lm | |
| POWERED BY | : LUMINUS | |

**PRR CARBON 1B**

| | | |
|-------------------|--------------------------|-------|
| WATTS | : 25W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM | |
| REFLECTOR | : NICKEL BLACK | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 90 | |
| DIMENSION | : Ø 81 X H 145 MM | |
| CUT-OUT | : Ø 75 MM | |
| LUMENS | : 3125Lm | |
| POWERED BY | : LUMINUS | |

**PRR EASTER 2A**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 10W ● ● ●
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 REFLECTOR : SHINE BLACK / CHROME (GLARELESS)
 BEAM ANGLE : 15° OR 36°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : 72 x 76 H MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR GLEAM 1A

WATTS : 10W ● ● ●
 FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 REFLECTOR : SHINE BLACK / CHROME (GLARELESS)
 BEAM ANGLE : 15° OR 36°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : 72 x 76 H MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR GLEAM 1B

WATTS : 15W ● ● ●
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 REFLECTOR : SHINE BLACK / CHROME (GLARELESS)
 BEAM ANGLE : 15° OR 36°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : 88 x 88 H MM
 CUT-OUT : Ø 80 MM
 LUMENS : 1800Lm
 POWERED BY : CREE
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR GLEAM 2A

WATTS : 15W ● ● ●
 FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 REFLECTOR : SHINE BLACK / CHROME (GLARELESS)
 BEAM ANGLE : 15° OR 36°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : 88 x 88 H MM
 CUT-OUT : Ø 80 MM
 LUMENS : 1800Lm
 POWERED BY : CREE
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR GLEAM 2B

WATTS : 10W ● ● ●
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 REFLECTOR : SHINE BLACK (GLARELESS)
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : 86 x 76 H MM
 CUT-OUT : Ø 55 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR GLASPEN 1A

PRODUCT DESCRIPTION

PRODUCT

| | |
|-------------------|---------------------------|
| WATTS | : 15W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| REFLECTOR | : SHINE BLACK (GLARELESS) |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K |
| CRI | : ≥ 90 |
| DIMENSION | : 108 x 95 H MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| DRIVER(ON/OFF) | : FULHAM OR EQUIVALENT |



PRR GLASPEN 2A

| | |
|----------------|--|
| WATTS | : 8W Adjustable ● ● ● |
| MATERIAL | : MATT WHITE & BLACK & ALUMINIUM |
| REFLECTOR | : MATT WHITE, MATT BLACK, CHROME & SHINE BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K |
| CRI | : ≥ 90 |
| DIMENSION | : 82 x H 46 MM |
| CUT-OUT | : Ø 75 |
| LUMENS | : 960Lm |
| POWERED BY | : CREE |
| DRIVER(ON/OFF) | : FULHAM OR EQUIVALENT |



PRR GLOW 1A / 1B

| | |
|----------------|--|
| WATTS | : 12W Adjustable ● ● ● |
| MATERIAL | : MATT WHITE & BLACK & ALUMINIUM |
| REFLECTOR | : MATT WHITE, MATT BLACK, CHROME & SHINE BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K |
| CRI | : ≥ 90 |
| DIMENSION | : 82 x H 46 MM |
| CUT-OUT | : Ø 75 |
| LUMENS | : 1440Lm |
| POWERED BY | : CREE |
| DRIVER(ON/OFF) | : FULHAM OR EQUIVALENT |



PRR GLOW 2A / 2B

| | |
|------------|-----------------------|
| WATTS | : 9W ● ● ● |
| MATERIAL | : SAND WHITE + BLACK |
| BEAM ANGLE | : 15° / 36° |
| CCT(K) | : 3000K, 4000K, 5000K |
| CRI | : ≥ 90 |
| DIMENSION | : 44 x 90 H MM |
| CUT-OUT | : Ø 40 MM |
| LUMENS | : 960Lm |
| POWERED BY | : CREE |
| DRIVER | : BAG OR EQUIVALENT |



PRR GINI 1A

| | |
|------------|-----------------------|
| WATTS | : 9W ● ● ● |
| MATERIAL | : SAND BLACK + BLACK |
| BEAM ANGLE | : 15° / 36° |
| CCT(K) | : 3000K, 4000K, 5000K |
| CRI | : ≥ 90 |
| DIMENSION | : 44 x 90 H MM |
| CUT-OUT | : Ø 40 MM |
| LUMENS | : 960Lm |
| POWERED BY | : CREE |
| DRIVER | : BAG OR EQUIVALENT |



PRR GINI 1B

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|--------------------------|
| WATTS | : 10W ● |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 147 x W 45 x H 42 MM |
| CUT-OUT | : L 142 x W 37 MM |
| LUMENS | : 900Lm |
| POWERED BY | : OSRAM |

**PRR LUMI 1B**

| | |
|------------|--------------------------|
| WATTS | : 20W ● |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 280 x W 45 x H 42 MM |
| CUT-OUT | : L 275 x W 37 MM |
| LUMENS | : 1800Lm |
| POWERED BY | : OSRAM |

**PRR LUMI 2B**

| | |
|------------|--------------------------|
| WATTS | : 9W ● |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 35 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 900Lm |
| POWERED BY | : OSRAM |

**PRR LUMI 3B**

| | |
|------------|---------------------------|
| WATTS | : 2 X 7 W ● |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 38° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 112 x W 112 x H 88 MM |
| CUT-OUT | : L 100 x W 100 MM |
| LUMENS | : 1150Lm |
| POWERED BY | : OSRAM |


**PRR RIGA 1B**

| | |
|------------|---------------------------|
| WATTS | : 4 X 7 W ● |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 38° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 194 x W 112 x H 88 MM |
| CUT-OUT | : L 180 x W 100 MM |
| LUMENS | : 2300Lm |
| POWERED BY | : OSRAM |

**PRR RIGA 2B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|----------------------------------|
| WATTS | : 3 X 2W |
| MATERIAL | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 81 x W 31 x H 50 MM |
| CUT-OUT | : L 75 x W 25 MM |
| LUMENS | : 660Lm |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-DOT 1A**

| | |
|------------|----------------------------------|
| WATTS | : 5 X 2W |
| MATERIAL | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 121 x W 31 x H 50 MM |
| CUT-OUT | : L 115 x W 25 MM |
| LUMENS | : 1100Lm |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-DOT 2A**

| | |
|------------|----------------------------------|
| WATTS | : 9 X 2W |
| MATERIAL | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 76 x W 76 x H 50 MM |
| CUT-OUT | : L 70 x W 70 MM |
| LUMENS | : 1980Lm |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-DOT 3A**

| | |
|------------|----------------------------------|
| WATTS | : 1 X 5W |
| MATERIAL | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 35° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 56 x W 56 x H 45 MM |
| CUT-OUT | : L 50 x W 50 MM |
| LUMENS | : 550Lm |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-SPOT 1A**

| | |
|------------|--------------------------|
| WATTS | : 2 X 5 W |
| MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 35° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : L 99 x W 45 x H 56 MM |
| CUT-OUT | : L 90 x W 50 MM |
| LUMENS | : 1100Lm |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-SPOT 2A**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 3 X 5 W
 MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 35°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : L 142 x W 56 x H 45 MM
 CUT-OUT : L 135 x W 50 MM
 LUMENS : 1650Lm
 POWERED BY : BRIDGELUX



PRR LINEA-SPOT 3A

WATTS : 12W ● ● ●
 FINISH : SAND WHITE + SAND WHITE
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 85 x 88 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
USP : FRONT OPENABLE



PRR DINO 1A

WATTS : 12W ● ● ●
 FINISH : SAND BLACK + SAND BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 85 x 88 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
USP : FRONT OPENABLE



PRR DINO 1B

WATTS : 12W ● ● ●
 FINISH : SAND WHITE + NICKEL BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 85 x 88 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
USP : FRONT OPENABLE



PRR DINO 1C

WATTS : 12W ● ● ●
 FINISH : SAND WHITE + SAND WHITE
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 85 x 88 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1200Lm
 POWERED BY : CREE
USP : FRONT OPENABLE



PRR ENZO 1A

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH | : SAND BLACK + SAND BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 88 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| USP | : FRONT OPENABLE |

**PRR ENZO 1B**

| | |
|------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH | : SAND WHITE + SAND WHITE |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 88 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| USP | : FRONT OPENABLE |

**PRR TITO 1A**

| | |
|------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH | : SAND BLACK + SAND BLACK |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 88 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| USP | : FRONT OPENABLE |

**PRR TITO 1B**

| | |
|------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH | : SAND WHITE + SAND WHITE |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 88 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| USP | : FRONT OPENABLE |

**PRR CANO 1A**

| | |
|------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH | : SAND BLACK + SAND BLACK |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥ 90 |
| DIMENSION | : Ø 85 x 88 MM |
| CUT-OUT | : Ø 75 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : CREE |
| USP | : FRONT OPENABLE |

**PRR CANO 1B**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 8W ● ● ●
 FINISH : WHITE
 MATERIAL : ALUMINIUM
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 62 x H 85 MM
 CUT-OUT : Ø 55 MM
 LUMENS : 840Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : FRONT OPENABLE



PRR OPTICAL 1

WATTS : 12W ● ● ●
 FINISH : WHITE
 MATERIAL : ALUMINIUM
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 84 x H 100 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1440Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : FRONT OPENABLE



PRR OPTICAL 2

WATTS : 20W ● ● ●
 FINISH : WHITE
 MATERIAL : ALUMINIUM
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 110 x H 128 MM
 CUT-OUT : Ø 95 MM
 LUMENS : 2400Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : FRONT OPENABLE



PRR OPTICAL 3

WATTS : 8W ● ● ●
 FINISH & MATERIAL : WHITE & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 62 x H 86 MM
 CUT-OUT : Ø 55 MM
 LUMENS : 840Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : FRONT OPENABLE



PRR LUXUS 1A

WATTS : 8W ● ● ●
 FINISH & MATERIAL : BLACK & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 62 x H 86 MM
 CUT-OUT : Ø 55 MM
 LUMENS : 840Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : FRONT OPENABLE



PRR LUXUS 1B

PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W ● ● ●
 FINISH & MATERIAL : WHITE & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 84 x H 104 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1440Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : **FRONT OPENABLE**
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR LUXUS 2A

WATTS : 12W ● ● ●
 FINISH & MATERIAL : BLACK & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 84 x H 104 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1440Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : **FRONT OPENABLE**
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR LUXUS 2B

WATTS : 20W
 FINISH & MATERIAL : WHITE & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 110 x H 127 MM
 CUT-OUT : Ø 95 MM
 LUMENS : 2400Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : **FRONT OPENABLE**
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR LUXUS 3A

WATTS : 20W
 FINISH & MATERIAL : BLACK & ALUMINIUM
 REFLECTOR : BLACK
 BEAM ANGLE : 15° OR 38° OR 60°
 CCT(K) : 3000K, 4000K, 5000K
 CRI : ≥ 90
 DIMENSION : Ø 110 x H 127 MM
 CUT-OUT : Ø 95 MM
 LUMENS : 2400Lm
 DRIVER : FULHAM OR EQUIVALENT
 POWER BY : CREE
USP : **FRONT OPENABLE**
 DRIVER(ON/OFF) : FULHAM OR EQUIVALENT



PRR LUXUS 3B

PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W ● ● ●
IP RATING : **IP44**
 MATERIAL : SAND WHITE + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 82 x H 62 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 960Lm
 POWERED BY : CREE



PRR MOIST 1A

WATTS : 12W ● ● ●
IP RATING : **IP44**
 MATERIAL : SAND BLACK + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K
 CRI : ≥ 90
 DIMENSION : Ø 82 x H 62 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 960Lm
 POWERED BY : CREE



PRR MOIST 1B

WATTS : 8W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : SAND WHITE & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 960Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 74 X H 99 MM
 POWERED BY : CREE



PRR NARIO 1A

WATTS : 15W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : SAND WHITE & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 1800Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 94 X H 115 MM
 POWERED BY : CREE



PRR NARIO 2A

WATTS : 8W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 960Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 74 X H 99 MM
 POWERED BY : CREE



PRR NARIO 1B

PRODUCT DESCRIPTION

PRODUCT

WATTS : 15W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 1800Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 94 X H 115 MM
 POWERED BY : CREE



PRR NARIO 2B

WATTS : 8W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : BRASS & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 960Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 74 X H 99 MM
 POWERED BY : CREE



PRR NARIO 1C

WATTS : 15W ● ● ●
IP RATING : **IP44**
 MATERIAL : ALUMINIUM
 FINISH : BRASS & BLACK INNER
 CRI : 90
 BEAM ANGLE : 15° / 36° / 55°
 LUMEN : 1800Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 94 X H 115 MM
 POWERED BY : CREE



PRR NARIO 2C

WATTS : 3W (UP) + 7W (DOWN)
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK
 CRI : 90
 BEAM ANGLE : 24°
 LUMEN : 630Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 113 X 90 MM
 POWERED BY : EPISTAR



PRR REGENT 1B

WATTS : 3W (UP) + 15W (DOWN)
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK
 CRI : 90
 BEAM ANGLE : 24°
 LUMEN : 1350Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 138 X 90 MM
 POWERED BY : EPISTAR



PRR REGENT 2B

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|-------------------------|
| WATTS | : 6W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 24° |
| LUMEN | : 500Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : L 85 X W 35 X H 65 MM |
| POWERED BY | : OSRAM |

**PRR MABEL 1B**

| | |
|------------|--------------------------|
| WATTS | : 10W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 24° |
| LUMEN | : 800Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : L 138 X W 35 X H 65 MM |
| POWERED BY | : OSRAM |

**PRR MABEL 2B**

| | |
|------------|----------------------------|
| WATTS | : 4 X 1.5 W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND WHITE & BLACK INNER |
| CRI | : 90 |
| BEAM ANGLE | : 24° |
| LUMEN | : 660Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : 200 X 28 x H 50 MM |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-LINE 1A**

| | |
|------------|----------------------------|
| WATTS | : 8 X 1.5 W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND WHITE & BLACK INNER |
| CRI | : 90 |
| BEAM ANGLE | : 24° |
| LUMEN | : 1320Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : 400 X 28 x H 50 MM |
| POWERED BY | : BRIDGELUX |

**PRR LINEA-LINE 2A**

| | |
|------------|-----------------------|
| WATTS | : 20W |
| MATERIAL | : ALUMINIUM |
| FINISH | : BLACK & BLACK INNER |
| CRI | : 90 |
| BEAM ANGLE | : 36° |
| LUMEN | : 1800Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : 340 X 113 x H 26 MM |
| POWERED BY | : CREE |

**PRR JACK 1B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|-----------------------------|
| WATTS | : 7W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 32° |
| LUMEN | : 630Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : Ø 35 X (140x1) X H 395 MM |
| POWERED BY | : CREE |

**PRR UNICO 1B**

| | |
|------------|-----------------------------|
| WATTS | : 2 X 7 W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 32° |
| LUMEN | : 1260Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : Ø 35 X (140x2) X H 430 MM |
| POWERED BY | : CREE |

**PRR UNICO 2B**

| | |
|------------|-------------------|
| WATTS | : 7W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 36° |
| LUMEN | : 630Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : Ø 64 X H 196 MM |
| POWERED BY | : CREE |

**PRR FALL 1B**

| | |
|------------|-------------------|
| WATTS | : 7W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 36° |
| LUMEN | : 630Lm |
| CCT | : 3000K, 4000K |
| DIMENSION | : Ø 64 X H 326 MM |
| POWERED BY | : CREE |

**PRR FALL 2B**

| | |
|------------|--------------------------|
| WATTS | : 10W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND BLACK |
| CRI | : 90 |
| BEAM ANGLE | : 20° X 35° (Adjustable) |
| LUMEN | : 900Lm |
| CCT | : 3000K |
| DIMENSION | : Ø 45 X H 160 MM |
| POWERED BY | : CREE |

**PRR LENS**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W
 MATERIAL : ALUMINIUM DIE-CAST
 FINISH : WHITE
 CRI : RA>90
 BEAM ANGLE : 36°
 LUMEN : 1656Lm
DIMMING : **350mA TRIAC DIMMING**
 CCT : 3000K, 4000K
 DIMENSION : 102 X H 84 MM
 ADJUST. ANGLE : LAMP HEAD 0 ~ 45° / 350°
 POWERED BY : BRIDGELUX



PRR IDO 1A

WATTS : 12W
 MATERIAL : ALUMINIUM DIE-CAST
 FINISH : BLACK
 CRI : RA>90
 BEAM ANGLE : 36°
 LUMEN : 1656Lm
DIMMING : **350mA TRIAC DIMMING**
 CCT : 3000K, 4000K
 DIMENSION : 102 X H 84 MM
 ADJUST. ANGLE : LAMP HEAD 0 ~ 45° / 350°
 POWERED BY : BRIDGELUX



PRR IDO 1B

WATTS : 5W (ASYMETRIC ANGLE)
 MATERIAL : ALUMINIUM
 FINISH : SAND WHITE + BLACK
 CRI : 90
 BEAM ANGLE : 65° + 26° ∠ 18°
 LUMEN : 310Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 56 X 56 X 70 MM
 POWERED BY : BRIDGELUX



PRR PRACO 1A

WATTS : 5W (ASYMETRIC ANGLE)
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK + BLACK
 CRI : 90
 BEAM ANGLE : 65° + 26° ∠ 18°
 LUMEN : 310Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 56 X 56 X 70 MM
 POWERED BY : BRIDGELUX



PRR PRACO 1B

WATTS : 2 X 5W (ASYMETRIC ANGLE)
 MATERIAL : ALUMINIUM
 FINISH : SAND WHITE + BLACK
 CRI : 90
 BEAM ANGLE : 65° + 26° ∠ 18°
 LUMEN : 690Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 99 X 56 X 70 MM
 POWERED BY : BRIDGELUX




PRR PRACO 2A

PRODUCT DESCRIPTION

PRODUCT

WATTS : 2 X 5W (ASYMETRIC ANGLE)
 MATERIAL : ALUMINIUM
 FINISH : SAND BLACK + BLACK
 CRI : 90
 BEAM ANGLE : 65° + 26° ∠ 18°
 LUMEN : 690Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 99 X 56 X 70 MM
 POWERED BY : BRIDGELUX



PRR PRACO 2B

WATTS : 20W
 MATERIAL : ALUMINIUM + PC
 FINISH : SAND BLACK
 CRI : 90
 BEAM ANGLE : 110°
 LUMEN : 1750Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 210 X 85 MM
 POWERED BY : OSRAM



PRR STELLA 1B

WATTS : 40W
 MATERIAL : ALUMINIUM + PC
 FINISH : SAND BLACK + GOLD
 CRI : 90
 BEAM ANGLE : 110°
 LUMEN : 4200Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 400 X 85 MM
DIMMING : **TRIAC DIMMABLE**
 POWERED BY : EVERLITE



PRR LORENZO 1B

WATTS : 60W
 MATERIAL : ALUMINIUM + PC
 FINISH : SAND BLACK + GOLD
 CRI : 90
 BEAM ANGLE : 110°
 LUMEN : 7200Lm
 CCT : 3000K, 4000K
 DIMENSION : Ø 600 X 85 MM
DIMMING : **TRIAC DIMMABLE**
 POWERED BY : EVERLITE



PRR LORENZO 2B

POWER : 33W SMD & 7W SPOT
 MATERIAL : ALUMINIUM & ACRYLIC
 FINISH : BLACK + BLACK SPOT
 CRI : RA>90
 BEAM ANGLE (SPOT) : 36°
 LUMEN : 3200Lm
 CCT : SMD 4000K & SPOT 3000K
 DIMENSION : 400 X 70 MM
 POWERED BY : CITIZEN



PRR AURA

Fundamental of Lighting - Part 2

Light Distribution Beam Angle and Optics

Beam Angle

The beam angle defines the spread of light emitted from a fixture. Narrow angles (<25°): Result in a focused beam, suitable for spotlighting specific objects or creating dramatic accent lighting. Wide angles (>60°) : Provide a broad light distribution, ideal for general illumination or floodlighting large areas, ensuring uniform coverage.

Optics

Optics are internal components (like reflectors and lenses) used to control the direction, shape, and spread of light. Their purpose is to enhance beam control, improve lighting efficiency, and reduce glare, ensuring optimal performance and visual comfort.

Precision in Lighting The Role of Lenses

A lens is a transparent optical element, usually made of glass or plastic, designed to shape or diffuse light. Lenses are critical in modern lighting fixtures for various applications:

- ✓ **Focusing Light** : Concentrates light into a narrow, intense beam, ideal for spotlights or accent lighting.
- ✓ **Spreading Light** : Diffuses light to create a broader, more uniform distribution, suitable for general illumination or floodlights.
- ✓ **Softening Light** : Reduces harshness and glare, creating a more comfortable and aesthetically pleasing light output.

PRIME INDOOR SERIES



Available in : • CCT T & D • DT6 • DT8

PRODUCT DESCRIPTION**PRODUCT**

| | | |
|-------------------|--------------------------------|-------|
| WATT | : 12W | ● ● ● |
| FINISH & MATERIAL | : WHITE/BLACK + ALUMINIUM | |
| CCT(K) | : 3000K , 4000K , 5000K, 6000K | |
| CRI | : ≥80 | |
| BEAM ANGLE | : 110° | |
| DIMENSION | : 119 X H 53 MM | |
| CUT-OUT | : Ø 110 MM | |
| LUMEN | : 1080Lm | |
| DRIVER | : PRISHA OR EQUIVALENT | |
| DRIVER XP | : BAG & EQUIVALENT | |
| POWERED BY | : BRIDGELUX | |



**PRO VEGA 1A / 1B
PRO VEGA XP 1A / 1B**

| | | |
|-------------------|--------------------------------|-------|
| WATT | : 18W | ● ● ● |
| FINISH & MATERIAL | : WHITE/BLACK + ALUMINIUM | |
| CCT(K) | : 3000K , 4000K , 5000K, 6000K | |
| CRI | : ≥80 | |
| BEAM ANGLE | : 110° | |
| DIMENSION | : 154 X H 53 MM | |
| CUT-OUT | : Ø 146 MM | |
| LUMEN | : 1620Lm | |
| DRIVER | : PRISHA OR EQUIVALENT | |
| DRIVER XP | : BAG & EQUIVALENT | |
| POWERED BY | : BRIDGELUX | |



**PRO VEGA 2A / 2B
PRO VEGA XP 2A / 2B**

| | | |
|------------|---------------------------------|--|
| WATT | : 10W | |
| MATERIAL | : ALUMINIUM | |
| FINISH | : WHITE / BLACK | |
| CCT(K) | : 3000K , 4000K , 5000K, 6000K | |
| CRI | : >80 | |
| BEAM ANGLE | : 110° | |
| DIAMENTION | : 90 MM × H 58MM | |
| CUT-OUT | : 86 MM | |
| LUMEN | : 1000Lm | |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT | |
| POWERED BY | : BRIDGELUX | |



PRE NEO 1A / 1B

| | | |
|------------|---------------------------------|--|
| WATT | : 16W | |
| MATERIAL | : ALUMINIUM | |
| FINISH | : WHITE / BLACK | |
| CCT(K) | : 3000K , 4000K , 5000K, 6000K | |
| CRI | : >80 | |
| BEAM ANGLE | : 110° | |
| DIAMENTION | : 100 MM × H 58MM | |
| CUT-OUT | : 95 MM | |
| LUMEN | : 1600Lm | |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT | |
| POWERED BY | : BRIDGELUX | |



PRE NEO 2A / 2B

| | | |
|-------------------|--------------------------|--|
| WATTS | : 7W | |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM | |
| BEAM ANGLE | : 120° | |
| CCT(K) | : 3000K, 4000K, 6000K | |
| DIMENSION | : 90 X H 30 MM | |
| CUT-OUT | : 75 MM | |
| POWERED BY | : BRIDGELUX | |



SNIP GRACE 1A (ROUND)

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------|
| WATTS | : 16W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 120 X H 30 MM |
| CUT-OUT | : 105 MM |
| POWERED BY | : BRIDGELUX |

**SNIP GRACE 2A (ROUND)**

| | |
|-------------------|--------------------------|
| WATTS | : 24W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 170 X H 30 MM |
| CUT-OUT | : 155 MM |
| POWERED BY | : BRIDGELUX |

**SNIP GRACE 3A (ROUND)**

| | |
|-------------------|--------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 90 X 90 X H 30 MM |
| CUT-OUT | : 75 X 75 MM |
| POWERED BY | : BRIDGELUX |

**SNIP GRACE 1B (SQUARE)**

| | |
|-------------------|--------------------------|
| WATTS | : 16W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 120 X 120 X H 30 MM |
| CUT-OUT | : 105 X 105 MM |
| POWERED BY | : BRIDGELUX |

**SNIP GRACE 2B (SQUARE)**

| | |
|-------------------|--------------------------|
| WATTS | : 24W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 170 X 170 X H 30 MM |
| CUT-OUT | : 155 X 155 MM |
| POWERED BY | : BRIDGELUX |

**SNIP GRACE 3B (SQUARE)**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|------------------------------|
| WATTS | : 8W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND WHITE/BLACK |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 100 x H 50 MM |
| LUMENS | : 720Lm |
| POWERED BY | : BRIDGELUX |

**PRE TUBO 1A / 1B**

| | |
|------------|------------------------------|
| WATTS | : 15W |
| MATERIAL | : ALUMINIUM |
| FINISH | : SAND WHITE/BLACK |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 125 x H 50 MM |
| LUMENS | : 1350Lm |
| POWERED BY | : BRIDGELUX |

**PRE TUBO 2A / 2B**

| | |
|-------------------|--------------------------------|
| WATTS | : 18W |
| MATERIAL | : ALUMINIUM |
| FINISH & MATERIAL | : MATT WHITE / BLACK |
| DIFFUSER | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 590 X 50 X H 70 MM |
| DRIVER | : PRISHA ISOLATED |
| POWERED BY | : BRIDGELUX |

**PRE LEAD 1A / 1B (SUSPENDED)**

| | |
|------------|--------------------------------|
| WATTS | : 18W |
| MATERIAL | : ALUMINIUM |
| FINISH | : WOODEN FINISH |
| DIFFUSER | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 590 X 50 X H 70 MM |
| DRIVER | : PRISHA ISOLATED |
| POWERED BY | : BRIDGELUX |

**PRE LEAD 1C (SUSPENDED)**

| | |
|------------|--------------------------------|
| WATTS | : 36W |
| MATERIAL | : ALUMINIUM |
| FINISH | : MATT WHITE / BLACK |
| DIFFUSER | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 1180 X 50 X H 70 MM |
| DRIVER | : PRISHA ISOLATED |
| POWERED BY | : BRIDGELUX |

**PRE LEAD 2A / 2B (SUSPENDED)**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|--------------------------------|
| WATTS | : 36W |
| MATERIAL | : ALUMINIUM |
| FINISH | : WOODEN FINISH |
| DIFFUSER | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 1180 X 50 X H 70 MM |
| DRIVER | : PRISHA ISOLATED |
| POWERED BY | : BRIDGELUX |

**PRE LEAD 2C (SUSPENDED)**

| | |
|-------------------|--------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K , 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 37 X H 26 MM |
| CUT-OUT | : Ø 32 MM |
| LUMENS | : 270Lm |
| POWERED BY | : BRIDGELUX |

**PRE COM 1A**

| | |
|-------------------|--------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K , 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 37 X H 26 MM |
| CUT-OUT | : Ø 32 MM |
| LUMENS | : 270Lm |
| POWERED BY | : BRIDGELUX |

**PRE COM 1B**

| | |
|-------------------|---|
| WATTS | : 7W ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSION | : 60 X H 52MM |
| CUT-OUT | : 50MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE PURE**

| | |
|-------------------|--------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K , 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 65 X H 40 MM |
| CUT-OUT | : Ø 55 MM |
| LUMENS | : 270Lm |
| POWERED BY | : BRIDGELUX |

**PRE COSTA 1**

PRODUCT DESCRIPTION**PRODUCT**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 7W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 85 X H 60 MM | |
| CUT-OUT | : Ø 75 MM | |
| LUMENS | : 630Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COSTA 2**

| | | |
|-------------------|--------------------------|-------|
| WATTS | : 12W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 108 X H 68 MM | |
| CUT-OUT | : Ø 95 MM | |
| LUMENS | : 1080Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COSTA 3**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 18W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 128 X H 80 MM | |
| CUT-OUT | : Ø 116 MM | |
| LUMENS | : 1620Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COSTA 4**

| | | |
|-------------------|--------------------------|--|
| WATTS | : 24W | |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 136 X H 80 MM | |
| CUT-OUT | : Ø 120 MM | |
| LUMENS | : 2160Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COSTA 5**

| | | |
|-------------------|------------------------------------|-------|
| WATTS | : 7W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 60 X H 70 MM | |
| CUT-OUT | : Ø 50 MM | |
| CRI | : ≥ 85 | |
| LUMENS | : 630Lm | |
| POWER FACTOR | : ≥ 0.95 | |
| POWERED BY | : BRIDGELUX | |

**PRE DIVINE 1**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|------------------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K , 6000K |
| DIMENSION | : 80 X H 80 MM |
| CUT-OUT | : Ø 72 MM |
| CRI | : ≥ 85 |
| LUMENS | : 1080Lm |
| POWER FACTOR | : ≥ 0.95 |
| POWERED BY | : BRIDGELUX |

**PRE DIVINE 2**

| | |
|-------------------|------------------------------------|
| WATTS | : 18W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K , 6000K |
| DIMENSION | : 92 X H 100 MM |
| CUT-OUT | : Ø 80 MM |
| CRI | : ≥ 85 |
| LUMENS | : 1620Lm |
| POWER FACTOR | : ≥ 0.95 |
| POWERED BY | : BRIDGELUX |

**PRE DIVINE 3**

| | |
|-------------------|------------------------------|
| WATTS | : 7W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 60 X H 70 MM |
| CUT-OUT | : Ø 50 MM |
| CRI | : ≥85 |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE DIVITE 1**

| | |
|-------------------|------------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 80 X H 80 MM |
| CUT-OUT | : Ø 72 MM |
| CRI | : ≥85 |
| LUMENS | : 1080Lm |
| POWERED BY | : BRIDGELUX |

**PRE DIVITE 2**

| | |
|-------------------|------------------------------|
| WATTS | : 18W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 92 X H 100 MM |
| CUT-OUT | : Ø 80 MM |
| CRI | : ≥85 |
| LUMENS | : 1620Lm |
| POWERED BY | : BRIDGELUX |

**PRE DIVITE 3**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------|
| WATTS | : 30W |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 108 X H 120 MM |
| CUT-OUT | : Ø 100 MM |
| CRI | : ≥85 |
| LUMENS | : 3000Lm |
| POWERED BY | : BRIDGELUX |

**PRE DIVITE 4**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 7W | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 60 X H 70 MM | |
| CUT-OUT | : Ø 50 MM | |
| CRI | : ≥85 | |
| LUMENS | : 630Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DIVITE 1B**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 12W | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 80 X H 80 MM | |
| CUT-OUT | : Ø 72 MM | |
| CRI | : ≥85 | |
| LUMENS | : 1080Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DIVITE 2B**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 18W | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 92 X H 100 MM | |
| CUT-OUT | : Ø 80 MM | |
| CRI | : ≥85 | |
| LUMENS | : 1620Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DIVITE 3B**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 7W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 59 X H 60 MM | |
| CUT-OUT | : Ø 52 MM | |
| LUMENS | : 630Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COST 1**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 82 X H 71 MM
 CUT-OUT : Ø 72 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE COST 2**

WATTS : 18W ● ● ●
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 98 X H 86 MM
 CUT-OUT : Ø 90 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX

**PRE COST 3**

WATTS : 30W
 FINISH & MATERIAL : MATT WHITE & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 6000K
 CRI : ≥ 85
 DIMENSION : 118 X H 125 MM
 CUT-OUT : Ø 106 MM
 LUMENS : 2700Lm
 POWERED BY : BRIDGELUX

**PRE COST 4**

WATTS : 7W ● ● ●
 FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 59 X H 60 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 630Lm
 POWERED BY : BRIDGELUX

**PRE COST 1B**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 82 X H 71 MM
 CUT-OUT : Ø 72 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE COST 2B**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 18W ● ● ●
 FINISH & MATERIAL : MATT BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 98 X H 86 MM
 CUT-OUT : Ø 90 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX

**PRE COST 3B**

WATTS : 7W ● ● ●
 FINISH & MATERIAL : ROSE GOLD & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 59 X H 60 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 630Lm
 POWERED BY : BRIDGELUX

**PRE GOLD 1**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : ROSE GOLD & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 82 X H 71 MM
 CUT-OUT : Ø 72 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE GOLD 2**

WATTS : 18W ● ● ●
 FINISH & MATERIAL : ROSE GOLD & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 98 X H 86 MM
 CUT-OUT : Ø 90 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX

**PRE GOLD 3**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : SAND WHITE & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 60 X H 67 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE CODE 1A**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 60 X H 67 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE CODE 1B**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : GUN BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 60 X H 67 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE CODE 1C**

WATTS : 12W ● ● ●
 FINISH & MATERIAL : ROSE GOLD & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 60 X H 67 MM
 CUT-OUT : Ø 52 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE CODE 1D**

WATTS : 18W ● ● ●
 FINISH & MATERIAL : SAND WHITE & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 75 MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX

**PRE CODE 2A**

WATTS : 18W ● ● ●
 FINISH & MATERIAL : SAND BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 75 MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX

**PRE CODE 2B**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 18W ● ● ●
 FINISH & MATERIAL : GUN BLACK & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 75 MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX



PRE CODE 2C

WATTS : 18W ● ● ●
 FINISH & MATERIAL : ROSE GOLD & ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 75 MM
 CUT-OUT : Ø 65 MM
 LUMENS : 1620Lm
 POWERED BY : BRIDGELUX



PRE CODE 2D

WATTS : 7W ● ● ●
 FINISH & MATERIAL : WHITE & WHITE + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 62 X H 43 MM
 CUT-OUT : Ø 54 MM
 LUMENS : 700Lm
 POWERED BY : BRIDGELUX



PRE META 1A

WATTS : 7W ● ● ●
 FINISH & MATERIAL : BLACK & BLACK + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 62 X H 43 MM
 CUT-OUT : Ø 54 MM
 LUMENS : 700Lm
 POWERED BY : BRIDGELUX



PRE META 1B

WATTS : 12W ● ● ●
 FINISH & MATERIAL : WHITE & WHITE + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 82 X H 45 MM
 CUT-OUT : Ø 74 MM
 LUMENS : 1200Lm
 POWERED BY : BRIDGELUX



PRE META 2A

PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W ● ● ●
 FINISH & MATERIAL : BLACK & BLACK + ALUMINIUM
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 82 X H 45 MM
 CUT-OUT : Ø 74 MM
 LUMENS : 1200Lm
 POWERED BY : BRIDGELUX



PRE META 2B

WATTS : 12W ● ● ●
 FINISH & MATERIAL : MATT WHITE + ALUMINIUM
 REFLECTOR : SHINE BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 73 MM
 CUT-OUT : Ø 64 MM
 LUMENS : 1200Lm
 POWERED BY : BRIDGELUX



PRE VIITOR 1A

WATTS : 12W ● ● ●
 FINISH & MATERIAL : MATT BLACK + ALUMINIUM
 REFLECTOR : SHINE BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 72 X H 73 MM
 CUT-OUT : Ø 64 MM
 LUMENS : 1200Lm
 POWERED BY : BRIDGELUX



PRE VIITOR 1B

WATTS : 18W ● ● ●
 FINISH & MATERIAL : MATT WHITE + ALUMINIUM
 REFLECTOR : SHINE BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 83 X H 84 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1800Lm
 POWERED BY : BRIDGELUX



PRE VIITOR 2A

WATTS : 18W ● ● ●
 FINISH & MATERIAL : MATT BLACK + ALUMINIUM
 REFLECTOR : SHINE BLACK
 BEAM ANGLE : 36°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥ 85
 DIMENSION : 83 X H 84 MM
 CUT-OUT : Ø 75 MM
 LUMENS : 1800Lm
 POWERED BY : BRIDGELUX



PRE VIITOR 2B

PRODUCT DESCRIPTION**PRODUCT**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 7W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 70 X H 53 MM | |
| CUT-OUT | : Ø 60 MM | |
| LUMENS | : 630Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COIN 1**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 12W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 92 X H 75 MM | |
| CUT-OUT | : Ø 75 MM | |
| LUMENS | : 1080Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COIN 2**

| | | |
|-------------------|------------------------------|-------|
| WATTS | : 18W | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 110 X H 76 MM | |
| CUT-OUT | : Ø 80 MM | |
| LUMENS | : 1620Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE COIN 3**

| | | |
|-------------------|----------------------------------|--|
| WATTS | : 3W | |
| FINISH & MATERIAL | : MATT WHITE + BLACK & ALUMINIUM | |
| BEAM ANGLE | : 24° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 67 x 32 x H 33 MM | |
| CUT-OUT | : Ø 62 x 25 MM | |
| LUMENS | : 300 Lm | |
| POWERED BY | : BRUDGELUX | |

**PRE FILA 1A**

| | | |
|-------------------|----------------------------------|--|
| WATTS | : 3W | |
| FINISH & MATERIAL | : MATT BLACK + BLACK & ALUMINIUM | |
| BEAM ANGLE | : 24° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥ 85 | |
| DIMENSION | : 67 x 32 x H 33 MM | |
| CUT-OUT | : Ø 62 x 25 MM | |
| LUMENS | : 300 Lm | |
| POWERED BY | : BRUDGELUX | |

**PRE FILA 1B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|----------------------------------|
| WATTS | : 6W |
| FINISH & MATERIAL | : MATT WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 121 x 32 x H 35 MM |
| CUT-OUT | : Ø 113 x 25 MM |
| LUMENS | : 600 Lm |
| POWERED BY | : BRUDGELUX |

**PRE FILA 2A**

| | |
|-------------------|----------------------------------|
| WATTS | : 6W |
| FINISH & MATERIAL | : MATT BLACK + BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 121 x 32 x H 35 MM |
| CUT-OUT | : Ø 113 x 25 MM |
| LUMENS | : 600 Lm |
| POWERED BY | : BRUDGELUX |

**PRE FILA 2B**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 5 X 2W | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 146 X H 44 MM | |
| CUT-OUT | : 137 X 35 MM | |
| POWERED BY | : BRIDGELUX | |
| DRIVER | : BAG or EQUIVALENT | |

**SNIP TAGO 1A / 1B**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 10 X 2W | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 281 X H 44 MM | |
| CUT-OUT | : 271 X 35 MM | |
| POWERED BY | : BRIDGELUX | |
| DRIVER | : BAG or EQUIVALENT | |

**SNIP TAGO 2A / 2B**

| | |
|-------------------|--------------------------------|
| WATTS | : 1 X 4W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 51 X H 51 MM |
| CUT-OUT | : 41 X 41 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP RAGA 1A / 1B**

PRODUCT DESCRIPTION**PRODUCT**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 3 X 4W | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 128 X H 50 MM | |
| CUT-OUT | : 118 X 42 MM | |
| POWERED BY | : BRIDGELUX | |
| DRIVER | : BAG or EQUIVALENT | |

**SNIP RAGA 2A / 2B**

| | | |
|-------------------|--------------------------------|-------|
| WATTS | : 5 X 4W | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM | |
| BEAM ANGLE | : 36° | |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K | |
| DIMENSION | : 205 x 50 x H 55 MM | |
| CUT-OUT | : 195 x 42 MM | |
| POWERED BY | : BRIDGELUX | |
| DRIVER | : BAG or EQUIVALENT | |

**SNIP RAGA 3A / 3B**

| | | |
|-------------------|---------------------|--|
| WATTS | : 1 X 12W = 12W | |
| FINISH & MATERIAL | : ALUMINIUM + WHITE | |
| BEAM ANGLE | : 24° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥90 | |
| DIMENSION | : 90 x 100 | |
| CUT-OUT | : Ø 75 MM | |
| LUMENS | : 1320 Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DOMO 1A**

| | | |
|-------------------|---------------------|--|
| WATTS | : 1 X 12W = 12W | |
| FINISH & MATERIAL | : ALUMINIUM + BLACK | |
| BEAM ANGLE | : 24° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥90 | |
| DIMENSION | : 90 x 100 | |
| CUT-OUT | : Ø 75 MM | |
| LUMENS | : 1320 Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DOMO 1B**

| | | |
|-------------------|---------------------|--|
| WATTS | : 2 X 12W = 24W | |
| FINISH & MATERIAL | : ALUMINIUM + WHITE | |
| BEAM ANGLE | : 24° | |
| CCT(K) | : 3000K, 4000K | |
| CRI | : ≥90 | |
| DIMENSION | : 170 x 90 x 100 | |
| CUT-OUT | : Ø 155 x 75 | |
| LUMENS | : 2640Lm | |
| POWERED BY | : BRIDGELUX | |

**PRE DOMO 2A**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|---------------------|
| WATTS | : 2 X 12W = 24W |
| FINISH & MATERIAL | : ALUMINIUM + BLACK |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥90 |
| DIMENSION | : 170 x 90 x 100 |
| CUT-OUT | : Ø 155 x 75 |
| LUMENS | : 2640Lm |
| POWERED BY | : BRIDGELUX |

**PRE DOMO 2B**

| | |
|-------------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K,5000K,6000K |
| CRI | : ≥80 |
| DIMENSION | : 90 X H 95 MM |
| CUT-OUT | : 83 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE SPOUT 1A**

| | |
|-------------------|---------------------------|
| WATTS | : 12W ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K,5000K,6000K |
| CRI | : ≥80 |
| DIMENSION | : 90 X H 95 MM |
| CUT-OUT | : 83 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE SPOUT 1B**

| | |
|-------------------|---------------------------|
| WATTS | : 2X 12W = 24W ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K,5000K,6000K |
| CRI | : ≥80 |
| DIMENSION | : 175 X 95 X H 95 MM |
| CUT-OUT | : L167 X W 82 MM |
| LUMENS | : 2160LM |
| POWERED BY | : BRIDGELUX |

**PRE SPOUT 2A**

| | |
|-------------------|---------------------------|
| WATTS | : 2X 12W = 24W ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM |
| BEAM ANGLE | : 24° |
| CCT(K) | : 3000K,4000K,5000K,6000K |
| CRI | : ≥80 |
| DIMENSION | : 175 X 95 X H 95 MM |
| CUT-OUT | : L167 X W 82 MM |
| LUMENS | : 2160LM |
| POWERED BY | : BRIDGELUX |

**PRE SPOUT 2B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 40° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 68 X H 140 MM |
| CUT-OUT | : 60 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE AMBRE 1A**

| | |
|-------------------|----------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : NICKEL BLACK & ALUMINIUM |
| BEAM ANGLE | : 40° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 68 X H 140 MM |
| CUT-OUT | : 60 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE AMBRE 1B**

| | |
|-------------------|--------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE | : 40° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 68 X H 140 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE AMBRETO 1A**

| | |
|-------------------|----------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : NICKEL BLACK & ALUMINIUM |
| BEAM ANGLE | : 40° |
| CCT(K) | : 3000K,4000K |
| CRI | : ≥85 |
| DIMENSION | : 68 X H 140 MM |
| LUMENS | : 1080LM |
| POWERED BY | : BRIDGELUX |

**PRE AMBRETO 1B**

| | |
|-------------------|------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND WHITE |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 70 x H 77 MM |
| CUT-OUT | : 58 MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWING 1A**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
 FINISH & MATERIAL : SAND WHITE
 BEAM ANGLE : 60°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥85
 DIMENSION : Ø 85 x H 85 MM
 CUT-OUT : 60 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE SWING 2A**

WATTS : 7W
 FINISH & MATERIAL : SAND BLACK
 BEAM ANGLE : 60°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥85
 DIMENSION : Ø 70 x H 77 MM
 CUT-OUT : 58 MM
 LUMENS : 630Lm
 POWERED BY : BRIDGELUX

**PRE SWING 1B**

WATTS : 12W
 FINISH & MATERIAL : SAND BLACK
 BEAM ANGLE : 60°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥85
 DIMENSION : Ø 85 x H 85 MM
 CUT-OUT : 60 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE SWING 2B**

WATTS : 7W
 FINISH & MATERIAL : GOLD + BLACK
 BEAM ANGLE : 60°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥85
 DIMENSION : Ø 70 x H 77 MM
 CUT-OUT : 58 MM
 LUMENS : 630Lm
 POWERED BY : BRIDGELUX

**PRE SWING 1C**

WATTS : 12W
 FINISH & MATERIAL : GOLD + BLACK
 BEAM ANGLE : 60°
 CCT(K) : 3000K, 4000K, 5000K, 6000K
 CRI : ≥85
 DIMENSION : Ø 85 x H 85 MM
 CUT-OUT : 60 MM
 LUMENS : 1080Lm
 POWERED BY : BRIDGELUX

**PRE SWING 2C**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND WHITE |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 70 x H 87 MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 1A**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND WHITE |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 85 x H 106 MM |
| LUMENS | : 1080Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 2A**

| | |
|-------------------|------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND BLACK |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 70 x H 87 MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 1B**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND BLACK |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 85 x H 106 MM |
| LUMENS | : 1080Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 2B**

| | |
|-------------------|------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : GOLD + BLACK |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 70 x H 87 MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 1C**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : GOLD + BLACK |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : Ø 85 x H 106 MM |
| LUMENS | : 1080Lm |
| POWERED BY | : BRIDGELUX |

**PRE SWINGER 2C**

| | |
|-------------------|------------------------------|
| WATT | : 12W |
| FINISH & MATERIAL | : WHITE & ALUMINIUM |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥80 |
| BEAM ANGLE | : 24° |
| DIMENSION | : 85 X H 71 MM |
| CUT-OUT | : Ø 78 MM |
| LUMEN | : 1350Lm |
| ADJUSTABLE ANGLE | : LAMP HEAD 0 ~ 80° / 340° |
| DRIVER | : PHILIPS OR EQUIVALENT |
| POWERED BY | : CREE |

**PRO SCREW RD NEW**

| | |
|-------------------|------------------------------|
| WATT | : 12W |
| FINISH & MATERIAL | : WHITE & ALUMINIUM |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥80 |
| BEAM ANGLE | : 24° |
| DIMENSION | : 74 X H 88 MM |
| LUMEN | : 1350Lm |
| ADJUSTABLE ANGLE | : LAMP HEAD 0 ~ 80° / 340° |
| DRIVER | : PHILIPS OR EQUIVALENT |
| POWERED BY | : CREE |

**PRO SCREW DRIVER MINI**

| | |
|------------|----------------------|
| WATTS | : 7W |
| FINISH | : MATT WHITE + BLACK |
| MATERIAL | : ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥85 |
| DIMENSION | : 55 X H 60 MM |
| LUMENS | : 700Lm |
| POWERED BY | : BRIDGELUX |

**PRE CADMO 1A**

| | |
|------------|----------------------|
| WATTS | : 12W |
| FINISH | : MATT WHITE + BLACK |
| MATERIAL | : ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥85 |
| DIMENSION | : 68 X H 68 MM |
| LUMENS | : 1200Lm |
| POWERED BY | : BRIDGELUX |

**PRE CADMO 2A**



PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|---|
| WATTS | : 7W |
| FINISH | : MATT WHITE & MATT BLACK |
| MATERIAL | : ALUMINIUM |
| REFLECTOR | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : 54 X H 75 MM |
| LUMENS | : 630Lm |
| POWERED BY | : BRIDGELUX |

**PRE BASILIO 1A/1B**

| | |
|------------|---|
| WATTS | : 12W |
| FINISH | : MATT WHITE & MATT BLACK |
| MATERIAL | : ALUMINIUM |
| REFLECTOR | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : 76 X H 100 MM |
| LUMENS | : 1080Lm |
| POWERED BY | : BRIDGELUX |

**PRE BASILIO 2A/2B**

| | |
|------------|---|
| WATTS | : 18W |
| FINISH | : MATT WHITE & MATT BLACK |
| MATERIAL | : ALUMINIUM |
| REFLECTOR | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥85 |
| DIMENSION | : 94 X H 120 MM |
| LUMENS | : 1620Lm |
| POWERED BY | : BRIDGELUX |

**PRE BASILIO 3A/3B**

| | |
|-------------------|------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : ALUMINIUM + WHITE |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥90 |
| DIMENSION | : 50 x H 70 MM |
| LUMENS | : 1320 Lm |
| POWERED BY | : CREE |

**PRE ALPINE 1A / 1B**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : ALUMINIUM + WHITE |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥90 |
| DIMENSION | : 70 x H 75 MM |
| LUMENS | : 1320 Lm |
| POWERED BY | : CREE |

**PRE ALPINE 2A / 2B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|-----------------------------|
| WATTS | : 20W |
| FINISH & MATERIAL | : ALUMINIUM + WHITE |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K,4000K, 5000K, 6000K |
| CRI | : ≥90 |
| DIMENSION | : 76 x H 95 MM |
| LUMENS | : 1320 Lm |
| POWERED BY | : CREE |

**PRE ALPINE 3A / 3B**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 54.5 X 135 MM |
| LUMENS | : 1020Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 1A**

| | |
|-------------------|------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 54.5 X 135 MM |
| LUMENS | : 1020Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 1B**

| | |
|-------------------|------------------------------|
| WATTS | : 18W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 63.5 X 155 MM |
| LUMENS | : 1530Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 2A**

| | |
|-------------------|------------------------------|
| WATTS | : 18W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 63.5 X 155 MM |
| LUMENS | : 1530Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 2B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------|
| WATTS | : 30W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K , 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 76.5 X 180 MM |
| LUMENS | : 2550Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 3A**

| | |
|-------------------|--------------------------|
| WATTS | : 30W |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 60° |
| CCT(K) | : 3000K, 4000K , 6000K |
| CRI | : ≥ 85 |
| DIMENSION | : 76.5 X 180 MM |
| LUMENS | : 2550Lm |
| POWERED BY | : BRIDGELUX |

**PRE LOOP EX 3B**

| | |
|-------------------|--------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 70 X H 65 MM |
| CUT-OUT | : 60 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP ECOB 1A / 1B**

| | |
|-------------------|--------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 85 X H 75 MM |
| CUT-OUT | : 76 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP ECOB 2A / 2B**

| | |
|-------------------|--------------------------------|
| WATTS | : 15W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 85 X H 75 MM |
| CUT-OUT | : 76 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP ECOB 3A / 3B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------------|
| WATTS | : 18W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 95 X H 100 MM |
| CUT-OUT | : 86 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP ECOB 4A / 4B**

| | |
|-------------------|--------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| DIMENSION | : 83 X 83 X H 83 MM |
| CUT-OUT | : 77 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO 1A / 1B**

| | |
|-------------------|--------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 83 X 83 X H 83 MM |
| CUT-OUT | : 77 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO 2A / 2B**

| | |
|-------------------|--------------------------------|
| WATTS | : 15W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 83 X 83 X H 83 MM |
| CUT-OUT | : 77 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO 3A / 3B**

| | |
|-------------------|--------------------------------|
| WATTS | : 2 X 7W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 162 X 83 X H 83 MM |
| CUT-OUT | : 155 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO TWIN 1A / 1B**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--------------------------------|
| WATTS | : 2 X 12W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 162 X 83 X H 83 MM |
| CUT-OUT | : 155 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO TWIN 2A / 2B**

| | |
|-------------------|--------------------------------|
| WATTS | : 2 X 15W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 36° |
| CCT(K) | : 3000K, 4000K, 5000K, 6000K |
| DIMENSION | : 162 X 83 X H 83 MM |
| CUT-OUT | : 155 X 77 MM |
| POWERED BY | : BRIDGELUX |
| DRIVER | : BAG or EQUIVALENT |

**SNIP EMONDO TWIN 3A / 3B**

| | |
|-------------------|--------------------------------|
| WATTS | : 16W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSIONS | : 120 X 40MM |
| LUMENS | : 1350Lm |
| POWERED BY | : BRIDGELUX |

**WANO-G 1A / 1B**

| | |
|-------------------|--------------------------------|
| WATTS | : 24W |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE | : 120° |
| CCT(K) | : 3000K, 4000K, 6000K |
| CRI | : ≥ 80 |
| DIMENSIONS | : 175 X 40MM |
| LUMENS | : 1980Lm |
| POWERED BY | : BRIDGELUX |

**WANO-G 2A / 2B**



SNIP LED STRIPS

| ITEM CODE | WATT / METER | CCT | VOLTAGE | PCB WIDTH | PCB |
|------------------------|--------------|-----|---------|-----------|-----------------|
| 60 LED / METER | | | | | |
| SLS 001 | 5W | 3K | 12V | 8MM | DOUBLE PCB PET |
| SLS 002 | 5W | 4K | 12V | 8MM | DOUBLE PCB PET |
| 120 LED / METER | | | | | |
| SLS 003 | 12W | 3K | 12V | 8MM | DOUBLE PCB PET |
| SLS 004 | 12W | 4K | 12V | 8MM | DOUBLE PCB PET |
| SLS 005 | 12W | 6K | 12V | 8MM | DOUBLE PCB PET |
| SLS 006 | 14W | 3K | 24V | 8MM | DOUBLE PCB H PI |
| SLS 007 | 14W | 4K | 24V | 8MM | DOUBLE PCB H PI |
| SLS 008 | 14W | 3K | 12V | 8MM | DOUBLE PCB H PI |
| SLS 009 | 14W | 4K | 12V | 8MM | DOUBLE PCB H PI |
| SLS 019 | 12W | 3K | 12V | 5MM | DOUBLE PCB H PI |
| SLS 020 | 12W | 4K | 12V | 5MM | DOUBLE PCB H PI |
| 168 LED / METER | | | | | |
| SLS 010 | 17W | 3K | 12V | 10MM | 3Z PCB |
| SLS 011 | 17W | 4K | 12V | 10MM | 3Z PCB |
| SLS 012 | 17W | 6K | 12V | 10MM | 3Z PCB |
| SLS 013 | 17W | 3K | 24V | 10MM | 3Z PCB |
| SLS 014 | 17W | 4K | 24V | 10MM | 3Z PCB |
| SLS 023 | 17W | 3K | 12V | 5MM | DOUBLE PCB H PI |
| SLS 024 | 17W | 4K | 12V | 5MM | DOUBLE PCB H PI |
| 192 LED / METER | | | | | |
| SLS 015 | 18W | 3K | 24V | 10MM | 3Z PCB |
| SLS 016 | 18W | 4K | 24V | 10MM | 3Z PCB |
| 240 LED / METER | | | | | |
| SLS 017 | 22W | 3K | 24V | 10MM | 3Z PCB |
| SLS 018 | 22W | 4K | 24V | 10MM | 3Z PCB |
| SLS 021 | 22W | 3K | 12V | 10MM | 3Z PCB |
| SLS 022 | 22W | 4K | 12V | 10MM | 3Z PCB |

SNIP SMPS DRIVER RANGE

| SR. | CODE | DESCRIPTION | OUTPUT WATTAGE | DIMENSION-L x W x H (mm) |
|-----|--------------|-------------|----------------|--------------------------|
| 1 | SLD 12V 2A | 12V / 2A | 24W | 75 x 35 x 26 |
| 2 | SLD 12V 5A | 12V / 5A | 60W | 146 x 35 x 26 |
| 3 | SLD 12V 8A | 12V / 8A | 96W | 155 x 38 x 33 |
| 4 | SLD 12V 10A | 12V / 10A | 120W | 192 x 38 x 33 |
| 5 | SLD 12V 12A | 12V / 12A | 144W | 175 x 48 x 32 |
| 6 | SLD 12V 20A | 12V / 20A | 240W | 227 x 48 x 32 |
| 7 | SLD 24V 2.5A | 24V / 2.5A | 60W | 122 x 35 x 26 |
| 8 | SLD 24V 5A | 24V / 5A | 120W | 192 x 38 x 33 |
| 9 | SLD 24V 10A | 24V / 10A | 240W | 227 x 48 x 32 |

Fundamental of Lighting - Part 3

Durability and Protection Understanding IP Ratings

The Ingress Protection (IP) Rating indicates a lighting fixture's protection against dust and water. It follows the format IPXY, where:

- ✓ **X (First Digit)** : Represents protection against solids (ranging from 0 to 6, with 6 being dust-tight).
- ✓ **Y (Second Digit)** : Represents protection against liquids (ranging from 0 to 8, with 8 being submersible under pressure).

Example : An IP65 rating means the fixture is completely dust-tight (6) and protected against water jets (5), making it suitable for outdoor use or areas exposed to moisture.

Colour Consistency MacAdam Steps for Uniformity


MacAdam Steps, or MacAdam Ellipses, quantify the perceptible colour difference between multiple LEDs. It ensures colour consistency across lighting installations.

- ✓ **Fewer steps (e.g., 1-3)**: Indicates minimal colour variation, resulting in a highly uniform light appearance. This is crucial for applications where colour consistency is paramount, such as high-end retail or art galleries.
- ✓ **Higher steps (e.g., 5-7)**: Denotes more noticeable colour differences, which might be acceptable in less critical applications but could lead to visual discrepancies in large installations.

PRIVE OUTDOOR SERIES



COBRA FLEX



E11 CE RoHS IP66




WATTS : 11.25W
 MATERIAL : PC + TPU + PMMA
 CCT(K) : 3000K
 OPTICS : 15° x 45°
 INPUT : DC24V (Driver not Included)
 LUMENS : 930Lm PER FEET
 LENGTH : 310 MM


WATTS : 22.5W
 MATERIAL : PC + TPU + PMMA
 CCT(K) : 3000K
 OPTICS : 15° x 45°
 INPUT : DC24V (Driver not Included)
 LUMENS : 930Lm PER FEET
 LENGTH : 600 MM

MOUNTING ACCESSORIES

TREE MOUNTING



WALL MOUNTING



CONNECTING ACCESSORIES

POWER LEAD CABLE 300



M-12-2 PIN
 L-300 MM

POWER LEAD CABLE 1800




M-12-2 PIN
 L-1800 MM

JUNCTION CABLE



M-12-2 PIN
 L-300 MM

TREEBO



| | |
|--------------------|--|
| WATTS | : 15W |
| BEAM ANGLE | : 10° 30° 60° |
| INPUT VOLTAGE | : AC220V |
| IMPACT PROTECTION | : IK08 |
| INGRESS PROTECTION | : IP66 |
| POWER FACTOR | : ≥0.95 |
| LIFETIME | : >60000 HRS. |
| CCT(K) | : 3000K |
| CRI | : ≥90 |
| DIMENSION | : Ø60 X 113 X 127 MM |
| LUMENS | : 1350LM |
| POWERED BY | : CREE |
| FINISH MATERIAL | : GRAPHITE GREY & CORROSION RESISTENT DIE-CAST ALUMINIUM HOUSING |





PRR GLITZ 1A

| | |
|------------|-----------------------------|
| WATTS | : 10W (ADJUSTABLE) |
| IP RATING | : IP65 |
| MATERIAL | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥90 |
| DIMENSION | : Ø62 X H 85 MM |
| CUT-OUT | : Ø55MM |
| LUMENS | : 1100Lm |
| POWERED BY | : OSRAM |
| DRIVER | : IP65 |



USP : FRONT OPENABLE

PRR GLITZ 2A

| | |
|------------|-----------------------------|
| WATTS | : 18W (ADJUSTABLE) |
| IP RATING | : IP65 |
| MATERIAL | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥90 |
| DIMENSION | : Ø84 X H 110 MM |
| CUT-OUT | : Ø75MM |
| LUMENS | : 1980Lm |
| POWERED BY | : OSRAM |
| DRIVER | : IP65 |



USP : FRONT OPENABLE

PRR GLITZ 3A

| | |
|------------|-----------------------------|
| WATTS | : 30W (ADJUSTABLE) |
| IP RATING | : IP65 |
| MATERIAL | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38° |
| CCT(K) | : 3000K, 4000K |
| CRI | : ≥90 |
| DIMENSION | : Ø110 X H 130 MM |
| CUT-OUT | : Ø95MM |
| LUMENS | : 3300Lm |
| POWERED BY | : OSRAM |
| DRIVER | : IP65 |



USP : FRONT OPENABLE

BRUN PLAFOND 1



| | |
|-------------------|---------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 48° |
| LUMENS | : 700Lm |
| IP RATING | : IP54 |
| UGR | : <16 |
| DIMENSION | : Ø 110 X H 60MM |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

BRUN SVELTO 1



| | |
|-------------------|--------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 120° |
| LUMENS | : 1440Lm |
| IP RATING | : IP54 |
| UGR | : <18 |
| DIMENSION | : Ø 145 X 228 X H 406 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN SVELTO 2



| | |
|-------------------|--------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 120° |
| LUMENS | : 1440Lm |
| IP RATING | : IP54 |
| UGR | : <18 |
| DIMENSION | : Ø 145 X 145 X H 360 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN SVELTO 3



| | |
|-------------------|---------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 120° |
| LUMENS | : 1440Lm |
| IP RATING | : IP54 |
| UGR | : <18 |
| DIMENSION | : Ø 145 x 145 X H 1200 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN SVELTO 4



WATTS : 12W
FINISH & MATERIAL : BROWN & ALUMINIUM
CCT(K) : 3000K
OPTICS : 1200
LUMENS : 1440Lm
IP RATING : IP54
UGR : <18
DIMENSION : Ø 145 X 145 X H 400 MM
LAMP TYPE : SMD
POWERED BY : EDISION

BRUN SVELTO 5



WATTS : 12W
FINISH & MATERIAL : BROWN & ALUMINIUM
CCT(K) : 3000K
OPTICS : 1200
LUMENS : 1440Lm
IP RATING : IP54
UGR : <18
DIMENSION : Ø 145 X 145 X H 600 MM
LAMP TYPE : SMD
POWERED BY : EDISION

BRUN KINAKO 1



WATTS : 6W
FINISH & MATERIAL : BROWN & ALUMINIUM
CCT(K) : 3000K
OPTICS : 1200
LUMENS : 580Lm
IP RATING : IP65
UGR : <18
DIMENSION : Ø 100 X 100 X H 108 MM
LAMP TYPE : SMD
POWERED BY : EDISION

BRUN KINAKO 2



WATTS : 6W
FINISH & MATERIAL : BROWN & ALUMINIUM
CCT(K) : 3000K
OPTICS : 1200
LUMENS : 580Lm
IP RATING : IP65
UGR : <18
DIMENSION : Ø 100 X 100 X H 350 MM
LAMP TYPE : SMD
POWERED BY : EDISION



BRUN KINAKO 3



| | |
|-------------------|--------------------------|
| WATTS | : 6W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 1440Lm |
| IP RATING | : IP54 |
| UGR | : <18 |
| DIMENSION | : Ø 100 X 100 X H 550 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN LEGER 1



| | |
|-------------------|-------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1800 |
| LUMENS | : 1200Lm |
| IP RATING | : IP65 |
| UGR | : <22 |
| DIMENSION | : Ø 180 X 80 X H 426 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN LEGER 2



| | |
|-------------------|-------------------------|
| WATTS | : 16W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1800 |
| LUMENS | : 1550Lm |
| IP RATING | : IP65 |
| UGR | : <22 |
| DIMENSION | : Ø 180 X 80 X H 626 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN BORNE 1



| | |
|-------------------|--------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 680Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 120 X 135 X H 230 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN BORNE 2



| | |
|-------------------|--------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 860Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 125 X 158 X H 206 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN BORNE 3



| | |
|-------------------|--------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 680Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 120 X 330 X H 800 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN BORNE 4



| | |
|-------------------|---------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 680Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 120 X 330 X H 1500 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN FIERO



| | |
|-------------------|--------------------------|
| WATTS | : 5W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 580Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 105 X 240 X H 600 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN CLAIR



| | |
|-------------------|---------------------|
| WATTS | : 8.5W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1800 |
| LUMENS | : 800Lm |
| IP RATING | : IP65 |
| UGR | : <22 |
| DIMENSION | : Ø 400 X H 435 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN LUMINA 1



| | |
|-------------------|------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 60 X 60 X H 300 MM |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

BRUN LUMINA 2



| | |
|-------------------|------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 60 X 60 X H 600 MM |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

BRUN LUMINA 3



| | |
|-------------------|------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 1200 |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| UGR | : 18 |
| DIMENSION | : Ø 60 X 80 X H 250 MM |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

BRUN

BRUN LUMIERE 1



| | |
|-------------------|-----------------------|
| WATTS | : 6W |
| ADJUSTABILITY | : 2500 |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 350 |
| LUMENS | : 550Lm |
| IP RATING | : IP65 |
| UGR | : <16 |
| DIMENSION | : Ø 95 X 140 X 180 MM |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

BRUN LUMIERE 2



| | |
|-------------------|-------------------------|
| WATTS | : 8W |
| ADJUSTABILITY | : 3500 |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 480 |
| LUMENS | : 800Lm |
| IP RATING | : IP65 |
| UGR | : <16 |
| DIMENSION | : Ø 280 X 85 X H 620 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

BRUN LUMIERE 3



| | |
|-------------------|------------------------|
| WATTS | : 8W |
| ADJUSTABILITY | : 3500 |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K) | : 3000K |
| OPTICS | : 480 |
| LUMENS | : 800Lm |
| IP RATING | : IP65 |
| UGR | : <16 |
| DIMENSION | : Ø 85 X 30 X H 800 MM |
| LAMP TYPE | : SMD |
| POWERED BY | : EDISION |

Fundamental of Lighting - Part 4

Powering LEDs The Role of the Driver

An LED driver is an electronic device that converts the incoming electrical supply to the appropriate voltage and current required to power LED lights. This precise regulation is essential for LED longevity and optimal performance.

Constant Current Drivers : Most common for LEDs, providing a fixed output current regardless of voltage fluctuations. This ensures consistent brightness and extends LED lifespan.

Constant Voltage Drivers : Supply a fixed output voltage, often used with LED strips or modules that have built-in current regulation.

Thermal Management The Importance of Heat Sinks

A heat sink is a passive heat exchanger component, typically made of aluminum or copper, designed to dissipate heat generated by LEDs or their drivers. Efficient thermal management is vital for:

Preventing Overheating : High temperatures can severely degrade LED performance and accelerate lumen depreciation.

Extending LED Lifespan : Maintaining optimal operating temperatures significantly increases the operational life of LED components.

Maintaining Performance : Ensures consistent light output, colour stability, and overall efficiency throughout the fixture's life.

PRIME OUTDOOR SERIES



PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|---------------------------------|
| WATTS | : 8W (OUTDOOR BULKHEAD) |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K, 4000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : DIA-190 MM X D-75 MM |
| LUMENS | : 520Lm |
| IP RATING | : IP65 |
| IK RATING | : IK10 |
| INPUT VOLTAGE | : AC DRIVERLESS |
| LAMP TYPE | : SMD 2835 LED |
| POWERED BY | : EPISTAR |

**PRO ELEGANT SMALL**

| | |
|-------------------|---------------------------------|
| WATTS | : 13W (OUTDOOR BULKHEAD) |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K, 4000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : DIA-245 MM X D-75 MM |
| LUMENS | : 970Lm |
| IP RATING | : IP65 |
| IK RATING | : IK10 |
| INPUT VOLTAGE | : AC DRIVERLESS |
| LAMP TYPE | : SMD 2835 LED |
| POWERED BY | : EPISTAR |

**PRO ELEGANT MEDIUM**

| | |
|-------------------|---------------------------------|
| WATTS | : 18W (OUTDOOR BULKHEAD) |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K, 4000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : DIA-310 MM X D-75 MM |
| LUMENS | : 1100Lm |
| IP RATING | : IP65 |
| IK RATING | : IK10 |
| INPUT VOLTAGE | : AC DRIVERLESS |
| LAMP TYPE | : SMD 2835 LED |
| POWERED BY | : EPISTAR |

**PRO ELEGANT BIG**

| | |
|-------------------|---------------------------------|
| WATTS | : 9W (OUTDOOR BULKHEAD) |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K, 4000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : W-245 MM X D-69 MM X H-139 MM |
| LUMENS | : 550Lm |
| IP RATING | : IP65 |
| IK RATING | : IK10 |
| INPUT VOLTAGE | : AC DRIVERLESS |
| LAMP TYPE | : SMD 2835 LED |
| POWERED BY | : EPISTAR |

**PRO ELEGANT OVAL**

| | |
|-------------------|---------------------|
| WATTS | : 25W |
| FINISH & MATERIAL | : PLASTIC BODY |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : DIA 280 X H 60 MM |
| LUMENS | : 2000Lm |
| IP RATING | : IP65 |
| POWERED BY | : DRIVER ON BOARD |

**PRO CELLAR**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|---------------------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 45 X H 160MM |
| LUMENS | : 4000Lm |
| IP RATING | : IP65 |
| IK RATING | : IK08 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO PORCH SMALL**

| | |
|-------------------|---------------------------------|
| WATTS | : 14W |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 50 X H 220MM |
| LUMENS | : 850Lm |
| IP RATING | : IP65 |
| IK RATING | : IK08 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO PORCH BIG**

| | |
|-------------------|--------------------------------|
| WATTS | : GU10 HOLDER |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER | : GLASS DIFFUSER |
| DIMENSION | : 88 X 88 X H 92MM |
| IP RATING | : IP65 |
| POWERED BY | : GU10 NOT INCLUDED |

**PRO DROP SQUARE**

| | |
|-------------------|--------------------------------|
| WATTS | : GU10 HOLDER |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER | : GLASS DIFFUSER |
| DIMENSION | : DIA 90 X H 100MM |
| IP RATING | : IP65 |
| POWERED BY | : GU10 NOT INCLUDED |

**PRO DROP ROUND**

| | |
|-------------------|---------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : BLACK & ALUMINIUM |
| CCT(K) | : 3000K |
| DIMENSION | : 60 X H 61 MM |
| LUMENS | : 700Lm |
| IP RATING | : IP54 |
| LAMP TYPE | : LED |
| POWERED BY | : BRIDGELUX |

**PRO TIAN 1**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
FINISH & MATERIAL : BLACK & ALUMINIUM
CCT(K) : 3000K
DIMENSION : 75 X H 75 MM
LUMENS : 1200Lm
IP RATING : IP65
LAMP TYPE : LED
POWERED BY : BRIDGELUX

**PRO TIAN 2**

WATTS : 18W
FINISH & MATERIAL : BLACK & ALUMINIUM
CCT(K) : 3000K
DIMENSION : 90 X H 90 MM
LUMENS : 1800Lm
IP RATING : IP65
LAMP TYPE : LED
POWERED BY : BRIDGELUX

**PRO TIAN 3**

WATTS : 3W
FINISH & MATERIAL : GRAPHITE BLACK & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 60 X H 16 MM
LUMENS : 270Lm
IP RATING : IP54
LAMP TYPE : COB
POWERED BY : BRIDGELUX

**CLIP**

WATTS : 5W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 60 X H 110 MM
LUMENS : 500Lm
IP RATING : IP65
LAMP TYPE : LED
POWERED BY : CREE

**PROP C28**

WATTS : 5W (Adjustable)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 63 x H 170 MM
LUMENS : 500Lm
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP C59**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|-----------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 90 X 150 MM |
| LUMENS | : 1200Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PROP C25**

| | |
|-------------------|-----------------------------------|
| WATTS | : 18W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : Ø 88 x H 235 MM |
| LUMENS | : 1800Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PROP C60**

| | |
|-------------------|---------------------|
| WATTS | : 8W |
| FINISH & MATERIAL | : BLACK & ALUMINIUM |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K |
| CRI | : ≥80 |
| DIMENSION | : 90 X 46MM |
| LUMENS | : 720Lm |
| IP | : IP65 |

**PROP EMY 1**

| | |
|-------------------|---------------------|
| WATTS | : 14W |
| FINISH & MATERIAL | : BLACK & ALUMINIUM |
| BEAM ANGLE | : 110° |
| CCT(K) | : 3000K |
| CRI | : ≥80 |
| DIMENSION | : 140 X 46MM |
| LUMENS | : 1260Lm |
| IP | : IP65 |

**PROP EMY 2**

| | |
|-------------------|---------------------------------|
| WATTS | : 6W (OUTDOOR WALL LIGHT) |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. DIE-CAST |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : W 220 MM X D-77 MM X H-90 MM |
| LUMENS | : 500Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PRO ENERGY SMALL**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|---------------------------------|
| WATTS | : 12W (OUTDOOR WALL LIGHT) |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. DIE-CAST |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : W 300 MM X D-97 MM X H-120 MM |
| LUMENS | : 800Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PRO ENERGY BIG**

| | |
|-------------------|---------------------------------|
| WATTS | : 8W (OUTDOOR WALL LIGHT) |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. DIE-CAST |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC |
| DIMENSION | : W 60 MM X D-60 MM X H-144 MM |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| INPUT VOLTAGE | : AC DRIVERLESS |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO AERO SMALL**

| | |
|-------------------|------------------------------------|
| WATTS | : 13W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 200 X 30 X H 135MM |
| LUMENS | : 650Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO AERO BRICK**

| | |
|-------------------|------------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : PC DIFFUSER |
| DIMENSION | : 215 X H 125MM |
| LUMENS | : 1000Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : EPISTAR |

**PRO PORCH IVY**

| | |
|-------------------|------------------------------------|
| WATTS | : 10W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 200 X 85 X H 135MM |
| LUMENS | : 700Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO LUCY**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|------------------------------------|
| WATTS | : 2 X 5W = 10W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : PC DIFFUSER |
| DIMENSION | : 115 X H120MM |
| LUMENS | : 2 X 400Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PRO ROCK**

| | |
|-------------------|------------------------------------|
| WATTS | : 12W |
| SENSOR | : MOVEMENT SENSOR |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 165 X 200 X H 153MM |
| LUMENS | : 900Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO MOTION**

| | |
|-------------------|--------------------------------|
| WATTS | : 30W |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 264 X 117 X H 308MM |
| IP RATING | : IP65 |
| POWERED BY | : SMD LED |

**PRO WOLLARD**

| | |
|-------------------|----------------------------------|
| WATTS | : 9W SMD LED |
| FINISH & MATERIAL | : GRAPHITE GREY + ALUMINIUM + PC |
| CCT(K) | : 3000K |
| DIMENSION | : H 210 x W 130 x D 103 MM |
| IP RATING | : IP65 |

**PRO FLINT**

| | |
|-------------------|--------------------------------|
| WATTS | : 2 x 9W |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER | : GLASS DIFFUSER |
| CCT(K) | : 3000K |
| DIMENSION | : DIA 85 X 83 X H 210MM |
| IP RATING | : IP65 |
| POWERED BY | : CREE |

**PRO LEVIS**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 7W
 FINISH & MATERIAL : GRAPHITE GREY & STEEL
 CCT(K) : 3000K
 DIFFUSER : GLASS DIFFUSER
 DIMENSION : 110 X 320 X H 860MM
 LUMENS : 670Lm
 IP RATING : IP54
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO BOSARO 1**

WATTS : 7W
 FINISH & MATERIAL : GRAPHITE GREY & STEEL
 CCT(K) : 3000K
 DIFFUSER : GLASS DIFFUSER
 DIMENSION : 130 X 320 X H 310MM
 LUMENS : 670Lm
 IP RATING : IP54
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO BOSARO 2**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM + PC
 CCT(K) : 3000K
 DIMENSION : 160 X 100 X 87 H MM
 IP RATING : IP65
 LAMP TYPE : LED

**PROP W48**

WATTS : 6W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 96 X 153 MM
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : EDISON

**PROP W52**

WATTS : 9W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 165 X 118 MM
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : OSRAM

**PROP W53**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 4 x 3W = 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 77 X 77 X H 57 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W33**

WATTS : 2 x 3W = 6W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 77 X 77 X H 57 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W34**

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 65 X H 100 MM
 LUMENS : 500Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W26**

WATTS : 2 x 5W = 10W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 65 X H 175 MM
 LUMENS : 1000Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W27**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 90 X H 135 MM
 LUMENS : 1200Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W23**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|--|
| WATTS | : 2 x 12W = 24W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K) | : 3000K |
| DIMENSION | : 90 X H 240 MM |
| LUMENS | : 2400Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PROP W24**

| | |
|-------------------|-----------------------------------|
| WATTS | : 1 x 12W (350 Degree Rotatable) |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 102 x 116 x 150 MM |
| LUMENS | : 960Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD |
| POWERED BY | : CREE |

**PROP W57**

| | |
|-------------------|-----------------------------------|
| WATTS | : 2 x 12W (350 Degree Rotatable) |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 102 x 217 x 150 MM |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD |
| POWERED BY | : CREE |

**PROP W58**

| | |
|-------------------|---|
| WATTS | : 5W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALUMINIUM |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 240 X 37 X H 75MM |
| LUMENS | : 300Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO ENERGY BELLE**

| | |
|-------------------|---|
| WATTS | : 9W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALUMINIUM |
| CCT(K) | : 3000K |
| DIFFUSER | : GLASS DIFFUSER |
| DIMENSION | : 262 X 53 X H 55MM |
| LUMENS | : 650Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : LED |
| POWERED BY | : EPISTAR |

**PRO BRICK**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY ALUMINIUM BODY
 CCT(K) : 3000K
 DIFFUSER : CLEAR PC DIFFUSER
 DIMENSION : 250 X 90 X H 98 MM
 IP RATING : IP65
 POWERED BY : SMD LED

**PRO PARKER**

WATTS : 4W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 90 X 60 MM
 LUMENS : 560Lm
 IP RATING : IP65
 LAMP TYPE : SMD
 POWERED BY : EDISON

**PROP F11**

WATTS : 8W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 150 X H 70 MM
 IP RATING : IP65
 LAMP TYPE : SMD
 POWERED BY : EDISON

**PROP F12**

WATTS : 3W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 80 x H 75 MM
 LUMENS : 270Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W21**

WATTS : 2 x 3W = 6W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 80 X H 140 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE


**PROP W22**

PRODUCT DESCRIPTION**PRODUCT**


| | |
|-------------------|---------------------------|
| WATTS | : 6W |
| FINISH & MATERIAL | : BLACK & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : L 80 x W 38 x H 80 MM |
| LUMENS | : 600Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : COB |
| POWERED BY | : BRIDGELUX |

**SPREAD**

| | |
|-----------|------------------------|
| WATTS | : 4W |
| FINISH | : GRAPHITE GREY |
| MATERIAL | : ALUMINIUM DIE CASTED |
| DIFFUSER | : PC DIFFUSER |
| CCT(K) | : 3000K |
| DIMENSION | : 105 x H 105 MM |
| IP | : IP65 |

**PROP W40**

| | |
|-----------|------------------------|
| WATTS | : 4W |
| FINISH | : GRAPHITE GREY |
| MATERIAL | : ALUMINIUM DIE CASTED |
| DIFFUSER | : PC DIFFUSER |
| CCT(K) | : 3000K |
| DIMENSION | : DIA 115 MM |
| IP | : IP65 |

**PROP W41**

| | |
|-------------------|-----------------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : Ø 95 X 60 MM |
| IP RATING | : IP65 |
| LAMP TYPE | : LED |
| POWERED BY | : OSRAM |

**PROP F45**

| | |
|-------------------|-----------------------------------|
| WATTS | : 3W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 95 X 95 X 60 MM |
| IP RATING | : IP65 |
| LAMP TYPE | : LED |
| POWERED BY | : OSRAM |

**PROP F46**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 250 X 45 X 45 H MM
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : CREE

**PROP F47**

WATTS : 6W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 135 x 80 x H 75 MM
 IP RATING : IP65
 LAMP TYPE : SMD

**PROP F13**

WATTS : 3W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 45 x 84 x H 84 MM
 IP RATING : IP65
 LAMP TYPE : SMD

**PROP F14**

WATTS : OUTDOOR SPOTLIGHT WITH SPIKE
 FINISH & MATERIAL : GRAPHITE GREY & ABS + PC BODY
 DIFFUSER : CLEAR PC DIFFUSER
 DIMENSION : W 80 MM X D-130 MM X H-113 MM
 IP RATING : IP65
 LAMP TYPE : GU10 LED MAX 6W (LAMP EXCLUDED)

**PRO RADIUS**

WATTS : OUTDOOR SPOTLIGHT WITH SPIKE
 FINISH & MATERIAL : GRAPHITE GREY & ALU. DIE-CAST
 DIFFUSER : CLEAR GLASS
 DIMENSION : D 98 x 95 x 59 MM
 IP RATING : IP65
 LAMP TYPE : GU10 MAX 6W (LAMP EXCLUDED)

**PRO RISE**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : GU10 (Not Included)
 FINISH & MATERIAL : BLACK & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : Ø 60 x H 113 MM
 IP RATING : IP65

**SPIKE GU10**

WATTS : 3W
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 45 X 68 X H 160 MM
 LUMENS : 300Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CROM

**PRO ORSA 1**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 66 X 100 X H 160 MM
 LUMENS : 1200Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CROM

**PRO ORSA 2**

WATTS : 7W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 91 X 64 X H 186 MM
 LUMENS : 560Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP S29**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 95 x 84 x H 186 MM
 LUMENS : 1080Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP S30**



PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W (OUTDOOR WALL LIGHT)
 FINISH & MATERIAL : GRAPHITE GREY & ALU. DIE-CAST
 CCT(K) : 3000K
 DIFFUSER : CLEAR GLASS
 DIMENSION : W 160 MM X D-235 MM X H-95 MM
 LUMENS : 800Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE



PRO AROUND

WATTS : 9W
 FINISH & MATERIAL : GRAPHITE GREY & ALU. DIE-CAST
 BEAM ANGLE : ADJUSTABLE BEAM ANGLE (30°-60°)
 CCT(K) : 3000K
 DIFFUSER : CLEAR GLASS
 DIMENSION : W 85 MM X D-154 MM X H-150 MM
 LUMENS : 800Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE



PRO ARISE

WATTS : 15W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 BEAM ANGLE : 15°x 45°
 CCT(K) : 3000K
 DIMENSION : W 40 X H 30 X L 500 MM
 IP RATING : IP67
 LAMP TYPE : PCB
 INPUT : **DC 24V (Driver not Included)**
 POWERED BY : OSRAM



PRO VENICE 1

WATTS : 30W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 BEAM ANGLE : 15°x 45°
 CCT(K) : 3000K
 DIMENSION : W 40 X H 30 X L 1000 MM
 IP RATING : IP67
 LAMP TYPE : PCB
 INPUT : **DC 24V (Driver not Included)**
 POWERED BY : OSRAM



PRO VENICE 2

WATTS : 2 X 1W = 2W
 (SURFACE MOUNTED GROUND LIGHT)
 FINISH & MATERIAL : GRAPHITE GREY & ALU. DIE-CAST
 CCT(K) : 3000K
 DIFFUSER : CLEAR PC
 DIMENSION : DIA 210 MM X D-50 MM
 IP RATING : IP67
 IK RATING : IK10
 MAX WEIGHT : 2000KG
 POWERED BY : CREE



PRO TWIN

PRODUCT DESCRIPTION**PRODUCT**

| | |
|-------------------|---|
| WATTS | : 4 X 1W = 4W (SURFACE MOUNTED GROUND LIGHT) |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. DIE-CAST |
| CCT(K) | : 3000K |
| DIFFUSER | : CLEAR PC |
| DIMENSION | : DIA 210 MM X D-50 MM |
| IP RATING | : IP67 |
| IK RATING | : IK10 |
| MAX WEIGHT | : 2000KG |
| POWERED BY | : CREE |

**PRO QUARDO**

| | |
|-------------------|------------------------------------|
| WATTS | : 9W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 107 X H 140MM |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO POLAR 2**

| | |
|-------------------|------------------------------------|
| WATTS | : 9W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 107 X H 400MM |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO POLAR 3**

| | |
|-------------------|------------------------------------|
| WATTS | : 9W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 107 X H 600MM |
| LUMENS | : 720Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO POLAR 4**

| | |
|-------------------|---------------------------------|
| WATTS | : 5W |
| FINISH & MATERIAL | : BLACK & DIE CASTING ALUMINIUM |
| CCT(K) | : 3000K |
| DIFFUSER | : OPAL PC DIFFUSER |
| DIMENSION | : 200 X 140 X H 50 MM |
| LUMENS | : 500Lm |
| IP RATING | : IP65 |
| LAMP TYPE | : SMD LED |
| POWERED BY | : EPISTAR |

**PRO POLISH 1**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 5W
 FINISH & MATERIAL : BLACK & DIE CASTING ALUMINIUM
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 200 X H 800 X 50 MM
 LUMENS : 500Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO POLISH 2**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTING ALU.
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 100 X 100 X H 150MM
 LUMENS : 600Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO TRONO 1**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTING ALU.
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 100 X 100 X H 500MM
 LUMENS : 600Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO TRONO 2**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTING ALU.
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 100 X 100 X H 800MM
 LUMENS : 600Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO TRONO 3**

WATTS : 6W
 FINISH & MATERIAL : GRAPHITE GREY ALUMINIUM BODY
 DIFFUSER : OPAL PC DIFFUSER
 CCT(K) : 3000K
 DIMENSION : 100 X 50 X H 250MM
 IP RATING : IP65
 POWERED BY : SMD 2835

**PRO PATH**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 2 X 5W = 10W
 FINISH & MATERIAL : BLACK & DIE CASTING ALU.
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 110 X 60 X H 340 MM
 LUMENS : 1100Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO POT 1**

WATTS : 2 X 5W = 10W
 FINISH & MATERIAL : BLACK & DIE CASTING ALU.
 CCT(K) : 3000K
 DIFFUSER : OPAL PC DIFFUSER
 DIMENSION : 110 X 60 X H 770 MM
 LUMENS : 1100Lm
 IP RATING : IP65
 LAMP TYPE : SMD LED
 POWERED BY : EPISTAR

**PRO POT 2**

WATTS : 12W SMD LED (SPIKE LIGHT)
 FINISH & MATERIAL : GRAPHITE GREY & ALU. + PC
 CCT(K) : 3000K
 DIMENSION : H 500 X W 110 X 18 MM (SPIKE 200 MM)
 IP RATING : IP65
 POWERED BY : CREE
 WIRE : 1 MTR. CABLE

**PRO CHARCOAL**

WATTS : 3W
 FINISH & MATERIAL : BLACK & DIE CASTING ALU.
 CCT(K) : 3000K
 DIMENSION : 120 X H 240 MM
 LUMENS : 270Lm
 IP RATING : IP65
 POWERED BY : OSRAM

**PRO CUBO 1**

WATTS : E27 HOLDER
 FINISH & MATERIAL : BLACK & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 200 X W 200 X H 335 MM
 IP RATING : IP65
 POWERED BY : LAMP NOT INCLUDED

**PRO PYRAMID 1**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
 FINISH & MATERIAL : BLACK & DIE CASTING ALU.
 CCT(K) : 3000K
 DIMENSION : 103 X H 350 MM
 IP RATING : IP65
 POWERED BY : EPISTAR

**PRO AQUA 1**

WATTS : 12W
 FINISH & MATERIAL : BLACK & DIE CASTING ALU.
 CCT(K) : 3000K
 DIMENSION : 103 X H 600 MM
 IP RATING : IP65
 POWERED BY : EPISTAR

**PRO AQUA 2**

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : Ø 89 x 90 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP W64**

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 500 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP B65**

WATTS : 12W + 2W (Switch Changing)
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 500 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP B66**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 CCT(K) : 3000K
 DIMENSION : 45 x H 180 MM
 IP : IP65
 POWERED BY : EDISON

**PROP W36**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 190 X 160 MM
 LUMENS : 960Lm
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : EDISON

**PROP W20**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 180 X 500MM
 LUMENS : 960Lm
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : EDISON

**PROP B19**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 DIFFUSER : PC DIFFUSER
 CCT(K) : 3000K
 DIMENSION : 105 x H 290 MM
 IP : IP65

**PROP W37**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 DIFFUSER : PC DIFFUSER
 CCT(K) : 3000K
 DIMENSION : 105 x H 305 MM
 IP : IP65

**PROP G38**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 DIFFUSER : PC DIFFUSER
 CCT(K) : 3000K
 DIMENSION : 105 x H 500 MM
 IP : IP65

**PROP B39**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 CCT(K) : 3000K
 DIMENSION : D 140 x H 254 MM
 IP : IP65
 POWERED BY : CREE

**PROP B49**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 CCT(K) : 3000K
 DIMENSION : D 140 x H 508 MM
 IP : IP65
 POWERED BY : CREE

**PROP B50**

WATTS : 12W
 FINISH : GRAPHITE GREY
 MATERIAL : ALUMINIUM DIE CASTED
 CCT(K) : 3000K
 DIMENSION : D 140 x H 762 MM
 IP : IP65
 POWERED BY : CREE

**PROP B51**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 254 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP B67**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B68**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 254 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B69**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B70**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 254 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B71**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B72**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 762 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP B73**

WATTS : 2 x 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 762 MM
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE

**PROP B74**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : H 330 MM
 IP RATING : IP65
 LAMP TYPE : SMD
 POWERED BY : BRIDGELUX

**PROP W75**

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : H 510 MM
 IP RATING : IP65
 LAMP TYPE : SMD
 POWERED BY : BRIDGELUX

**PROP B76**

WATTS : E-27 (Lamp not Included)
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 DIMENSION : 180 x 760 MM
 IP RATING : IP54

**PROP B15**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 X 500 MM
IP RATING : IP65

**PROP B16**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 x 230 MM
IP RATING : IP65

**PROP G17**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 x 230 MM
IP RATING : IP65

**PROP W18**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 210 x H 205 MM
IP RATING : IP65

**PROP G42**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : Ø 210 x H 205 MM
IP RATING : IP65

**PROP W61**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 215 X H 200 MM
IP RATING : IP65

**PROP G43**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : Ø 215 x H 500 MM
IP RATING : IP65

**PROP B62**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : Ø 215 x H 200 MM
IP RATING : IP65

**PROP W63**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 254 X H 254 MM
IP RATING : IP65

**PROP G44**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 153 x H 153 MM
IP RATING : IP65

**PROP G54**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|-----------------------------------|
| WATT | : 20W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : 2 FT. × D 75 MM |
| IP RATING | : IP65 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO ENTICER 1**

| | |
|------------|-----------------------------------|
| WATT | : 35W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : 4 FT. × D 75 MM |
| IP RATING | : IP65 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO ENTICER 2**

| | |
|------------|-----------------------------------|
| WATT | : 50W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : 8 FT. × D 75 MM |
| IP RATING | : IP65 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO ENTICER 3**

| | |
|------------|-----------------------------------|
| WATT | : 50W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : D 395 MM × H 275 MM |
| IP RATING | : IP65 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO POST TOP 1**

| | |
|------------|-----------------------------------|
| WATT | : 50W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : D 395 MM × H 65 MM |
| IP RATING | : IP65 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO POST TOP 2**

PRODUCT DESCRIPTION**PRODUCT**

| | |
|------------|---------------------------------|
| WATT | : 2 X 50W |
| MATERIAL | : PC DIFFUSER + DIE CAST ALU. |
| FINISH | : GRAPHITE GREY |
| CCT(K) | : 3000K |
| DIAMENTION | : L 920 MM × H 65 MM |
| IP RATING | : IP54 |
| DRIVER | : PRISHA ISOLATED OR EQUIVALENT |
| POWERED BY | : BRIDGELUX |

**PRO POST TOP 3**

| | |
|------------|---------------------------|
| ONLY POLE | |
| MATERIAL | : DIE CAST ALUMINUM |
| FINISH | : GRAPHITE GREY |
| DIAMENTION | : HEIGHT 10 FT. X D 75 MM |

**PRO POLE 1**

| | |
|-------------------|-----------------------------------|
| WATTS | : 7W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 85 X 90 MM |
| LUMENS | : 560Lm |
| IP RATING | : IP54 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PRO P U31**

| | |
|-------------------|-----------------------------------|
| WATTS | : 12W |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K) | : 3000K |
| DIMENSION | : 110 X H 100 MM |
| LUMENS | : 960Lm |
| IP RATING | : IP54 |
| LAMP TYPE | : COB |
| POWERED BY | : CREE |

**PRO P U32**

PRISHA-TECH



PIXELLUX

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step


Life Time

> 50,000h


Colour Rendering Index - Optional

90 95 98

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour



- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Machined Parts



SPECIFICATIONS


| | |
|---------------|-----------------------------------|
| Model No. | PIXELLUX |
| Input Voltage | AC 220V |
| Power | 8W 15W |
| Material | Aluminum |
| Lamp Size | 8W - Ø52*H108mm (Cutout: Ø45) |
| | 15W - Ø72*H113mm (Cutout: Ø65) |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | Eaglerise / Tridonic (Optional) |

(Note: Front Openable)

INSETA

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step

Life Time


> 50,000h

Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

| | |
|---------------|--|
| Model No. | INSETA |
| Input Voltage | AC 220V |
| Power | 12W 18W 25W 35W |
| Material | Aluminum |
| Lamp Size | 12W - $\Phi 84 \times H 63.5$ mm Cutout: $\Phi 75$ mm |
| | 18W - $\Phi 106 \times H 68$ mm Cutout: $\Phi 95$ mm |
| | 25W - $\Phi 140 \times H 81$ mm Cutout: $\Phi 125$ mm |
| | 35W - $\Phi 170 \times H 81$ mm Cutout: $\Phi 145$ mm |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | Eaglerise / Tridonic (Optional) |

CORTIVA

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional


2 Step / 3 Step

Life Time


> 50,000h

Colour Rendering Index - Optional


90 95 98

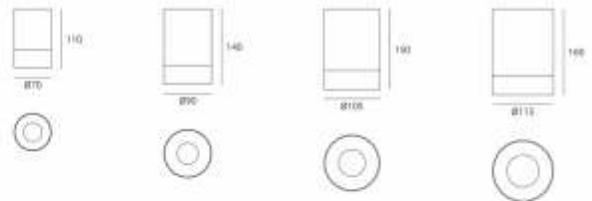

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

Matt Black
 Matt White

Finishing

Matt White
 Matt Black

Fabrication Method

Precision Machined Parts


SPECIFICATIONS

| | |
|------------------|---------------------------------|
| Model No. | CORTIVA |
| Input Voltage | AC 220V |
| Power | 8W 15W 25W 35W |
| Cutting Hole Cut | NA |
| Material | Aluminum |
| Lamp Size | 8W - Φ 70*H110mm |
| | 15W - Φ 90*H140mm |
| | 25W - Φ 105*H150mm |
| | 35W - Φ 115*H160mm |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | Eaglerise / Tridonic (Optional) |

LUXBLADE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi





SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h



Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Casting

SPECIFICATIONS

| | |
|---------------|---|
| Model No. | LUXBLADE |
| Input Voltage | AC 220V |
| Power | 5*2W 10*2W |
| Material | Aluminum |
| Lamp Size | 5*2W - 147*45*H52mm (Cutout: 138*37) 10*2W - 280*45*H52mm (Cutout: 275*37) |
| Led Type | SMD |
| Led Brand | Bridgelux |
| Driver Brand | Eaglerise / Tridonic (Optional) |



RETAILUX

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX S12
Casambi



SDCM - Optional

2 Step / 3 Step


Life Time

> 50,000h


Colour Rendering Index - Optional

90 95 98

Beam Angle



Color Temperature [CCT]



Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

| | |
|---------------|---|
| Model No. | RETAILUX |
| Input Voltage | AC 220V |
| Power | 20W |
| Material | Aluminum |
| Lamp Size | 20W - Φ 92.5*H100mm Cutout: Φ 90 |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | Eaglerise / Tridonic (Optional) |

TRAXLINE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX S12
Casambi



SDCM - Optional


2 Step / 3 Step

Life Time


> 50,000h

Colour Rendering Index - Optional


90 95 98

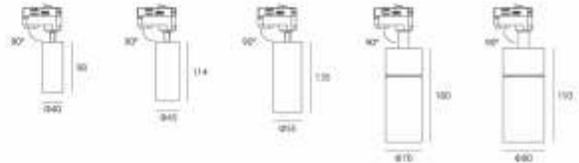

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

| | |
|---------------|---------------------------------|
| Model No. | TRAXLINE |
| Input Voltage | AC 220V |
| Power | 10W 15W 20W 25W 35W |
| Mounting | Track Mount |
| Material | Aluminum |
| Lamp Size | 10W - Ø40*H98mm |
| | 15W - Ø45*H114mm |
| | 20W - Ø55*H135mm |
| | 25W - Ø70*H180mm |
| | 35W - Ø80*H193mm |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | Eaglerise / Tridonic (Optional) |



FLEXLUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step

Life Time



> 50,000h

Colour Rendering Index


90 95 98




Beam Angle



Color Temperature [CCT]



Lamp Cup Colour



Finishing




Fabrication Method

Precision Machined Parts

SPECIFICATIONS

| | |
|------------------|--|
| Model No. | FLEXLUX |
| Input Voltage | DC 24V |
| Power | 5W 3*5W 5*5W |
| Cutting Hole Cut | NA |
| Material | Aluminum |
| Lamp Size | 5W - 104*33*H57.5mm 3*5W - 294*33*H57.5mm 5*5W - 484*33*H57.5mm |
| Led Type | SMD |
| Led Brand | Bridgelux |
| Driver Brand | 24V Driver Extra |

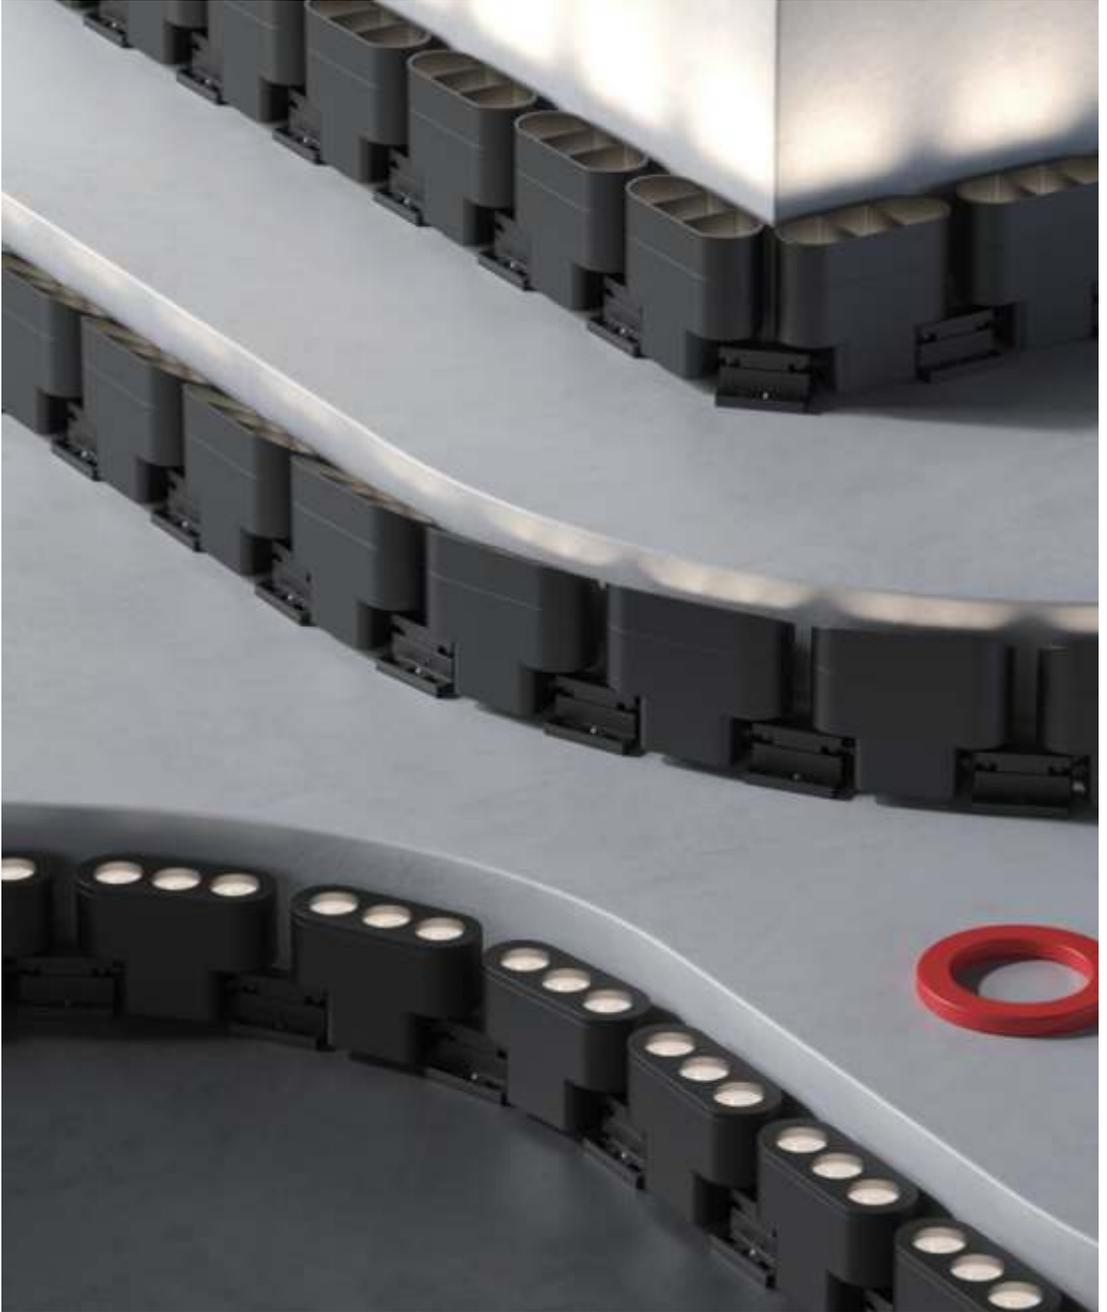

SPYDOT

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step


Life Time

> 50,000h



Colour Rendering Index


90 95 98

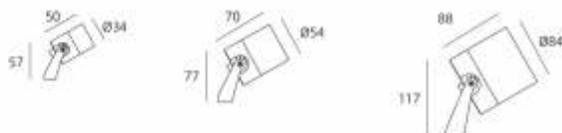

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

-  Matt Black
-  Matt White

Finishing

- Matt White
- Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

| | |
|------------------|---------------------|
| Model No. | SPYDOT |
| Input Voltage | DC 24V |
| Power | 5W 8W 12W |
| Cutting Hole Cut | NA |
| Material | Aluminum |
| Lamp Size | 5W - Ø34*50*H57mm |
| | 8W - Ø54*70*H77mm |
| | 12W - Ø84*88*H117mm |
| Led Type | COB |
| Led Brand | Citizen |
| Driver Brand | 24V Driver Extra |

AXILUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step

Life Time

50,000h


Colour Rendering Index

90 95 98

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour


Matt Black
 Matt White

Finishing

Matt White
 Matt Black
 As per Image


Fabrication Method

Precision Machined Parts

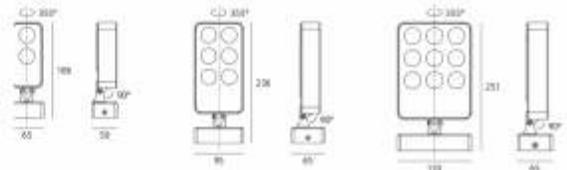

| SPECIFICATIONS | |
|----------------|--------------------|
| Model No. | AXILUX |
| Input Voltage | AC 220V |
| Power | 6W 15W 25W |
| Material | Aluminum |
| Lamp Size | 6W - 65*50*186mm |
| | 15W - 95*65*236mm |
| | 25W - 135*65*251mm |
| Led Type | SMD |
| Led Brand | Bridgelux |

WALLVO



SPECIFICATIONS

| | | |
|---------------------|--|------------------------------|
| Product Code | WALLVO | |
| LED Brand | OSRAM (SMD) | OSRAM RGBW (SMD) |
| Rated Power | 25W (12 PCS) / 48W (24 PCS) | 48W (12 PCS) / 72W (24 PCS) |
| Input Voltage | AC 100 - 277V / DC24V | DC24V |
| Frequency Range | 50 / 60Hz | 50 / 60Hz |
| Colour | 3000k (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K / 4000K / 6500K) |
| Beam Angle | 2.5° 5° 15° 25° 35° 45° 60° | 12° 25° 45° 60° |
| Control Mode | On / Off | DMX512 |
| Life | 50000H | 50000H |
| Protection Grade | Ip65 | Ip65 |
| Ambient Temperature | -20° C - +45° C | -20° C - +45° C |



SMD



OPTICAL CONTROLLING ACCESSORIES




WALLVO

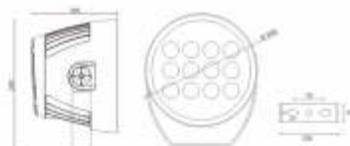

SPECIFICATIONS

| | | |
|---------------------|--|---------------------------------|
| Product Code | WALLVO | |
| LED Brand | OSRAM (SMD) | OSRAM RGBW (SMD) |
| Rated Power | 100W (48 PCS) / 250W (108 x 2W) | 150W (48 PCS) / 350W (36 x 10W) |
| Input Voltage | AC 100 - 277V / DC24V | DC24V |
| Frequency Range | 50 / 60Hz | 50 / 60Hz |
| Colour | 3000k (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K/4000K/6500K) |
| Beam Angle | 2.5° 15° 25° 35° 45° 60° | 12° 25° 45° 60° |
| Control Mode | On / Off | DMX512 |
| Life | 50000H | 50000H |
| Protection Grade | Ip65 | Ip65 |
| Ambient Temperature | -20° C - +45° C | -20° C - +45° C |

SMD




OPTICAL CONTROLLING ACCESSORIES






4WARD



4WARD - 15W



4WARD - 25W



4WARD - 45W

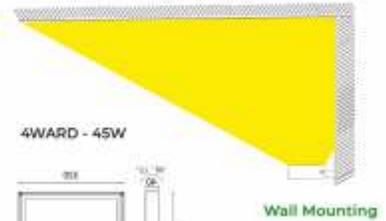

Wall Mounting




SPECIFICATIONS

| | | | |
|---------------------|-----------------|-----------------|-----------------|
| Product Code | 4WARD | | |
| LED Brand | CREE (COB) | CREE (COB) | CREE (COB) |
| Rated Power | 15W (1 * 15W) | 25W (2 * 10W) | 45W (4 * 10W) |
| Input Voltage | AC 100 - 277V | AC 100 - 277V | AC 100 - 277V |
| Frequency Range | 50 / 60Hz | 50 / 60Hz | 50 / 60Hz |
| Colour | 3000K | 3000K | 3000K |
| Beam Angle | 45° * 90° | 45° * 90° | 45° * 90° |
| Control Mode | On / Off | On / Off | On / Off |
| Life | 50000H | 50000H | 50000H |
| Protection Grade | Ip65 | Ip65 | Ip65 |
| Ambient Temperature | -20° C - +45° C | -20° C - +45° C | -20° C - +45° C |

(LED colour also available on request 2700K, 4000K, 6500K)


BINOCS



SPECIFICATIONS

| | | |
|---------------------|--|--------------------------|
| Product Code | BINOCS | |
| LED Brand | CREE (SMD) | CREE (COB) |
| Rated Power | 120W (54 PCS) | 160W (3 PCS) |
| Input Voltage | AC 100 - 277V | AC 100 - 277V |
| Frequency Range | 50 / 60Hz | / |
| Colour | 3000K (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K/4000K/6500K) |
| Beam Angle | 5° 15° 25° 30° 45° 60° | 15° 24° 38° |
| Control Mode | On / Off | On / Off |
| Life | 50000H | 50000H |
| Protection Grade | Ip65 | Ip65 |
| Ambient Temperature | -20° C - +45°C | -20° C - +45°C |

SMD




OPTICAL CONTROLLING ACCESSORIES




WINLINE

XH-31107B



XH-31107A

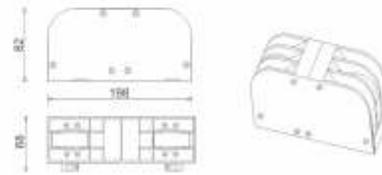


SPECIFICATIONS

| | | |
|---------------------|--|--|
| Product Code | WINLINE | |
| LED Brand | OSRAM (SMD) | OSRAM (SMD) |
| Rated Power | 6 W (3 PCS) | 12 W (6 PCS) |
| Input Voltage | AC 100 - 277V | AC 100 - 277V |
| Frequency Range | 50 / 60Hz | 50 / 60Hz |
| Colour | 3000k (On Request Available - 2700k, 4000k, 6500k) | 3000k (On Request - 2700k, 4000k, 6500k) |
| Beam Angle | 5 * 99° | 5 * 160° |
| Control Mode | On / Off | On / Off |
| Life | 50000H | 50000H |
| Protection Grade | Ip65 | Ip65 |
| Ambient Temperature | -20° C - +45°C | -20° C - +45°C |



LUMIROD

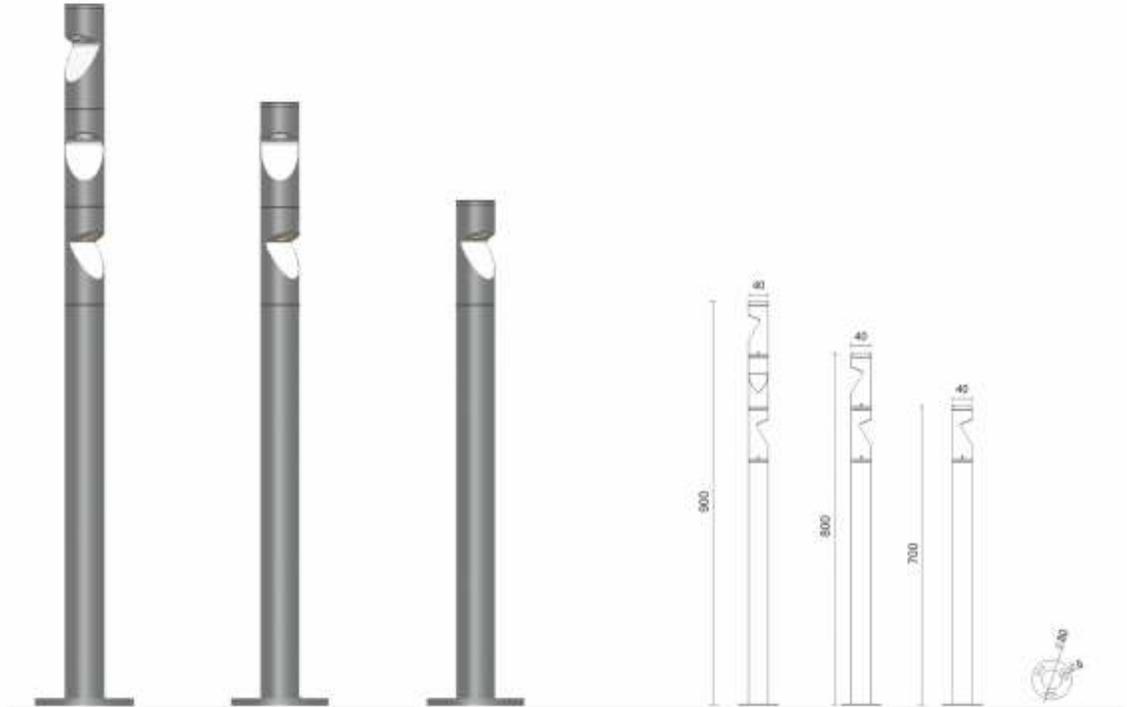

SPECIFICATIONS

| | |
|---------------------|--|
| Product Code | LUMIROD |
| LED Brand | CREE |
| Rated Power | 3W (1 * 3W) 6W (2 * 3W) 9W (3 * 3W) |
| Input Voltage | AC 100 - 277V |
| Frequency Range | 50Hz / 60Hz |
| Colour | 3000K (On Request Available - 2700k, 4000k, 6500k) |
| Beam Angle | 90° |
| Control Mode | On / Off |
| Life | 50000H |
| Protection Grade | Ip65 |
| Ambient Temperature | -20° C - +45°C |



WATTS : 5W
 CCT(K) : 3000K
 BEAM ANGLE : 15°/38°/60°
 DIMENSION : 50 X H 123 MM
 IP RATING : IP66
 IK RATING : IK06
 POWERED BY : CREE



1W
 3W
 5W
 12W
 24W



WATTS : 9W
 CCT(K) : 3000K
 BEAM ANGLE : 15°/38°/60°
 DIMENSION : 64 X H 146 MM
 IP RATING : IP66
 IK RATING : IK06
 POWERED BY : CREE



WATTS : 15W
 CCT(K) : 3000K
 BEAM ANGLE : 15°/38°/60°
 DIMENSION : 77 X H 176 MM
 IP RATING : IP66
 IK RATING : IK06
 POWERED BY : CREE



“Our History
is similar to a tree:
Solid values
anchored in the Roots,
continuous Evolution
from the leaves,
but always
searching for the Light.”

GENERAL TERMS & CONDITIONS

- PRICES ARE IN INDIAN RUPEES.
- ALL PRICES ARE SUBJECT TO LIGHT INSIDE GENERAL TERMS & CONDITIONS OF BUSINESS.
- GOODS ARE DESPATCHED BY US ON PURCHASER'S RISK. ALL CLAIMS FOR LOSS, DAMAGE OR SHORTAGE WILL BE FILLED BY THE PURCHASERS DIRECTLY WITH THE CARRIERS.
- DESIGN CHANGES IS ROUTINE PRACTICE AT PRISHA ILLUMINATION FOR BETTER IMPROVEMENT DATA PROVIDED MAY CHANGE WITHOUT ANY PRIOR INTIMATION. CUSTOMERS ARE ADVISED TO RECONFIRM THE DATA OR PRODUCTS DIMENSIONS BEFORE PURCHASE.
- PRICES ARE SUBJECTS TO CHANGE WITHOUT ANY PRIOR INTIMATION.
- ORDERS SHOULD BE PLACED AGAINST THE CONFIRMED PURCHASE ORDER ONLY.
- WARRANTY BECOMES VOID IF THE PRODUCT IS IMPROPERLY APPLIED AND IF THE DAMAGE IS CAUSED BY IMPROPER USE OR INSTALLATION.
- FUNDAMENTAL FAILURE'S THAT WILL NOT BE CONSIDERED FOR WARRANTY, PHYSICAL DAMAGE OF ANY COMPONENTS OR PRODUCT , DUE TO IMPROPER HANDLING.
- COLOUR OF THE PRODUCT IN PHOTO MAY VARY FROM THE ACTUAL PRODUCT.
- DISPUTES, IF ANY ARE SUBJECT TO AHMEDABAD JURIDICTION ONLY.
- ALL DEALERS / CUSTOMERS ARE ADVISED TO TAKE MATERIAL/ORDER AFTER APPROVING PHYSICAL SAMPLE. DIMENSIONS AND CUT OUT AS MENTIONED IN PRICE LIST MAY VARY FROM ACTUAL PRODUCT AS PER LOT TO LOT. FURTHER NO CLAIM WE WILL BE ENTERTAINED BY COMPANY.

Marketed by :

LIGHT | INSIDE PVT LTD

FF-1/2, Maruti Arcade, Shivranjani Cross Road, Satellite, Ahmedabad-380 015.
Gujarat. India. Cell : +91 96879 71231 +91 98254 31492

E-mail : prishaillumination@lightinside.in • dhaval@prishaillumination.com

Website : www.prishaillumination.com



For more details